

# **Muratec MFX-1200**

## **FACSIMILE SYSTEM**

### **FIELD ENGINEERING MANUAL**

***US version 1.0***


**(August 30, 2000)**

**MURATA MACHINERY, LTD**  
COMMUNICATION EQUIPMENT DIV.

# Safety Information

## LED Safety Label

A LED safety label is attached to the outside of the machine as shown below.

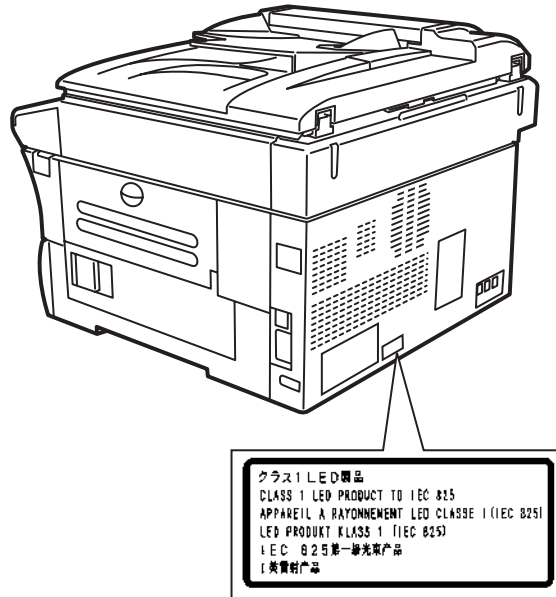

## Battery Precautions

### CAUTION

Danger of explosion if battery is incorrectly replaced.

Replace only with the same or equivalent type recommended by the manufacturer.

Dispose of used batteries according to the manufacturer's instructions.

**Important: Muratec does not recommend the independent replacement of this battery. The battery is sold only as a component part of the main control PCB and Battery PCB, and cannot be purchased separately from Muratec.**

*Il y a un danger d'explosion s'il y a un remplacement incorrect de la batterie.*

*Remplacer uniquement avec une batterie du même type ou d'un type recommandé par le constructeur.*

*Mettre au rebut les batteries usagées conformément aux instructions du fabricant.*

Germany only

### VORSICHT!

Explosionsgefahr bei unsachgemäßen austausch der batterie.

Ersatz nur durch denselben oder einen vom hersteller empfohlenen ähnlichen typ. Entsorgung gebrauchter batterien nach angaben des herstellers.

Denmark only

### ADVARSEL!

Lithiumbatteri - Eksplosionsfare ved fejlagtig håndtering

Udskiftning må kun ske med batteri af samme fabrikat og type.

Levér det brugte batteri tilbage til leverandøren.

Norway only

### ADVARSEL

Eksplosjonsfare ved feilaktig skifte av batteri.

Benytt samme batteritype eller en tilsvarende type anbefalt av apparatfabrikanten.

Brukte batterier kasseres i henhold til fabrikantens instruksjoner.

Sweden only

VARNING

Explosionsfara vid felaktigt batteribyte.

Använd samma batterityp eller en ekvivalent typ som rekommenderas av apparattillverkaren.

Kassera använt batteri enligt fabrikantens instruktion.

Finland only

VAROITUS

Paristo voi räjähtää, jos se on virheellisesti asennettu.

Vaihda paristo ainoastaan laitevalmistajan suosittelemaan tyyppiin.

Hävitä Käytetty paristo valmistajan ohjeiden mukaisesti.

ALL Areas

CAUTION

“Replace only with the same or equivalent type recommended by the manufacturer.

Dispose of used IC Package according to the manufacturer’s instructions.”

Germany only

VORSICHT!

⇒Austausch nur durch denselben oder einen vom Hersteller empfohlenen,  
gleichwertigen typ. Entsorgung gebrauchter Batterien nach Angaben des Herstellers.

# Table of Contents

<b>Safety Information .....</b>	<b>1</b>
LED Safety Label.....	1
Battery Precautions .....	1
<b>Section 1 General Description.....</b>	<b>1-1</b>
1.1 Product Description .....	1-1
1.2 Specifications.....	1-2
<b>Section2 Machine Composition .....</b>	<b>2-1</b>
2.1 MFX-1200 Interconnect Block Diagram (1/2) .....	2-1
MFX-1600 Interconnect Block Diagram (1/2) .....	2-3
2.2 Main Control PCB .....	2-5
2.3 Network Control Unit (NCU) PCB .....	2-6
2.4 Power Supply Unit (PSU) .....	2-7
2.5 Sensors.....	2-8
2.5.1 Sensor Locations.....	2-8
2.5.2 Sensor Descriptions .....	2-9
2.6 Document Scanning Sequence .....	2-10
2.6.1 Document Detection .....	2-10
2.6.2 Document Separation.....	2-10
2.6.3 Document Transport.....	2-10
2.6.4 Document Scanning .....	2-10
2.6.5 Document Discharge.....	2-11
2.7 Recording Section .....	2-12
2.7.1 Recording Paper Feed Path.....	2-12
2.8 Image Processing .....	2-12
2.8.1 Drum Charge .....	2-13
2.8.2 Drum Exposure .....	2-13
2.8.3 Development .....	2-13
2.8.4 Image Transfer .....	2-14
2.8.5 Residual toner distribute.....	2-14
2.8.6 Fusing.....	2-15
<b>Section3 Adjustment Procedures .....</b>	<b>3-1</b>
3.1 Field Service Program Modes .....	3-1
3.2 Machine Parameter Adjustment .....	3-3
3.2.1 Setting the Machine Parameters .....	3-3
3.2.2 Clearing the Machine Parameters .....	3-3
Machine Parameter A:0.....	3-4
Machine Parameter A:1 .....	3-4
Machine Parameter A:2.....	3-5
Machine Parameter A:3.....	3-6
Machine Parameter A:4.....	3-6
Machine Parameter A:7.....	3-7
Machine Parameter B:0.....	3-7
Machine Parameter B:1 .....	3-8
Machine Parameter B:2.....	3-8
Machine Parameter B:3.....	3-9
Machine Parameter B:4.....	3-9
Machine Parameter B:5.....	3-10
Machine Parameter B:6.....	3-10
Machine Parameter B:7.....	3-11

Machine Parameter B:8.....	3-11
Machine Parameter D:0.....	3-12
Machine Parameter D:1.....	3-12
Machine Parameter D:2.....	3-12
Machine Parameter D:3.....	3-12
Machine Parameter D:4.....	3-13
Machine Parameter D:5.....	3-13
Machine Parameter D:6.....	3-13
Machine Parameter D:7.....	3-13
Machine Parameter D:8.....	3-14
Machine Parameter D:9.....	3-14
Machine Parameter F:0.....	3-14
Machine Parameter F:1.....	3-15
Machine Parameter F:2.....	3-15
Machine Parameter F:3.....	3-16
Machine Parameter F:4.....	3-16
Machine Parameter J:0.....	3-16
Machine Parameter J:1.....	3-17
Machine Parameter J:2.....	3-17
Machine Parameter J:3.....	3-18
Machine Parameter J:4.....	3-18
3.3 Memory Switch Adjustment .....	3-19
3.3.1 Setting the Memory Switches.....	3-19
3.3.2 Clearing the Memory Switches.....	3-19
Memory Switch A:0 - Dialer.....	3-20
Memory Switch A:1 - Dialer.....	3-20
Memory Switch A:5 - Dialer.....	3-21
Memory Switch B:0 - Transmission.....	3-22
Memory Switch B:1 - Transmission.....	3-23
Memory Switch B:2 - Transmission.....	3-24
Memory Switch B:3 - Transmission.....	3-24
Memory Switch B:5 - Transmission.....	3-25
Memory Switch B:6 - Transmission.....	3-25
Memory Switch C:0 - Reception.....	3-26
Memory Switch C:1 - Reception.....	3-26
Memory Switch D:0 - Reception.....	3-27
Memory Switch D:1 - Reception.....	3-27
Memory Switch D:2 - Reception.....	3-28
Memory Switch D:3 - Reception.....	3-28
Memory Switch E:0 - Scanner.....	3-29
Memory Switch G:0 - Remote reception .....	3-29
Memory Switch G:1 - Remote reception .....	3-30
Memory Switch G:2 - Remote reception .....	3-31
Memory Switch G:3 - Remote reception and TAD interface .....	3-32
Memory Switch G:4 - Remote reception and TAD interface .....	3-33
Memory Switch G:5 - Remote reception .....	3-34
Memory Switch G:6 - Remote reception and TAD interface .....	3-34
Memory Switch H:0 - Operation .....	3-35
Memory Switch H:1 - Operation .....	3-35
Memory Switch H:2 - Operation .....	3-36
3.4 Clear Programmed Data / User Settings .....	3-36
3.5 All RAM Clear .....	3-37
3.6 Setting Individual Autodialer Attributes .....	3-37
3.7 Unique Switch Adjustment.....	3-41
3.7.1 Setting the Unique Switches.....	3-41
Clearing the Unique Switches .....	3-41
Unique Switch a:0 — Dialer.....	3-42
Unique Switch b:0 - Transmission.....	3-42

Unique Switch b:6 - Transmission .....	3-43
Unique Switch b:7 — Transmission .....	3-43
Unique Switch b:8 - Transmission .....	3-44
Unique Switch c:0 - Reception .....	3-44
Unique Switch c:1 - Reception .....	3-45
Unique Switch c:2 - Reception .....	3-46
Unique Switch c:3 - Reception .....	3-46
Unique Switch d:0 - Modem .....	3-47
Unique Switch d:1 - Modem .....	3-47
Unique Switch d:2 - Modem .....	3-48
Unique Switch d:6 - Modem .....	3-48
Unique Switch d:7 - Modem .....	3-49
Unique Switch e:2 - Scanner .....	3-49
Unique Switch e:7 - Scanner .....	3-50
Unique Switch e:8 - Scanner .....	3-51
Unique Switch e:9 - Scanner .....	3-52
Unique Switch f:0 - Printer .....	3-53
Unique Switch f:1 - Printer .....	3-53
Unique Switch f:2 - Printer .....	3-54
Unique Switch f:5 - Printer .....	3-54
Unique Switch f:6 - Printer .....	3-55
Unique Switch f:7- Printer .....	3-55
Unique Switch g:0 - Remote reception .....	3-56
Unique Switch g:7 – Remote reception and TAD interface .....	3-56
Unique Switch h:0 - Operation .....	3-57
Unique Switch h:1 - Operation .....	3-57
Unique Switch h:3 - Operation .....	3-58
Unique Switch h:4 - Operation .....	3-58
Unique Switch i:7 - Miscellaneous .....	3-59
Unique Switch i:8 ~ j:3 – Factory use only .....	3-59
Unique Switch j:4 - RS-232C . . . for RS-232C only .....	3-59
Unique Switch J:5 - Miscellaneous .....	3-60
3.8 Printer maintenance mode .....	3-61
3.9 Print Service Report .....	3-62
3.10 Print Program Mode List .....	3-62
3.11 Test Modes .....	3-62
3.11.1 Life Monitor .....	3-63
3.11.2 Printer Test .....	3-64
3.11.3 Feeder test .....	3-65
3.11.4 Background Level Test .....	3-65
3.11.5 Set Background Level .....	3-65
3.12 Print Machine Parameters, Memory Switch and Unique Switch Settings .....	3-66
3.13 Factory Functions .....	3-66
3.13.1 Function List .....	3-66
3.13.2 LED Test .....	3-66
3.13.3 LCD Test .....	3-67
3.13.4 Key Panel Test .....	3-67
3.13.5 SRAM Check .....	3-68
3.13.6 DRAM Check .....	3-68
3.13.7 RTC(real time clock) Test .....	3-69
3.13.8 RS-232C Test .....	3-69
3.14 Line Tests .....	3-70
3.14.1 Relay Test .....	3-70
3.14.2 Tonal Signal Test .....	3-71
3.14.3 DTMF Output Test .....	3-73
3.15 Mirror Carriage Transfer Mode .....	3-74
3.16 Consumable order sheet .....	3-74

3.16.1 Set consumable order sheet .....	3-74
3.16.2 Print consumable order sheet .....	3-75
3.16.3 Clear consumable order sheet .....	3-75
3.17 DRAM Clear.....	3-76
3.18 Clear Life Monitor .....	3-76
3.19 Clear Optional Data .....	3-76
3.20 Set Service Code.....	3-77
3.21 Life monitor maintenance .....	3-77
3.22 JP1, JP2 Battery Backup .....	3-78
3.23 Update the software.....	3-79

## **Section4 Troubleshooting Procedures.....4-1**

4.1 Troubleshooting Outline.....	4-1
4.2 Recording Paper Jam .....	4-2
4.3 Document Feeder Jam .....	4-2
4.4 Document Feeder Multi-feeding or Skew .....	4-3
4.5 Mirror Carriage Error.....	4-3
4.6 Transmit Error.....	4-3
4.7 Transmit Black Lines .....	4-3
4.8 Cannot transmit .....	4-4
4.9 Receive Errors .....	4-4
4.10 Will not Auto-Answer .....	4-4
4.11 Clearing Jammed Paper .....	4-5
If the original document jams.....	4-5
To remove the document: .....	4-6
If a printout jams inside your machine.....	4-7
4.12. The Image Quality Problems .....	4-9
4.12.1 Blank pages.....	4-9
4.12.2 Black pages .....	4-9
4.12.3 Printout too light.....	4-10
4.12.4 Printout too dark .....	4-10
4.12.5 Blurred background .....	4-10
4.12.6 Uneven print density.....	4-11
4.12.7 Irregularities.....	4-11
4.12.8 White (Black) Line .....	4-12
4.12.9 Toner Smudges .....	4-12
4.13 LCD Error Messages .....	4-13
LCD error messages (Alphabetic list).....	4-13
4.14 Error Codes .....	4-18
Dialing errors .....	4-18
Reception errors.....	4-18
Transmission errors.....	4-19
Communication Error Messages .....	4-20
4.15 Service Call Error.....	4-21
4.15.1 Call For Service .....	4-21
4.15.2 Please Call Service .....	4-21
4.16 LCD Failure.....	4-24
4.17 General Power Failure.....	4-24
4.18 Cleaning the Unit .....	4-25
Curing frequent jams in the ADF .....	4-25
Cleaning the FBS glass, Contact glass and white pad.....	4-26
Cleaning the LED print head .....	4-26

## **Section 5 Maintenance & Adjustment.....5-1**

5.1 Maintenance schedule.....	5-2
5.2 Re/Disassemble.....	5-3
5.2.1 Covers .....	5-5
5.2.2 PCBs .....	5-13
5.2.3 Sensors .....	5-23
5.2.4 Scanning section .....	5-24
5.2.5 Printer section.....	5-36
5.3 Adjustment.....	5-48
5.3.1 Adjustment of Retard roller pressure.....	5-48

## **Section 6 Options .....6-1**

6.1 Memory Upgrade .....	6-1
Packaging contents: .....	6-1
Installation .....	6-1
6.2 Attaching an optional handset .....	6-3
Packaging contents: .....	6-3
Installation .....	6-3
6.3 RS-232C interface .....	6-4
Packaging contents: .....	6-4
Installation .....	6-4
RS-232C interface cable .....	6-6
Signal direction .....	6-6
RS-232C Test.....	6-6
6.3 Page Counter.....	6-7
Packaging contents: .....	6-7
Installation .....	6-7
6.4 AL-200 (only for MFX-1600) .....	6-8
Packaging contents: .....	6-8
Installation .....	6-8
6.5 OP-100/NP-200 .....	6-12
Packaging contents: .....	6-12
Attaching the OP-100 (and NP-200) .....	6-13
Installing the Printer driver.....	6-16
6.6 Attaching the 2-Bin tray .....	6-17
Packaging contents: .....	6-17
Installation .....	6-17
6.7 Second paper cassette .....	6-22
Packaging contents: .....	6-22
Installation .....	6-22
Setting of the Paper Size.....	6-25

© 2000 by Muratec.





# Section 1

## General Description

### 1.1 Product Description

The MFX-1200 and MFX-1600 is Multi-function product with flat bed scanner and Group 3 and V.34 HDX modem facsimile machine. Documents are printed on plain paper using dry electrophotographic printing.

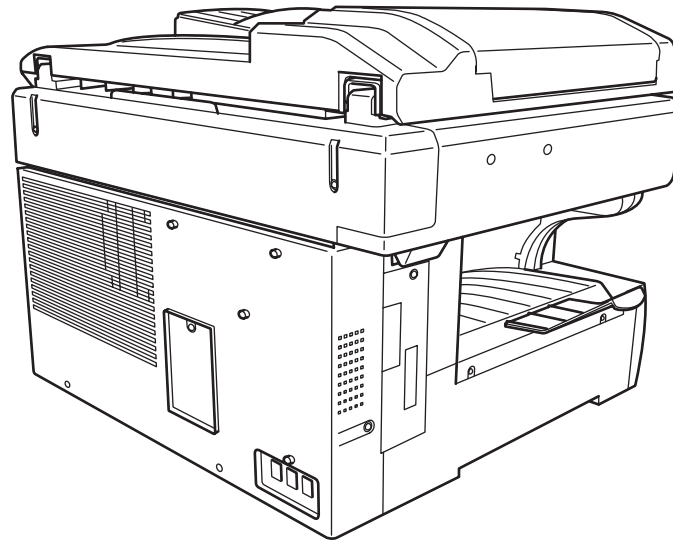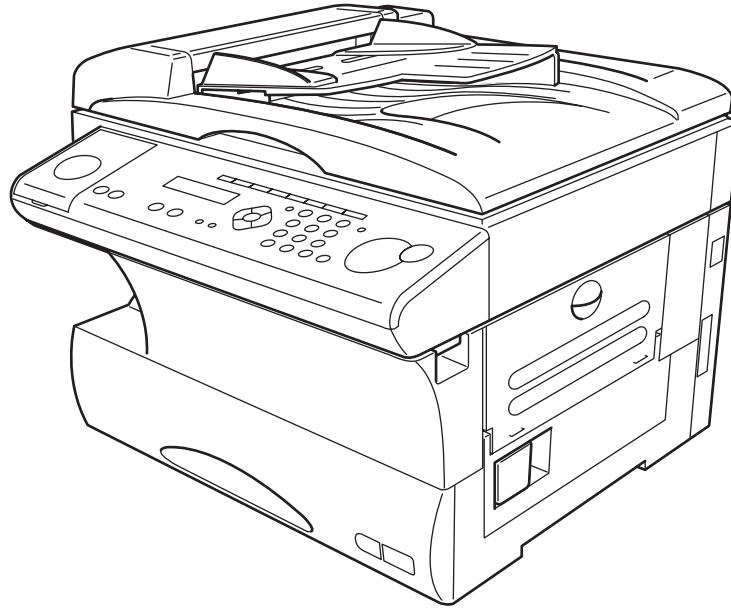


## 1.2 Specifications


Item	MFX-1200	MFX-1600
Type	Desktop type	
Telephone network	PSTN (Public Switched Telephone Network) or equivalent.	
Compatibility	ITU-T T.4 and T.30	
Coding method	ITU-T-standard MH, MR, MMR and Murata-proprietary MSE.	ITU-T-standard MH, MR, MMR, JBIG and Murata-proprietary MSE.
Modem speed	14400, 12000, 9600, 7200, 4800 and 2400 bps	33600, 31200, 28800, 26400, 24000, 21600, 19200, 16800, 14400, 12000, 9600, 7200, 4800 and 2400 bps
Dual Access	Allows up to two simultaneous operations.	Allows up to three simultaneous operations.
Display	LCD: 2 lines, 20 characters per line. Language: English, French, Spanish, Germany	
Scanning method	Flatbed CCD	
Recording method	Dry electrophotographic (LED) printer	
Acceptable document size	<div> <div>&lt;ADF&gt;</div> <div> <div>Single sheet</div> <div>Two or more sheets</div> </div> <div> <div>Max: 8.5 (W) × 35.4 (L)</div> <div>8.5 (W) × 14 (L)</div> </div> <div> <div>Min: 4.7 (W) × 3.9 (L)</div> <div>5.8 (W) × 4.1 (L)</div> </div> <div> <div>Paper weight: 13 – 24 lb</div> <div>13 – 20 lb</div> </div> </div> <div> <div>&lt;FBS glass&gt;</div> <div> <div>Max: 8.5 (W) × 14 (L)</div> <div>Min: No limit</div> </div> </div>	
Scanning resolution	<div>&lt;Transmission&gt;</div> <div>horizontal × vertical</div> <div>(in dots/inch × in lines/inch)</div> <div>Normal: 203 × 98</div> <div>Fine: 203 × 196</div> <div>Super fine: 203 × 392</div> <div>Greyscale: 203 × 196</div>	<div>&lt;Transmission&gt;</div> <div>horizontal × vertical</div> <div>(in dots/inch × in lines/inch)</div> <div>Normal: 203 × 98</div> <div>Fine: 203 × 196</div> <div>Super fine: 406 × 392*</div> <div>Greyscale: 203 × 196 (Memory Tx)</div> <div>406 × 392*(Real time Tx)</div> <div>*: In the case that the remote fax has the ability of "16 × 15.4".</div> <div>If not, the superfine resolution is "8 × 15.4", and the greyscale resolution in real time transmission is "8 × 7.7".</div>
	<Copy> 300 dpi	400 dpi
Effective Scanning width	208 mm(Fax), 210 mm(Copy)	
Transmission speed	Approx. 6 seconds Based on transmission of ITU-T Test Document 1 to a Muratec fax machine.	Approx. 2 seconds Based on transmission of ITU-T Test Document 1 to a Muratec fax machine.
Document Memory	Standard: 8 MB (630 pages) Upgrade option: plus 8MB (680 pages)	Standard: 8 MB (630 pages) Upgrade option: plus 8MB (680 pages) plus 24MB (2040 pages)
Document memory backup	(Total memory capacity : Backup time) 8 MB: 72 hours 16 MB: 36 hours 32 MB: 18 hours (MFX-1600 only) The backup battery requires about 24 hours to reach full charge after power to the fax unit is restored.	
Printing resolution	600 dpi	

Item	MFX-1200	MFX-1600
Warm-up time	Less than 20 seconds at 68° F (20° C)	
First copy time	12 seconds (using Letter-sized paper in 1st paper cassette)	10 seconds (using Letter-sized paper in 1st paper cassette)
Printing speed	12 ppm (When loading Letter-sized paper from 1st paper cassette.)	16 ppm (When loading Letter-sized paper from 1st paper cassette.)
Toner yield	Approx. 8,000 pages (Letter, 6 % document coverage under 2-pages interval printing.)	
Drum yield	Approx. 16,000 pages (Letter, 6 % document coverage under 2-pages interval printing.)	
Smoothing	Yes	
Print margin	Reading edge, Trailing edge, Left edge and Right edge: 0.12 ± 0.08 inch	
Acceptable recording paper size	<p>&lt;Paper cassette&gt;  Plain paper: A4(SEF), A5(LEF), F4(SEF)  Paper weight: 60 – 90g/m<sup>2</sup>, 20 – 24 lb</p> <p>&lt;Bypass tray&gt;  Plain paper: A4(SEF), A5(LEF)(SEF), A6(SEF), F4(SEF), Letter(SEF), Legal(SEF), Half letter(LEF), Executive(SEF)  Envelopes: DL(SEF), COM10(SEF), Monarch(SEF)  Postcard: 100 mm (W) × 148 mm (L) (3.9 × 5.8 inch)  Transparency: A4(SEF)  Custom size*: (3.8 – 8.5 inch) × (5.5 – 14 inch) (Width × Length)  *Custom sized paper is available only when the optional printer controller kit has been installed.</p>	
Recording paper capacity	<p>&lt;Paper cassette&gt;  1st cassette: 500 sheets  2nd cassette (option): 500 sheets</p> <p>&lt;Bypass tray&gt;  Plain paper: 50 sheet  Postcard/Transparency: 20 sheets  Envelopes 1 sheet</p>	
Receive paper tray capacity	Approx. 300 sheets with optional 2-bin tray: Upper approx. 100, Lower approx. 150 sheets	
Printouts exit	Face up	
Environmental conditions	Ambient temperature: 10 °C to 32 °C (50 °F to 89.6 °F) Relative humidity: 20 % to 80 % with no condensation	
Power requirements	230 VAC ± 10 %; 50/60 Hz	
Power consumption	Sleep mode (Heater off) 16.0 W Standby: 17.3 W Memory Transmission: 18.2 W Reception: 18.4 W Copying: 1340 W Maximum: 1360 W	Sleep mode (Heater off) 19.0 W Standby (Heater off): 21.2 W Memory Transmission: 22.0 W Reception: 23.1 W Copying: 1060 W Maximum: 1150 W
Dimensions	2WAY: 20.1 (W) × 19.4 (D) × 14.8 (H) inch 3WAY: 20.1 (W) × 19.4 (D) × 19.0 (H) inch When the Extension paper tray and Bypass tray are retracted.	
Weight	Approx. 23.3 Kg (51.4 lbs) without consumables and trays.	
Optional products	<ul style="list-style-type: none"> <li>• Optional telephone handset</li> <li>• 2nd paper cassette</li> <li>• Printer controller kit</li> <li>• Network interface card</li> <li>• Second phone line kit (only for MFX-1600)</li> <li>• RS-232C interface kit</li> <li>• Mechanical page counter</li> </ul>	

## 2.1 MFX-1200 Interconnect Block Diagram (1/2)



## MFX-1200 Interconnect Block Diagram (2/2)

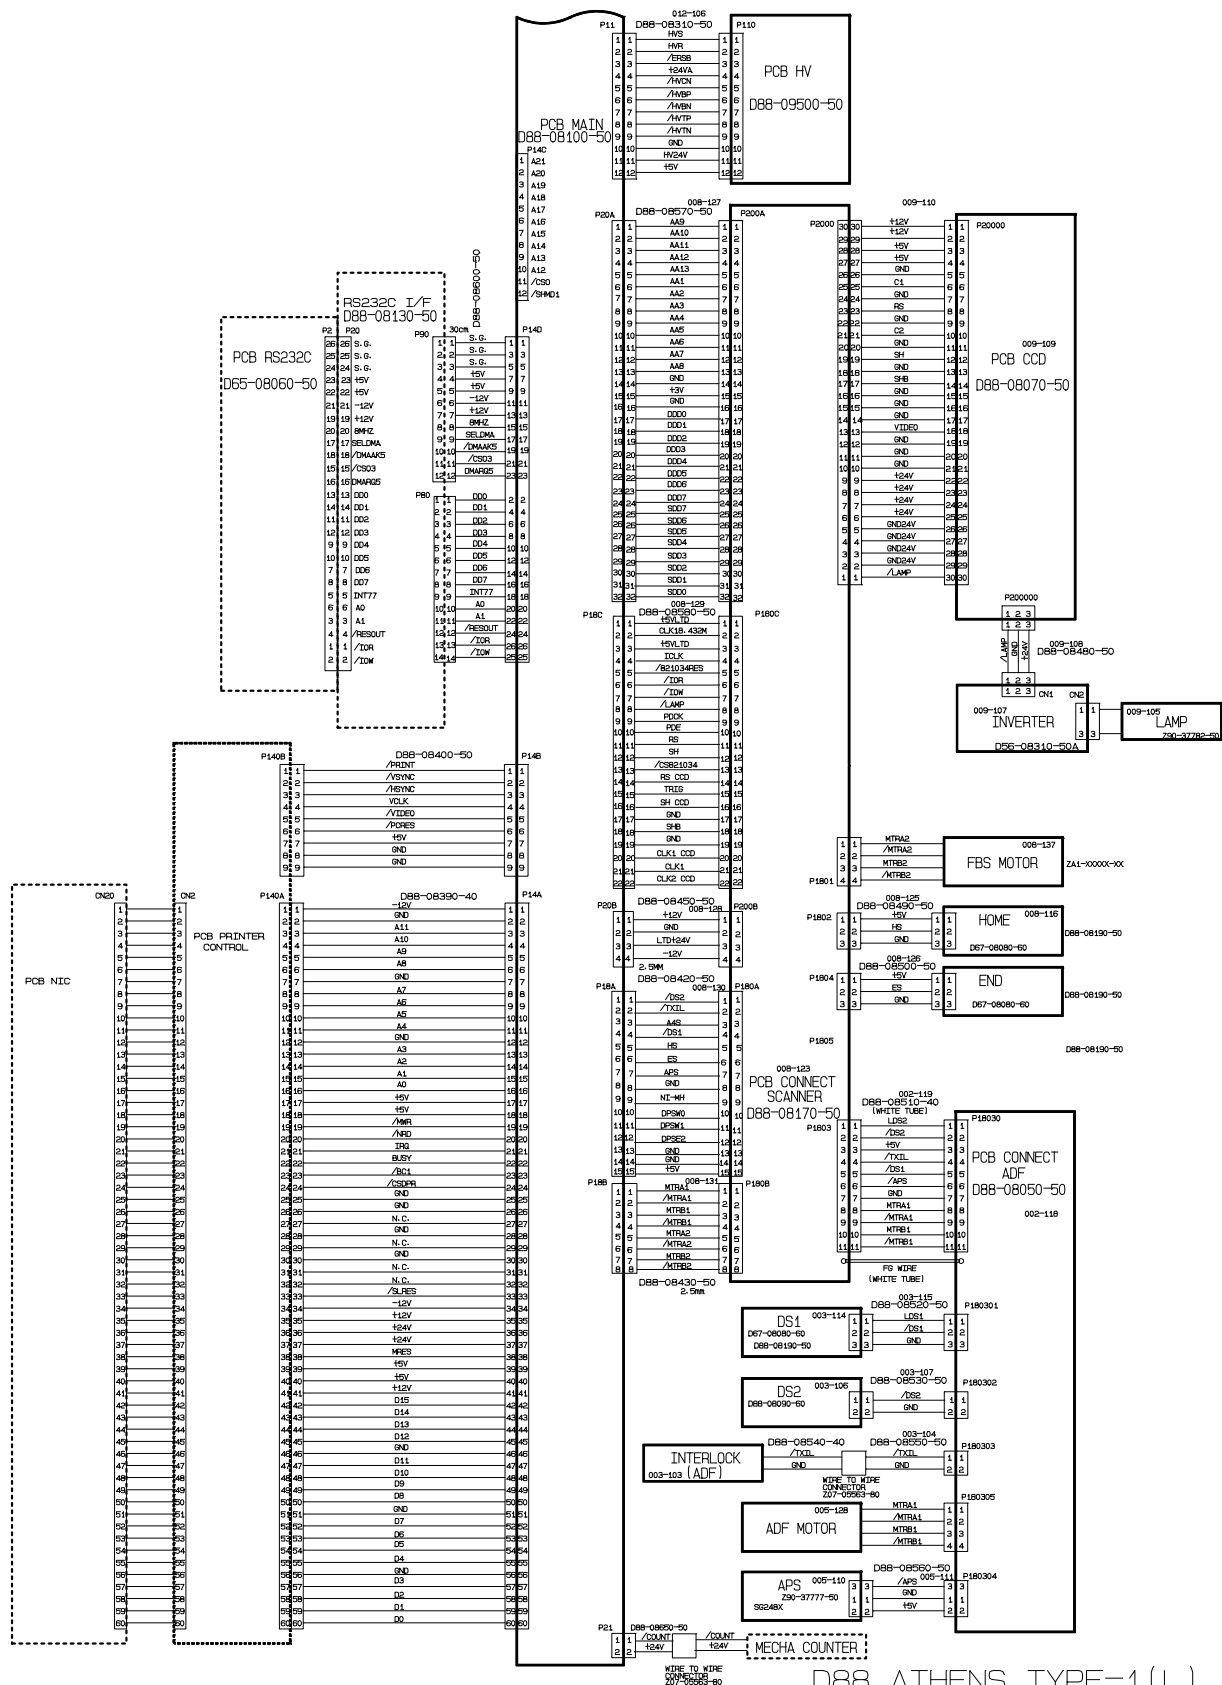

D88 ATHENS TYPE-1(L)  
CONNECTION DIAGRAM 2/2

## **MFX-1600 Interconnect Block Diagram (1/2)**

TBD

## **MFX-1600 Interconnect Block Diagram (2/2)**

TBD


## 2.2 Main Control PCB

The main control PCB controls the operations of all machine functions.

Jumper JP2 on the main control PCB is used for battery back-up of the SDRAM. Removing JP2 will initialize the SDRAM. If the power is turned off, the battery will provide up to 72 hours (8MB) of back-up when fully charged.

Jumper JP1 on the main control PCB is used for battery back-up of the SRAM. All user programmed data and internal memory switch settings are held in SRAM. Removing JP1 will initialize the SRAM. If the power is turned off, the battery will provide up to five years of back-up when fully charged.

**NOTE:** JP1, JP2 should remain in the "ON" position at all times.

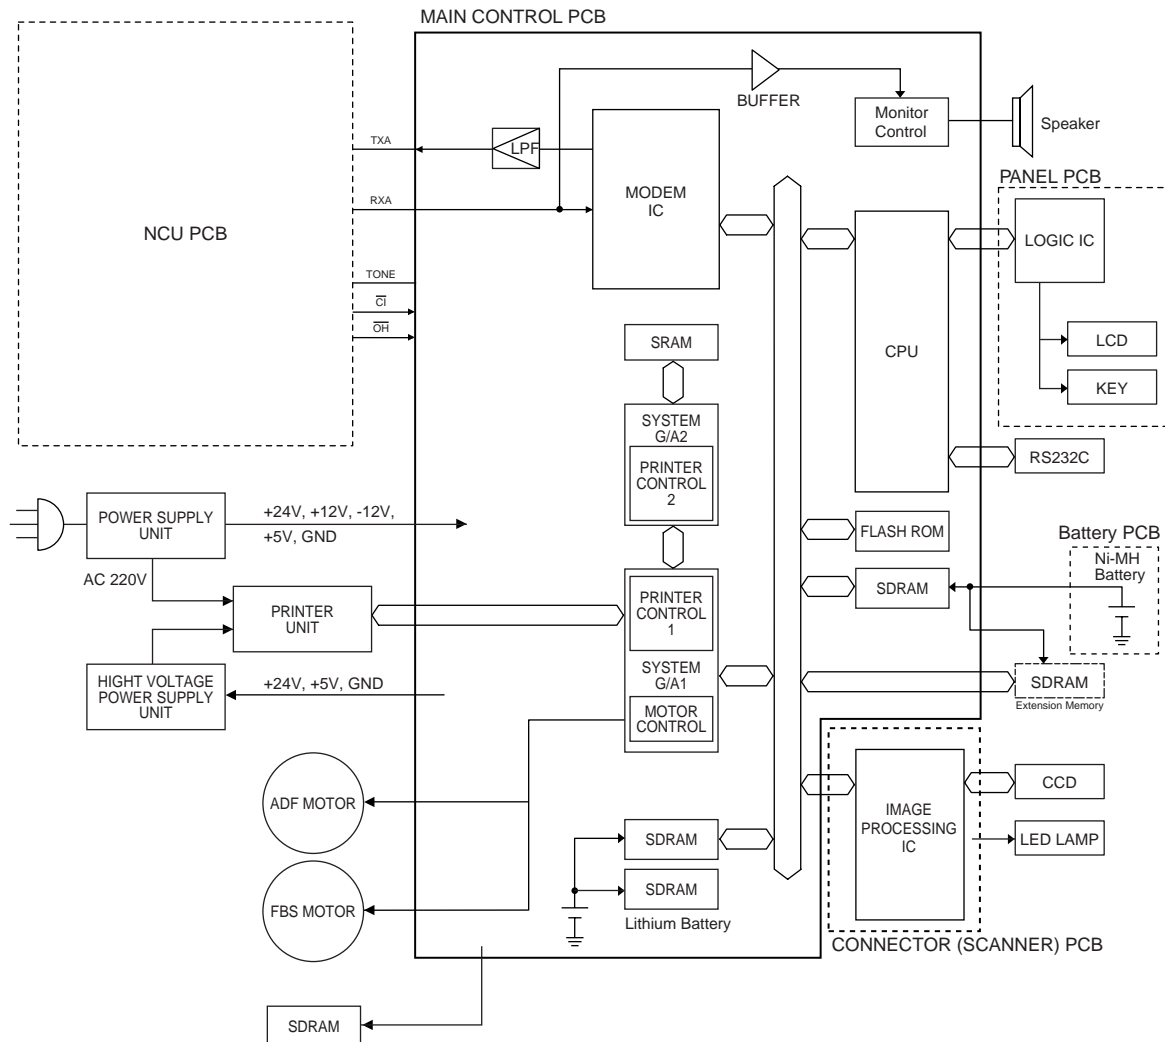

Main control PCB block diagram

Memory (FLASH MEMORY, SRAM, SDRAM)

**FLASH MEMORY** –The FLASH MEMORY contains all program instructions for unit operation.


**SRAM** –The SRAM, which is backed-up by a lithium battery is used to store user programmed information.

**SDRAM** –The SDRAM is used for buffer, which is backed-up by a battery is used to store memorized documents.



## 2.3 Network Control Unit (NCU) PCB

The NCU PCB provides the connection to the telephone line. It consists of the interface circuit, dial pulse generator, ring signal detector and telephone control circuit.

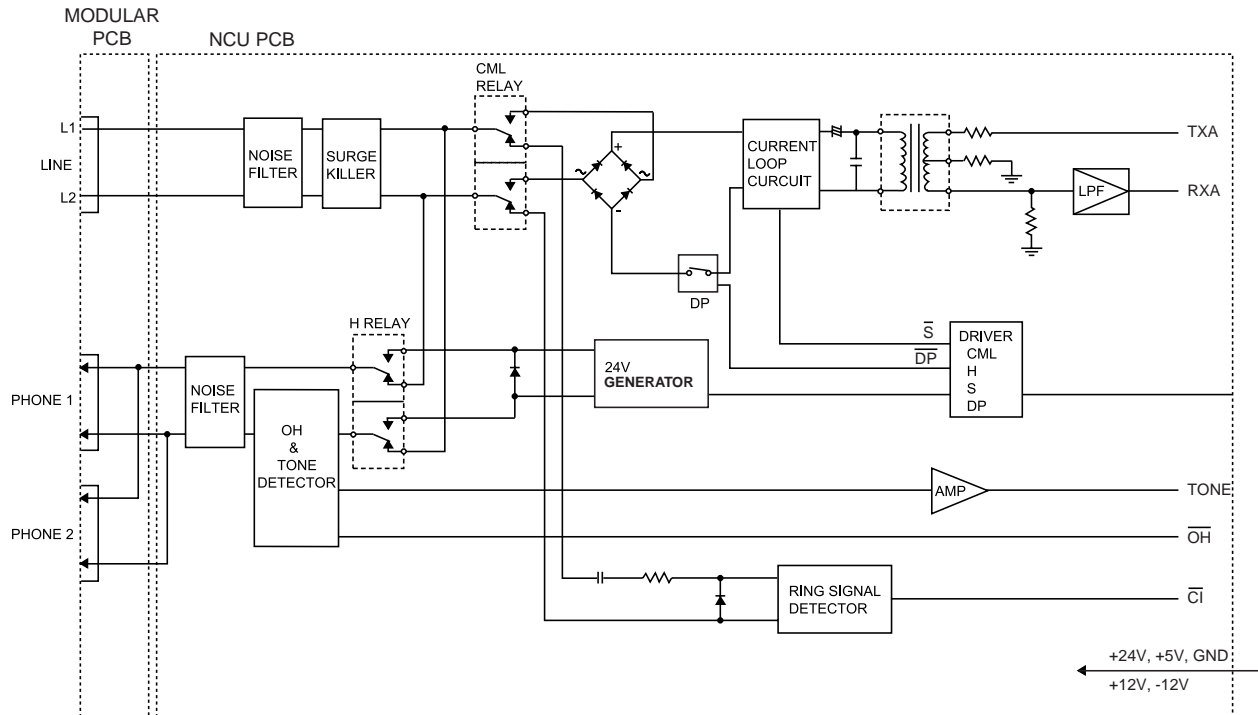

NCU PCB block diagram

### Major components of the NCU

#### CML relay

Connects the telephone line to the phone or fax.

#### S relay

Used to send dial pulse signals in pulse dialing.

#### OH & Tone detector

Detects the On-hook condition of the second telephone unit.

#### H relay

Connects the Tel1 and Tel2 line to the fax machine.

#### 24V generator

Supplies 24 volts to the relays.

#### Ring signal detector


A photo coupler that detects an incoming ring.

## 2.4 Power Supply Unit (PSU)

The power supply unit receives the input line voltage and currents it to output voltages of +5 VDC, +24 VDC, +12 VDC, and -12 VDC.

The heater circuit output voltage to the fuser heater according to instructions received from the heater control circuit.

If an over-current is sensed in the secondary circuit, power is interrupted.

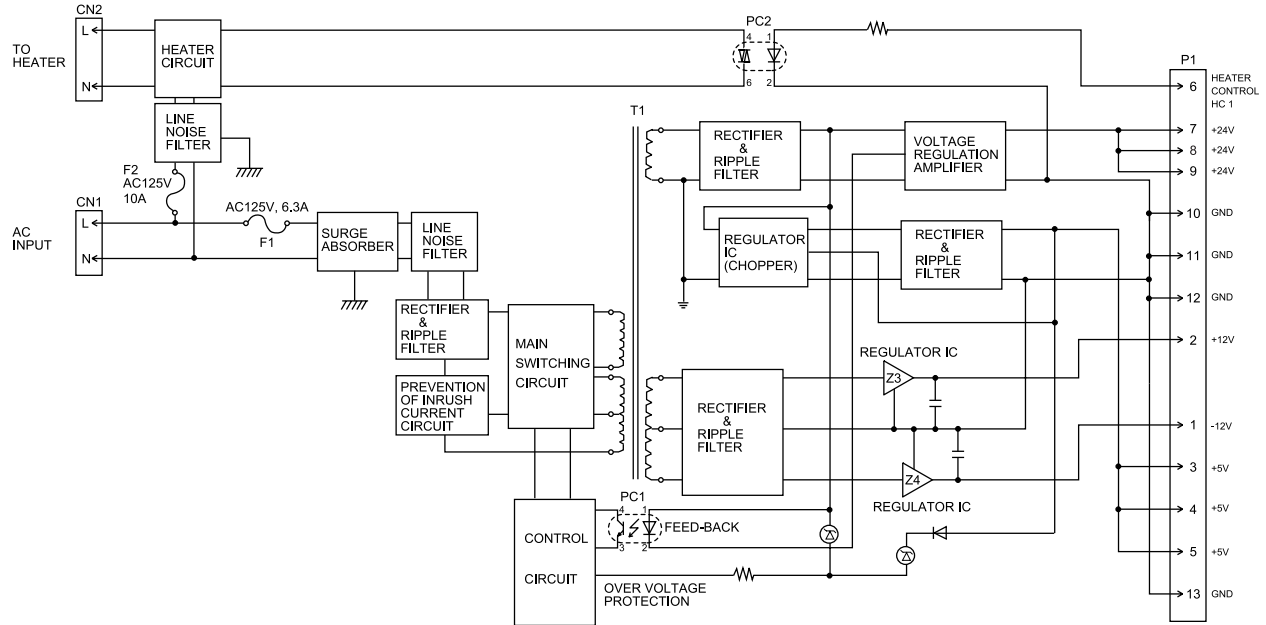

Power supply unit block diagram

The power supply unit has two output connectors. The following table shows the connector outputs:

**CN1** – to the Fuser Heater

Pin No.	1	2
Output	L	N


**CN2** – to the Main Control PCB.

Pin No.	1	2	3	4	5	6	7	8	9	10	11	12	13
Output voltage	-12V	+12V	+5V			HC1	+24V			GND			

## 2.5 Sensors

### 2.5.1 Sensor Locations

The following illustration shows the relative positions of the machine's sensors.

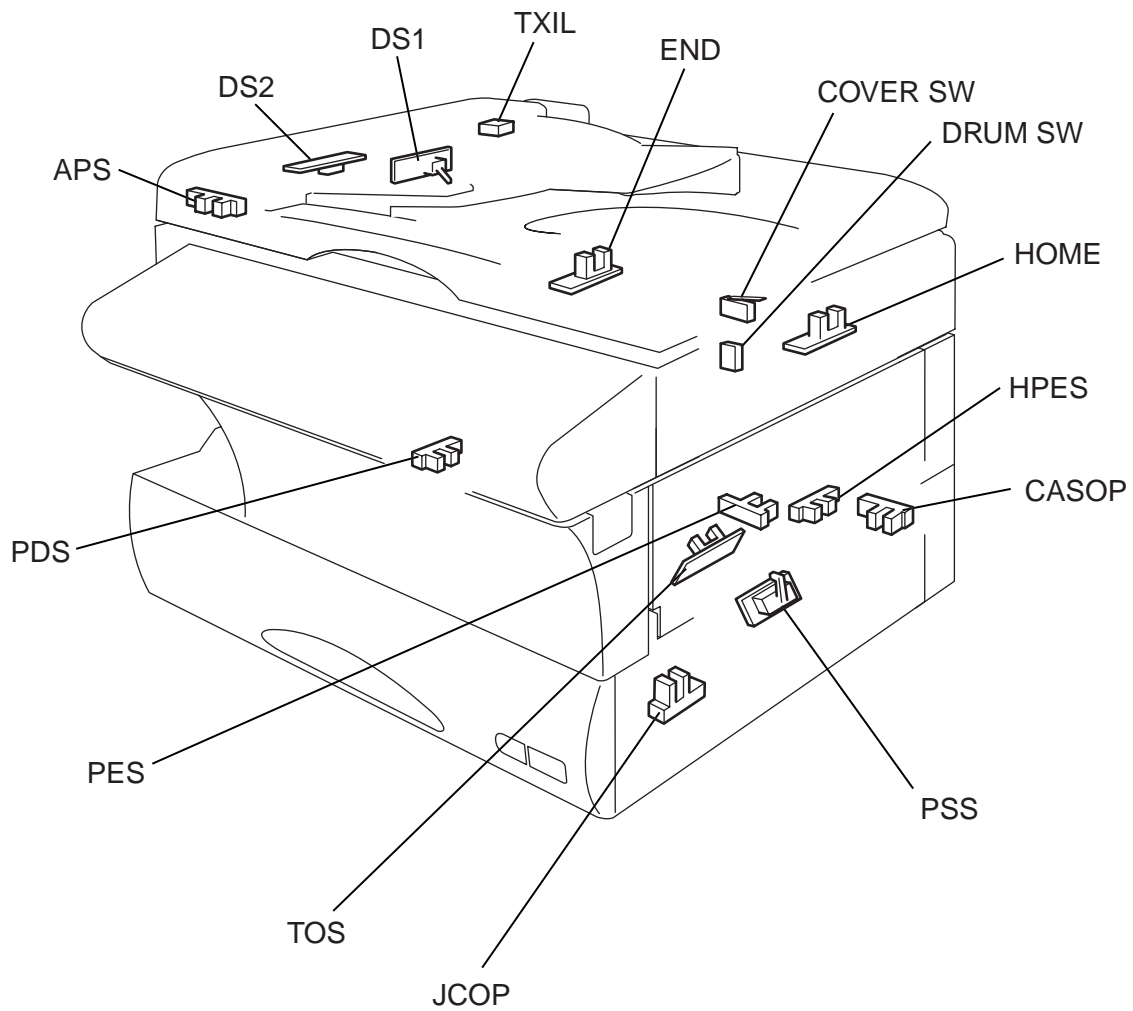

## 2.5.2 Sensor Descriptions

The following table gives a brief description of each sensor and its function.

Code	Name	Detects	Sensor Type
DS1	Document sensor 1	Presence of document in feeder	Photo interrupter
DS2	Document sensor 2	Leading and trailing edge of document	Mechanical Switch
HOME	Mirror carriage home position sensor	Mirror carriage position	Photo interrupter
END	Mirror carriage end position sensor	Mirror carriage position	Photo interrupter
APS	ADF permit sensor	Platen cover quite close or not	Photo interrupter
TXIL (ADF)	Interlock switch (ADF)	Scanner cover open or close	Micro switch
PSS	Paper set sensor	Detects paper feeding out of cassette/tray.	Photo interrupter
PDS	Paper discharge sensor	Detects paper pass at paper exit.	Photo interrupter
PES	Paper empty sensor	Detects presence of recording paper in the 1st paper cassette	Photo interrupter
HPES	Hand paper empty sensor	Detects presence of recording paper in the bypass tray	Photo interrupter
TOS	Toner sensor	Detects the toner empty and toner cartridge set.	Photo interrupter
CASOP	Paper cassette open sensor	Detects the 1st paper cassette open or close	Photo interrupter
JCOP	Jam access cover (side cover) open sensor	Detects the side cover open or close	Photo interrupter
COVER-SW	Cover switch	Detects top cover open or close	Micro switch

## 2.6 Document Scanning Sequence


### 2.6.1 Document Detection

When a document is placed into the document feeder, Document Sensor 1 (DS1) is activated and you will hear the short beep.

### 2.6.2 Document Separation

Document separation is the process that allows a multi-page document to go through the scanner one page at a time. Separation occurs through the action of the separator roller and retard roller.

As shows in the illustrations, documents in the feeder are pressed against the separator roller. The bottom document is separated from the remaining documents by the friction of the retard roller.

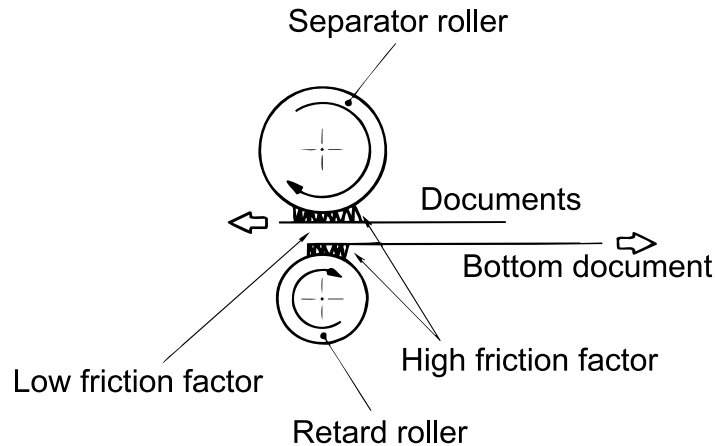

### 2.6.3 Document Transport


Following document separation, the feed roller causes the document to advance. As it advances, the leading edge of the document activates the Document Sensor 2 (DS2) sensor. Once DS2 is activated, the feed roller continues to rotate until the document reaches the scan wait position. The machine uses the distance from DS2 to the scan wait position and the diameter of the feed roller to determine the number of rotations necessary to feed the document to the scan wait position.

### 2.6.4 Document Scanning


When the document reaches the scan wait position, the machine waits for the next command. It will start scanning the document when either the START key is pressed. The light from the scanner lamp strikes the face of the document and is reflected into the lens through mirrors A, B, and C. In case the light intensity along the length of the scanner lamp is not uniform, shading compensation is provided to ensure even illumination.

As the reflected image passes through the lens, it is focused onto the charged coupled device (CCD). The CCD then converts the dark and light areas of the image into electrical impulses, or image data. Circuits on the main control PCB encode the image data and send it to the modem where it is modulated. The modulated signal is then placed onto the telephone line by the NCU.

When DS2 detects the trailing edge of the document, the image signal output is turned off. The scanner continues to remain active for a few more seconds in case there is another document to follow.

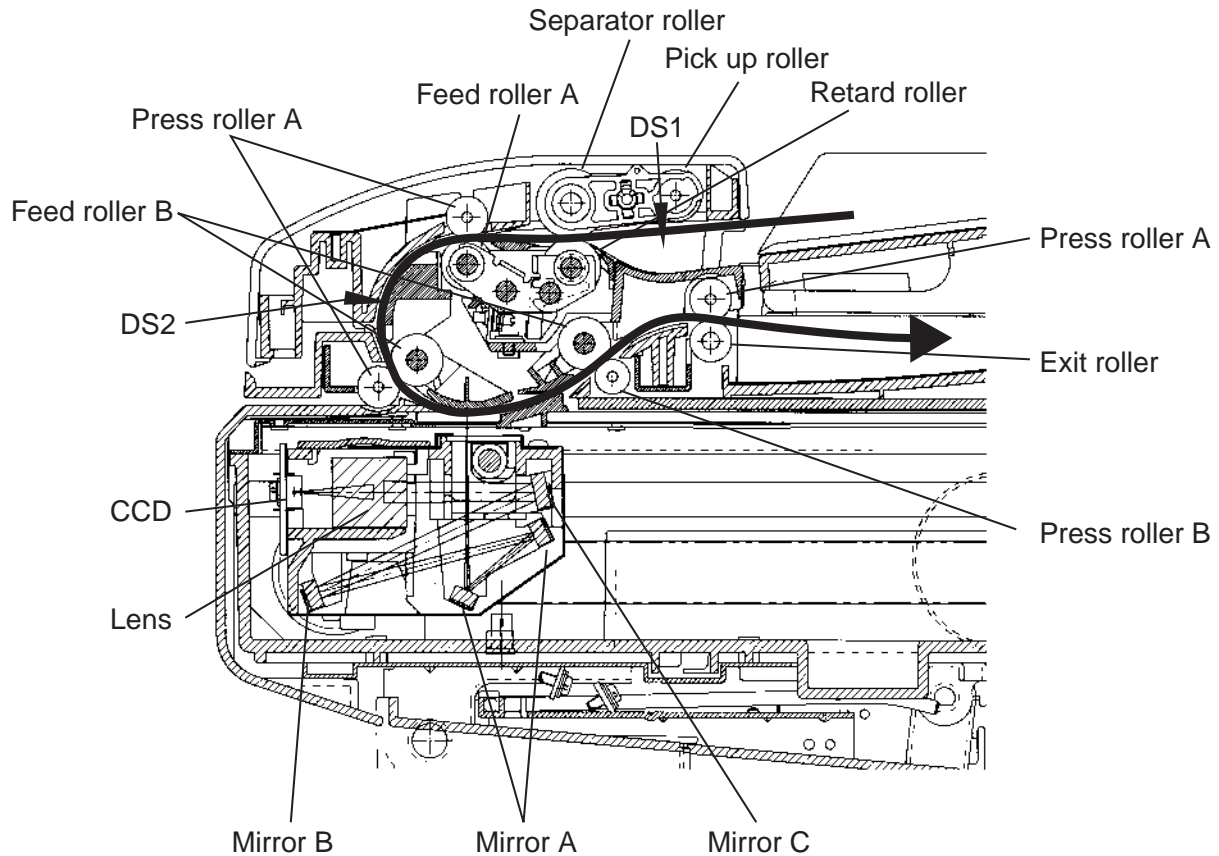

Document scanning in ADF section

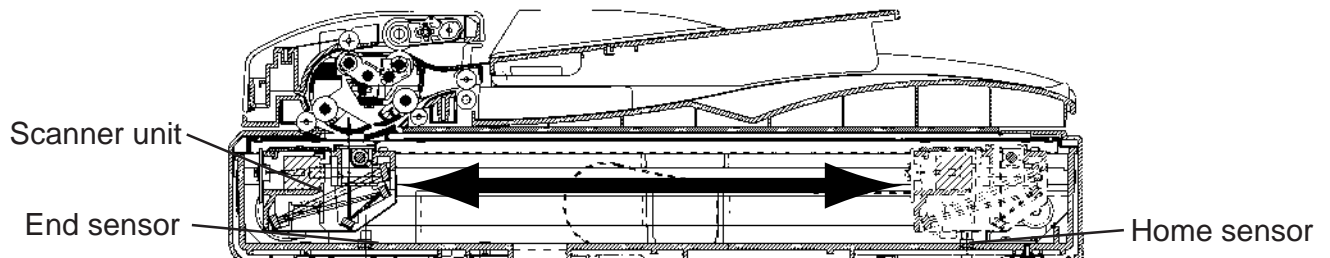

Document scanning in FBS section


## 2.6.5 Document Discharge

The scanned document is discharged through the document exit by the exit roller

## 2.7 Recording Section

### 2.7.1 Recording Paper Feed Path

A sheet of the recording paper is separated from the remaining paper by the friction of the pickup roller. The paper is moved along the paper guide until it reaches the platen roller. It is then fed by the rotation of the platen roller.

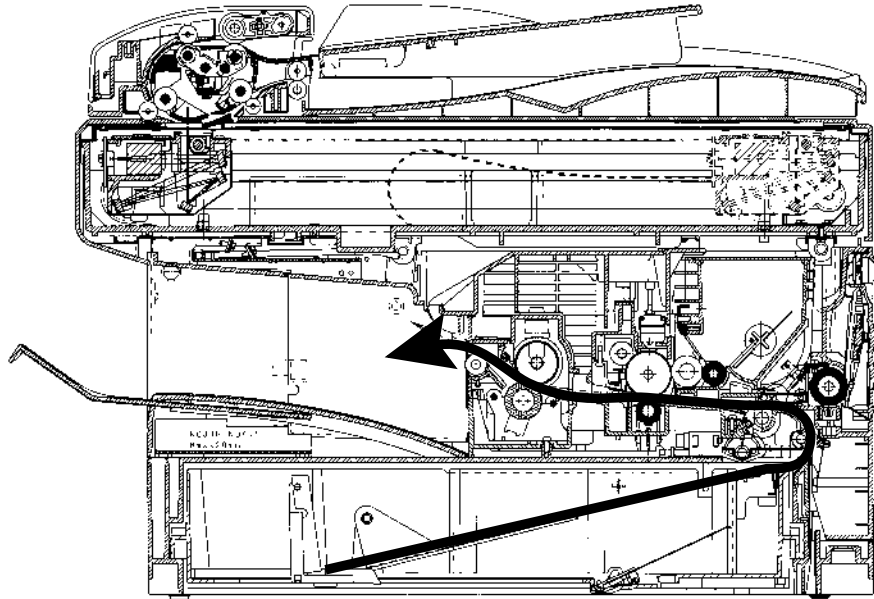


## 2.8 Image Processing

Incoming data is received from the telephone line by the NCU and sent to the main control PCB. The modem, located on the main control PCB, demodulates the data. The data is then sent to the printer for image processing.

The image processing is roughly divided into the following steps:

1. Drum Charging
2. Drum Exposure
3. Development
4. Image transfer
5. Fusing
6. Distributing the toner

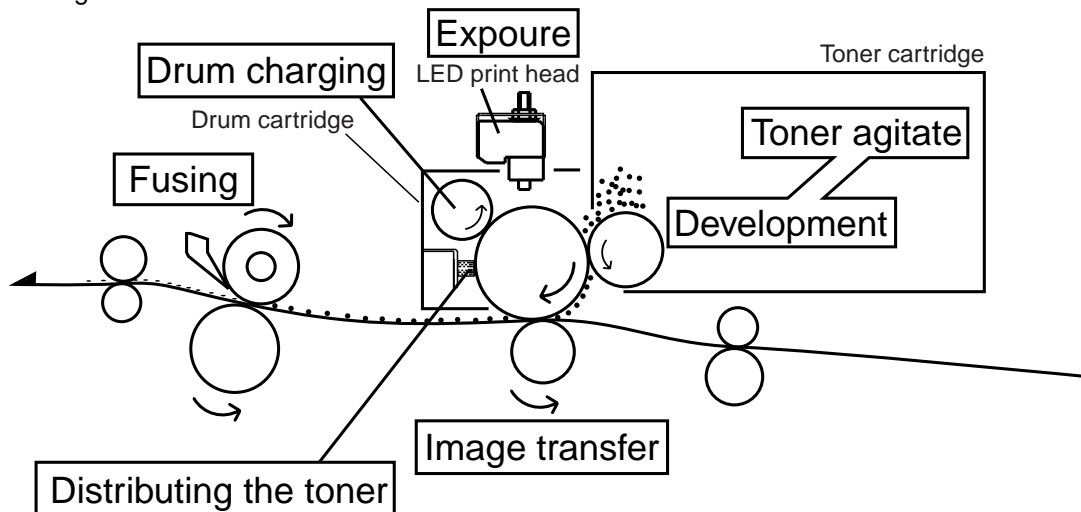

## 2.8.1 Drum Charge

- The Drum is charged with static electricity before LED exposure. The Rotating Charge Brush is used for the charging method.
- The rotating brush charging generate little ozone in the printer. Because the charge is directly given to the Drum, the Drum can be charged by low voltage. At the same time, the Drum can be charged stably and evenly.


## 2.8.2 Drum Exposure

An invisible static image is made by the light from the LED print head.

The LED print head, located inside the printer cover, closes down over the drum and projects light onto the drum surface. When the document is to be printed, individual elements in the LED print head turn on and expose the drum where ever a dark area should appear in the document.

## 2.8.3 Development

Toner is applied to the invisible static image on the Drum and a toner image is created on the surface.

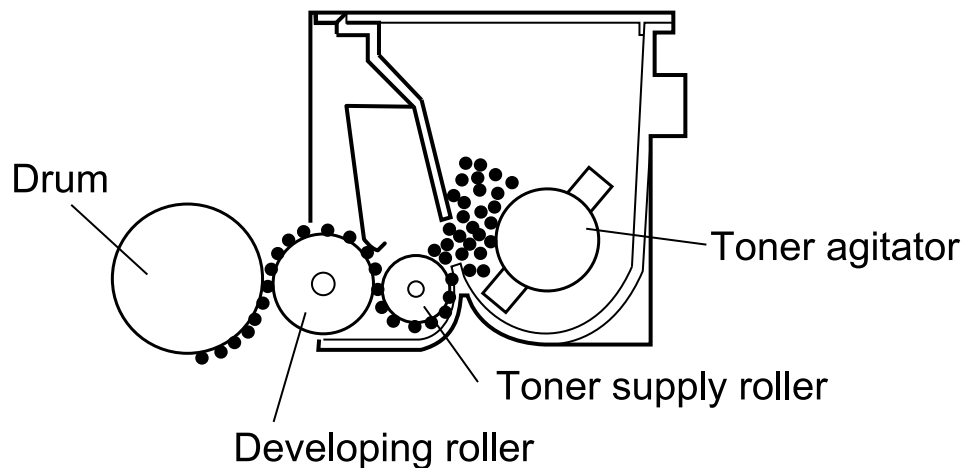


	Part Name	Function
1	Toner Agitator	Contains toner.
2	Toner supply Roller	Transports the toner to the developing roller.
3	Developing Roller	Carries the toner to the Drum surface for development.
4	Drum	Exposed to LED right to create an invisible image and rotates to carry the developed image to the paper surface.




## 2.8.4 Image Transfer

Image transfer is the process of transferring the toner image created on the Drum in the developing process to paper. We use the Roller Image Transfer instead of the Corona Image Transfer, as the image transfer method. In the Roller Image Transfer, there is little generation of ozone due to corona discharge. Also, there is no blur of toner because the paper is always pressed by the Drum and the Image Transfer Roller.

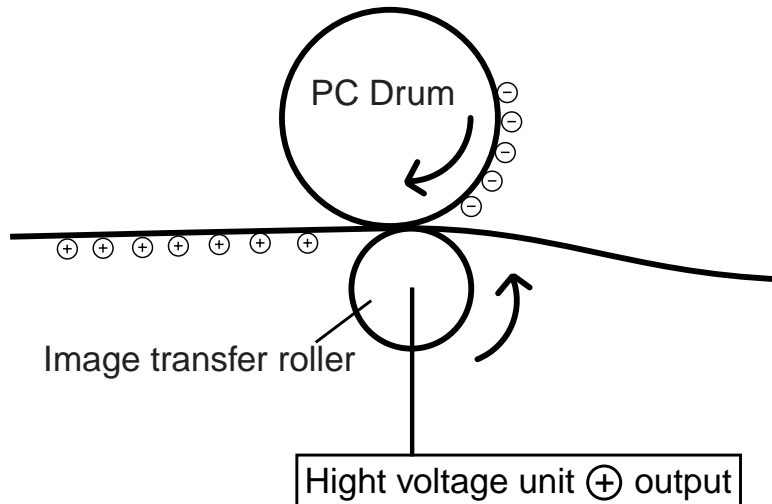

## 2.8.5 Residual toner distribute

The residual toner must be removed from the drum. This step does not actually remove the residual toner from the drum surface. Instead, a "Eraser brush" is used to evenly distribute the remaining toner over the drum surface. When the drum surface is charged in preparation for printing the next document the remaining toner is also charged. Any residual toner that is not exposed in the subsequent drum exposure process is attached back onto the developing roller.

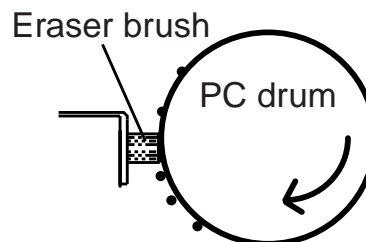

## 2.8.6 Fusing


### An Overview

The toner image transferred on to the paper is securely fixed.

A heat roller system is used as the fusing system. The toner image is fused by Heater Roller heated by the Heater Lamp, and securely fixed by the pressure between the Heater roller and Press rollers.

A Thermistor detects and controls the Heater Roller temperature.


The Thermostat functions when the Heater Lamp is not turned OFF even if the Thermistor detects a high temperature malfunction.

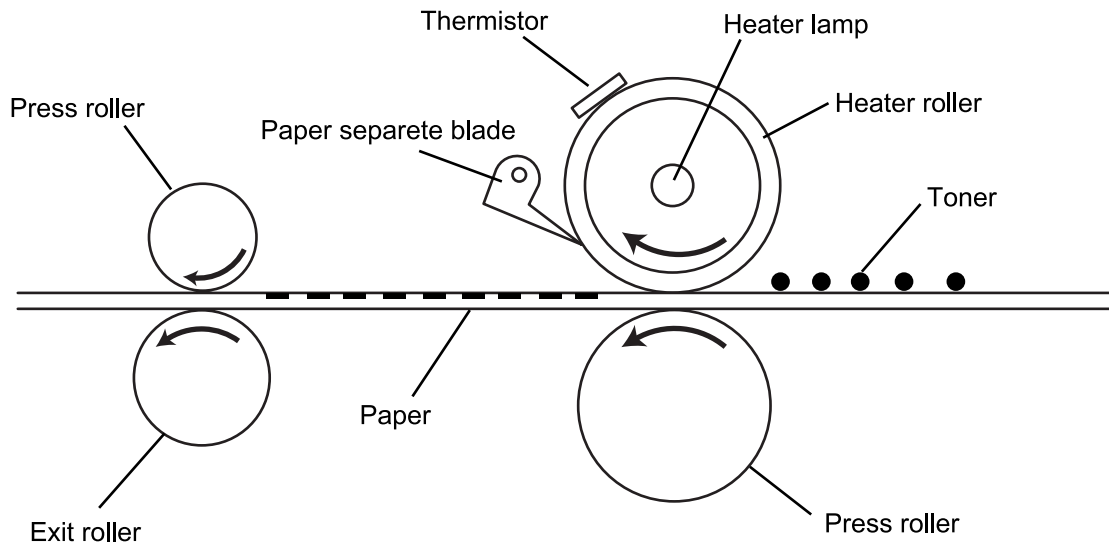

### Fusing Temperature Control Circuit


The Thermistor detects the surface temperature of the Heater Roller and inputs that analog voltage into the Main Control PCB. Corresponding to this data, the Heater Lamp ON/OFF signal is output to the Heater ON/OFF switch of the power supply unit, causing the Heater Lamp to turn ON or OFF to control the fusing temperature.

When the Heater Lamp is not turned OFF even if the Thermistor detects a high temperature malfunction, the thermostat shuts down the power to the heater lamp. When the thermostat is malfunction, the thermal cut-off shuts down the power to the heater lamp.

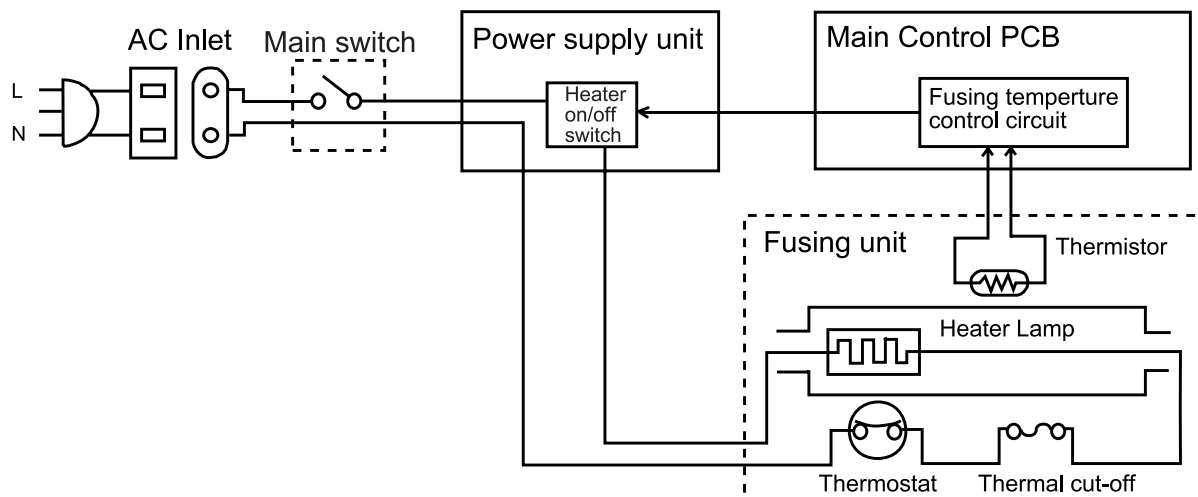

## Fusing temperature

- 1) Warming Up      After the initialization of the printer, warming up of the printer starts and the Heater Lamp turns ON until the temperature of the Heater Roller reaches approx. 185 °C.
- 2) Printing      When the printer obtains the printing command from its controller, the Heater Roller is maintained at 185 °C.  
After printing, the printer turns to standby mode. The fuser kept at low temperature.
- 3) Standby mode      The Heater Roller maintained at approx. 100 °C.
- 4) Sleep mode      In this mode, saving the power.

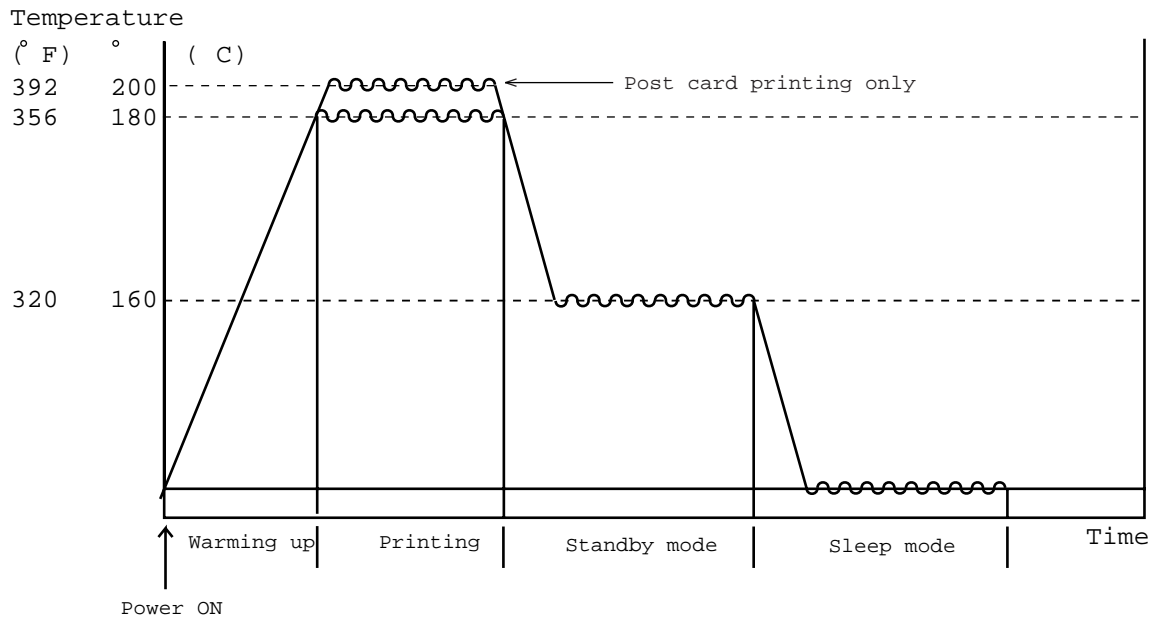

# Section3

## Adjustment Procedures

### 3.1 Field Service Program Modes

The fax machine feature maintenance modes for machine adjustment. Each mode is listed below along with the command used to activate the mode and a brief functional description.

**Note:** When you press “ \* ”, you will hear short beeps. However continue the operation, as it is no problem.

<b>Set or Clear Machine Parameters</b> .....	<b>Program key, *, 0</b>
Used to set or clear machine parameters.	
<b>Set or Clear Memory Switches</b> .....	<b>Program key, *, 1</b>
Used to set or clear memory switches.	
<b>Clear Programmed Data / User Settings</b> .....	<b>Program key, *, 2</b>
Erases user-programmed information (date, time, TTI, autodialer, etc.) and any documents stored in memory.	
<b>All RAM Clear</b> .....	<b>Program key, *, 3</b>
Erases same information as “Clear Programmed Data / User Settings” function along with resetting all of the machine parameters, memory switches and unique switches to factory defaults.	
<b>Set or Clear Unique Switches</b> .....	<b>Program key, *, 4</b>
Used to set or clear Unique switches.	
<b>Printer maintenance mode</b> .....	<b>Program key, *, 6</b>
Access the printer maintenance mode.	
<b>Print Service Report</b> .....	<b>Program key, *, 7</b>
Prints several machine statuses.	
<b>Print Program Mode List</b> .....	<b>Program key, *, 8</b>
Prints a list of the unit's programming modes.	
<b>Test Modes</b> .....	<b>Program key, *, 9</b>
Allows the technician to perform a series of diagnostic tests.	
<b>Print Machine Parameters, Memory Switches and Unique Switches List</b> .....	<b>Program key, *, A (01)</b>
Prints a list of the machine switch settings showing the default settings and current settings.	
<b>Factory Functions</b> .....	<b>Program key, *, B (02)</b>
Allows the technician to perform a series of diagnostic tests.	
<b>Telephone Circuit Test Modes</b> .....	<b>Program key, *, C (03)</b>
Allows the technician to perform a series of diagnostic tests.	
<b>Mirror Carriage Transfer Mode</b> .....	<b>Program key, *, E (05)</b>
Perform it before installing the fax machine.	
<b>Set or clear the consumable order sheet</b> .....	<b>Program key, *, F (06)</b>
Used to set or clear the consumable order sheet.	
<b>DRAM Clear</b> .....	<b>Program key, *, G (07)</b>
Used to clear a DRAM.	
<b>Clear Life Monitor</b> .....	<b>Program key, *, H (08)</b>
Used to clear a Life monitor keeps a count of the pages scanned, etc.	
<b>Clear option module's SRAM</b> .....	<b>Program key, *, I (09)</b>
Used to clear a SRAM of option module.	
<b>Set Service Code</b> .....	<b>Program key, *, J (10)</b>
Used to protect to clear a Life monitor.	
<b>Life Monitor Maintenance</b> .....	<b>Program key, *, K (11)</b>
Used to protect to clear a Life monitor.	



## 3.2 Machine Parameter Adjustment

### 3.2.1 Setting the Machine Parameters

These switches are used to program internal machine parameters. The primary back up battery maintains these settings if power is lost.

1. From standby, press **Program key**, \*, 0.

Set Parameters

◀/▶/Enter

2. Press **ENTER**.

A0:           00000000

◀/▶/Enter

3. Select the desired parameter by pressing a one-touch key plus a number on the keypad. For example, to access parameter B:1, press one-touch “B” plus the number “1” on the numeric keypad.

B1:           00011010

◀/▶/Enter

4. Press **ENTER**.

Set Parameters

B1            00011010

Bit No.   76543210

(The bits are numbered 7 through 0 –bit 7 is left most.)

5. To navigate through the machine parameter settings:

- Press ◀ key to move the cursor to the left.
- Press ▶ to move the cursor to the right.
- Press the 0 or 1 on the numeric keypad to change the bit value.
- Press **ENTER** to save the setting of the displayed parameter and advance to the next parameter.

(Continue pressing **ENTER** until the desired parameter is shown in the display. Be sure to press **ENTER** after each parameter is programmed to save the new setting.)

- Press **STOP** to return the unit to standby.

**Note:** You can confirm the initial setting of each Machine parameter by the Machine Parameters List. The Machine Parameters List will be printed by pressing **Program key**, \*, A(01).

### 3.2.2 Clearing the Machine Parameters

Resets the machine parameters to factory defaults.

1. From standby, press **Program key**, \*, 0, ▶.

Clear Parameters

◀/▶/Enter

2. Press **ENTER**.

Clear Parameters

Check Enter/Cancel

3. Press **ENTER**. The machine parameters will reset to factory defaults.

**Note:** To finish the operation without clearing the parameters, press **CANCEL**.

## Machine Parameter A:0

Switch	Initial Setting	Adjust	Usage/Comments
7	0	Country code	The country code enables the ROM to output the correct programming information for the respective country.
6	0		
5	0		
4	0		
3	0		
2	0		
1	0		
0	0		

## Machine Parameter A:1

Switch	Initial Setting	Adjust	Usage/Comments
7	0	Non-loaded cable compensation (TX)	0: 0: 1: 1: 0 db 4 db 8 db 12 db
6	1		0: 1: 0: 1:
5	0	Non-loaded cable compensation (RX)	0: 0: 1: 1: 0 db 4 db 8 db 12 db
4	1		0: 1: 0: 1:
3	*	Output attenuation	See table below <b>Note:</b> The setting of this switch is available only when setting other than 0 dB and this setting is used instead of Memory Switch B:1, bit 3-0.
2	*		
1	*		
0	*		

### Machine Parameter A:1...Output attenuation

Switch	-15 dB	-14 dB	-13 dB	-12 dB	-11 dB	-10 dB	-9 dB	-8 dB	-7 dB	-6 dB	-5 dB	-4 dB	-3 dB	-2 dB	-1 dB	-0 dB
3	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
2	1	1	1	1	0	0	0	0	1	1	1	1	0	0	0	0
1	1	1	0	0	1	1	0	0	1	1	0	0	1	1	0	0
0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0

## Machine Parameter A:2

Switch	Initial Setting	Adjust	Usage/Comments
7	1	Factory use only	
6	0	Factory use only	
5	1	Factory use only	
4	0	Factory use only	
3	0	DTMF output level attenuation	See table below.
2	0		
1	0		
0	1		

Machine Parameter A:2 ... DTMF output level attenuation — (Factory default is -1 dB)

Switch 3	Switch 2	Switch 1	Switch 0	Attenuation
0	0	0	0	0 dB
0	0	0	1	1 dB
0	0	1	0	2 dB
0	0	1	1	3 dB
0	1	0	0	4 dB
0	1	0	1	5 dB
0	1	1	0	6 dB
0	1	1	1	7 dB
1	0	0	0	8 dB
1	0	0	1	9 dB
1	0	1	0	10 dB
1	0	1	1	11 dB
1	1	0	0	12 dB
1	1	0	1	13 dB
1	1	1	0	14 dB
1	1	1	1	15 dB



### Machine Parameter A:3

Switch	Initial Setting	Adjust	Usage/Comments	
7	0	Leading edge document margin adjustment (ADF)	Switch 76543210	Settings
6	0			
5	1		00000000	0.00 mm
4	1		00000001	0.85 mm
3	0			
2	1		00101111	39.95 mm
1	0		00110000	40.80 mm
0	0		00110001	41.65 mm
		Adjusts the leading edge margin from Document Sensor 2 (DS2) to the start of the scanning position.  Each setting changes by 0.85mm.  <b>Note:</b> These values are factory set and should not be adjusted unless instructed by a Muratec technical representative.	00110010	42.50 mm
			00110011	43.35 mm
			00110100	44.20 mm ← Initial setting
			00110101	45.05 mm
			00110110	45.90 mm
			00110111	46.75 mm
			00111000	47.60 mm
			00111001	48.45 mm
			11111111	216.75 mm

### Machine Parameter A:4

Switch	Initial Setting	Adjust	Usage/Comments	
7	0	Trailing edge document margin adjustment. (ADF)	Switch 76543210	Settings
6	0			
5	1		00000000	0.00 mm
4	0		00000001	0.85 mm
3	0			
2	1		00100000	27.20 mm
1	0		00100001	28.05 mm
0	1		00100010	28.90 mm
		Adjusts the document feed after the trailing edge of a document passes Document Sensor 2 (DS2).  Each setting changes by 0.85mm.  <b>Note:</b> These values are factory set and should not be adjusted unless instructed by a Muratec technical representative.	00100011	29.75 mm
			00100100	30.60 mm
			00100101	31.45 mm ← Initial setting
			00100110	32.30 mm
			00100111	33.15 mm
			00101000	34.00 mm
			00101001	34.85 mm
			00101010	35.70 mm
			11111111	216.75 mm

### Machine Parameter A:5 and A:6 — Factory use only

## Machine Parameter A:7

Switch	Initial Setting	Adjust	Usage/Comments
7	0	DRAM capacity indication (This switch can indicate 8 to 64 MB memory capacity)	This switch indicates the DRAM capacity. This switch is read only, do not set any character.  You can see the memory capacity by how many "1" is indicated on the LCD. For example, if the two "1" is indicated, i.e. "00000011", the DRAM capacity is 16MB. Similarly, "00001111" means 32MB capacity.
6	0		
5	0		
4	0		
3	0		
2	0		
1	0		
0	1		

## Machine Parameter A:8 and A:9 – Factory use only

### Machine Parameter B:0

Switch	Initial Setting	Adjust	Usage/Comments
7	0	Leading edge document margin adjustment (FBS)	<div>Switch 76543210    Settings</div> <div>00000000    0.00 mm</div> <div>00000001    0.85 mm</div> <div>00000111    5.95 mm</div> <div>00001000    6.80 mm</div> <div>00001001    7.65 mm</div> <div>00001010    8.50 mm</div> <div>00001011    9.35 mm</div> <div>00001100    10.20 mm ← Initial setting</div> <div>00001101    11.05 mm</div> <div>00001110    11.90 mm</div> <div>00001111    12.75 mm</div> <div>00010000    13.60 mm</div> <div>00010001    14.45 mm</div> <div>11111111    216.75 mm</div>
6	0		
5	0		
4	0		
3	1		
2	1		
1	0		
0	0	Adjusts the leading edge margin from standby position of the mirror carriage to the start of the scanning position.  Each setting changes by 0.85mm.  <b>Note:</b> These values are factory set and should not be adjusted unless instructed by a Muratec technical representative.	

## Machine Parameter B:1

Switch	Initial Setting	Adjust	Usage/Comments
7	0	Leading edge document margin adjustment (ADF)	Switch 76543210    Settings
6	1		
5	0		
4	0		
3	0		
2	0		
1	0		
0	1		
		Adjusts the leading edge margin from the mirror carriage passes End Sensor to the start of the scanning position.	
		Each setting changes by 0.85mm.	
		<b>Note:</b> These values are factory set and should not be adjusted unless instructed by a Muratec technical representative.	
			00000000    0.00 mm
			00000001    0.85 mm
			00111100    51.00 mm
			00111101    51.85 mm
			00111110    52.70 mm
			00111111    53.55 mm
			01000000    54.40 mm
			<u>01000001    55.25 mm</u> ← Initial setting
			01000010    56.10 mm
			01000011    56.95 mm
			01000100    57.80 mm
			01000101    58.65 mm
			01000111    59.50 mm
			11111111    216.75 mm

## Machine Parameter B:2

Switch	Initial Setting	Adjust	Usage/Comments
7	0	ADF scanner registration adjustment (Horizontal)	Switch 76543210    Settings
6	0		
5	0		
4	0		
3	0		
2	0		
1	0		
0	0		
		Adjusts the start point to scan the document.	
		The plus setting increase the left margin and the minus setting decrease it.	
		Each setting changes by 0.5 mm.	
			00000111    3.5 mm    Maximum
			00000110    3.0 mm
			00000101    2.5 mm
			00000100    2.0 mm
			00000011    1.5 mm
			00000010    1.0 mm
			00000001    0.5 mm
			<u>00000000    Initial setting</u>
			10000001    -0.5 mm
			10000010    -1.0 mm
			10000011    -1.5 mm
			10000100    -2.0 mm
			10000101    -2.5 mm
			10000110    -3.0 mm
			10000111    -3.5 mm    Minimum

### Machine Parameter B:3

Switch	Initial Setting	Adjust	Usage/Comments
7	0	FBS scanner registration adjustment (Horizontal)	Switch 76543210      Settings
6	0		
5	0		
4	0		
3	0		
2	0		
1	1		
0	0		
		Adjusts the start point to scan the document.	00000111      3.5 mm      Maximum
		The plus setting increase the left margin and the minus setting decrease it.	00000110      3.0 mm
			00000101      2.5 mm
			00000100      2.0 mm
			00000011      1.5 mm
			00000010      1.0 mm      ← Initial setting
			00000001      0.5 mm
			00000000      0 mm
			10000001      -0.5 mm
			10000010      -1.0 mm
			10000011      -1.5 mm
		Each setting changes by 0.5 mm.	10000100      -2.0 mm
			10000101      -2.5 mm
			10000110      -3.0 mm
			10000111      -3.5 mm      Minimum

### Machine Parameter B:4

Switch	Initial Setting	Adjust	Usage/Comments
7	0	ADF scanner registration adjustment (Horizontal)	Switch 7654
6	0		
5	0		
4	0		
3	0		
2	0		
1	0		
0	0		
		Adjusts the horizontal scanning range.	Max. 0011      4.2 mm
		The plus setting increase the scanning range and the minus setting decrease it.	0010      2.8 mm
			0001      1.4 mm
			0000      Initial setting
			1001      -1.4 mm
			1010      -2.8 mm
			Min. 1011      -4.2 mm
		If your machine is MFX-1200, each setting changes by 1.4 mm.	
		<b>Note:</b> Switch 0 – 3 are not available for MFX-1200.	

## Machine Parameter B:5

Switch	Initial Setting	Adjust	Usage/Comments
7	0	FBS scanner registration adjustment (Horizontal)	Switch 7654  Max. 0011 4.2 mm 0010 2.8 mm 0001 1.4 mm <u>0000</u> Initial setting 1001 -1.4 mm 1010 -2.8 mm Min. 1011 -4.2 mm
6	0		
5	0		
4	0		
3	0		
2	0		
1	0		
0	0		
		Adjusts the horizontal scanning range. The plus setting increase the scanning range and the minus setting decrease it.  If your machine is MFX-1200, each setting changes by 1.4 mm.  <b>Note:</b> Switch 0 – 3 are not available for MFX-1200.	

## Machine Parameter B:6

Switch	Initial Setting	Adjust	Usage/Comments
7	0	FBS scanner registration adjustment (Vertical)	Switch 76543210      Settings  01111111      255.0 mm    Maximum : 00000110      6.0 mm 00000101      5.0 mm 00000100      4.0 mm 00000011      3.0 mm 00000010      2.0 mm 00000001      1.0 mm <u>00000000</u> Initial setting 10000001      -1.0 mm 10000010      -2.0 mm 10000011      -3.0 mm 10000100      -4.0 mm 10000101      -5.0 mm 10000110      -6.0 mm : 11111111      -255.0 mm    Minimum
6	0		
5	0		
4	0		
3	0		
2	0		
1	0		
0	0		
		Adjusts the end point to scan the document. The plus setting increase the scanning range and the minus setting decrease it.  Each setting changes by 1 mm.	

## Machine Parameter B:7

Switch	Initial Setting	Adjust	Usage/Comments	
7	0	Leading edge document margin adjustment (ADF)	Switch 76543210	Settings
6	0			
5	0			
4	0			
3	0			
2	0			
1	0			
0	0			
		Adjusts the leading edge margin from Document Sensor 2 (DS2) to the start of the scanning position.		
		Each setting changes by 0.085mm.		
		<b>Note:</b> These values are factory set and should not be adjusted unless instructed by a Muratec technical representative.		
			11111111	-10.80 mm
			10000011	-0.26 mm
			10000010	-0.17 mm
			10000001	-0.085 mm
			00000000	0.00 mm
			00000001	0.085 mm
			00000010	0.17 mm
			00000011	0.26 mm
			00000100	0.34 mm
			00000101	0.43
			00000111	0.51 mm
			01111111	10.80 mm

## Machine Parameter B:8

Switch	Initial Setting	Adjust	Usage/Comments	
7	0	Trailing edge document margin adjustment. (ADF)	Switch 76543210	Settings
6	0			
5	0			
4	0			
3	0			
2	0			
1	0			
0	0			
		Adjusts the document feed after the trailing edge of a document passes Document Sensor 2 (DS2).		
		Each setting changes by 0.085mm.		
		<b>Note:</b> These values are factory set and should not be adjusted unless instructed by a Muratec technical representative.		
			11111111	-10.80 mm
			10000011	-0.26 mm
			10000010	-0.17 mm
			10000001	-0.085 mm
			00000000	0.00 mm
			00000001	0.085 mm
			00000010	0.17 mm
			00000011	0.26 mm
			00000100	0.34 mm
			00000101	0.43
			00000111	0.51 mm
			01111111	10.80 mm

## Machine Parameter B:9 ~ C:9 – Factory use only

### Machine Parameter D:0

Switch	Initial Setting	Adjust	Usage/Comments
7	0	Slice level adjustment of "Light" in the mode without Grayscale.	Switch 76543210 00000000 Darkest setting 00000001 00000010 Initial setting 00000011 00000100 Lightest setting
6	0		
5	0		
4	0		
3	0		
2	0		
1	1		
0	0		

### Machine Parameter D:1

Switch	Initial Setting	Adjust	Usage/Comments
7	0	Slice level adjustment of "Lighter" in the mode without Grayscale.	Switch 76543210 00000000 Darkest setting 00000001 00000010 Initial setting 00000011 00000100 Lightest setting
6	0		
5	0		
4	0		
3	0		
2	0		
1	1		
0	0		

### Machine Parameter D:2

Switch	Initial Setting	Adjust	Usage/Comments
7	0	Slice level adjustment of "Normal" in the mode without Grayscale.	Switch 76543210 00000000 Darkest setting 00000001 00000010 Initial setting 00000011 00000100 Lightest setting
6	0		
5	0		
4	0		
3	0		
2	0		
1	1		
0	0		

### Machine Parameter D:3

Switch	Initial Setting	Adjust	Usage/Comments
7	0	Slice level adjustment of "Darker" in the mode without Grayscale.	Switch 76543210 00000000 Darkest setting 00000001 00000010 Initial setting 00000011 00000100 Lightest setting
6	0		
5	0		
4	0		
3	0		
2	0		
1	1		
0	0		

### Machine Parameter D:4

Switch	Initial Setting	Adjust	Usage/Comments
7	0	Slice level adjustment of "Dark" in the mode without Grayscale.	Switch 76543210 00000000 Darkest setting 00000001 00000010 Initial setting 00000011 00000100 Lightest setting
6	0		
5	0		
4	0		
3	0		
2	0		
1	1		
0	0		

### Machine Parameter D:5

Switch	Initial Setting	Adjust	Usage/Comments
7	0	Slice level adjustment of "Light" in Grayscale.	Switch 76543210 00000000 Darkest setting 00000001 00000010 Initial setting 00000011 00000100 Lightest setting
6	0		
5	0		
4	0		
3	0		
2	0		
1	1		
0	0		

### Machine Parameter D:6

Switch	Initial Setting	Adjust	Usage/Comments
7	0	Slice level adjustment of "Lighter" in Grayscale.	Switch 76543210 00000000 Darkest setting 00000001 00000010 Initial setting 00000011 00000100 Lightest setting
6	0		
5	0		
4	0		
3	0		
2	0		
1	1		
0	0		

### Machine Parameter D:7

Switch	Initial Setting	Adjust	Usage/Comments
7	0	Slice level adjustment of "Normal" in Grayscale.	Switch 76543210 00000000 Darkest setting 00000001 00000010 Initial setting 00000011 00000100 Lightest setting
6	0		
5	0		
4	0		
3	0		
2	0		
1	1		
0	0		



## Machine Parameter D:8

Switch	Initial Setting	Adjust	Usage/Comments
7	0	Slice level adjustment of "Darker" in Grayscale.	Switch 76543210 00000000 Darkest setting 00000001 00000010 Initial setting 00000011 00000100 Lightest setting
6	0		
5	0		
4	0		
3	0		
2	0		
1	1		
0	0		

## Machine Parameter D:9

Switch	Initial Setting	Adjust	Usage/Comments
7	0	Slice level adjustment of "Dark" in Grayscale.	Switch 76543210 00000000 Darkest setting 00000001 00000010 Initial setting 00000011 00000100 Lightest setting
6	0		
5	0		
4	0		
3	0		
2	0		
1	1		
0	0		

## Machine Parameter E:0 ~ E:9 — Factory use only

## Machine Parameter F:0

Switch	Initial Setting	Adjust	Usage/Comments
7	0	Adjustment of the scanning stretching and squeezing for ADF and FBS. (Horizontal)  The plus setting stretch the image data and the minus setting squeeze it. Each setting changes by 0.1%	Switch 76543210 Settings 01111111 12.7 % Maximum : 00100000 3.2 % : 00011000 2.4 % : 00010000 1.6 % : 00001000 0.8 % : <u>00000000 Initial setting</u> : 10001000 -0.8 % : 10010000 -1.6 % : 10011000 -2.4 % : 10100000 -3.2 % : 10111000 -12.7 % Minimum
6	0		
5	0		
4	0		
3	0		
2	0		
1	0		
0	0		

## Machine Parameter F:1

Switch	Initial Setting	Adjust	Usage/Comments	
7	0	Adjustment of the scanning stretching and squeezing for ADF. (Vertical)	Switch 76543210	Settings
6	0		01111111	12.7 % Maximum
5	0		:	
4	0		00100000	3.2 %
3	0		:	
2	0		00011000	2.4 %
1	0		:	
0	0		00010000	1.6 %
		The plus setting stretch the image data and the minus setting squeeze it. Each setting changes by 0.1%	:	
			00001000	0.8 %
			:	
			<u>00000000</u>	<u>Initial setting</u>
			:	
			10001000	-0.8 %
			:	
			10010000	-1.6 %
			:	
			10011000	-2.4 %
			:	
			10100000	-3.2 %
			:	
			10111000	-12.7 % Minimum

## Machine Parameter F:2

Switch	Initial Setting	Adjust	Usage/Comments	
7	0	Adjustment of the scanning stretching and squeezing for FBS. (Vertical)	Switch 76543210	Settings
6	0		01111111	12.7 % Maximum
5	0		:	
4	0		00100000	3.2 %
3	0		:	
2	0		00011000	2.4 %
1	0		:	
0	0		00010000	1.6 %
		The plus setting stretch the image data and the minus setting squeeze it. Each setting changes by 0.1%	:	
			00001000	0.8 %
			:	
			<u>00000000</u>	<u>Initial setting</u>
			:	
			10001000	-0.8 %
			:	
			10010000	-1.6 %
			:	
			10011000	-2.4 %
			:	
			10100000	-3.2 %
			:	
			10111000	-12.7 % Minimum

### Machine Parameter F:3

Switch	Initial Setting	Adjust	Usage/Comments		
7	0	ADF scanner registration adjustment (Horizontal)	Switch 76543210	Settings	
6	0				
5	0				
4	0				
3	0	Adjusts the start point to scan the document.		01111111	63.5 mm Maximum
2	0			:	
1	0			00000011	1.5 mm
0	0			00000010	1.0 mm
		The plus setting decrease the left margin and the minus setting increase it.		00000001	0.5 mm
				00000000	Initial setting
				10000001	-0.5 mm
				10000010	-1.0 mm
		Each setting changes by 0.5 mm.		10000011	-1.5 mm
				:	
				11111111	-63.5 mm Minimum

### Machine Parameter F:4

Switch	Initial Setting	Adjust	Usage/Comments		
7	0	FBS scanner registration adjustment (Horizontal)	Switch 76543210	Settings	
6	0				
5	0				
4	0				
3	0	Adjusts the start point to scan the document.		01111111	63.5 mm Maximum
2	0			:	
1	0			00000011	1.5 mm
0	0			00000010	1.0 mm
		The plus setting decrease the left margin and the minus setting increase it.		00000001	0.5 mm
				00000000	Initial setting
				10000001	-0.5 mm
				10000010	-1.0 mm
		Each setting changes by 0.5 mm.		10000011	-1.5 mm
				:	
				11111111	-63.5 mm Minimum

### Machine Parameter F:5 ~ I:9 – Factory use only

### Machine Parameter J:0

Switch	Initial Setting	Adjust	Usage/Comments		
7	0	Printer registration adjustment (Vertical) at the cassette.	Switch 76543210	Settings	
6	0				
5	0				
4	0				
3	0	Adjusts the start point to print.		00000011	0.13 mm
2	0			00000010	0.08 mm
1	0			00000001	0.042 mm
0	0			00000000	Initial setting
		The plus setting increase the top margin and the minus setting decrease it.		10000001	-0.042 mm
				10000010	-0.08 mm
				10000011	-0.13 mm
				:	
		Each setting changes by 0.042 mm		11111111	-5.3 mm Minimum

## Machine Parameter J:1

Switch	Initial Setting	Adjust	Usage/Comments		
7	0	Printer registration adjustment (Vertical) at the bypass tray.	Switch 76543210 01111111	Settings 5.3 mm	Maximum
6	0				
5	0				
4	0				
3	0	Adjusts the start point to print.	00000011	0.13 mm	
2	0		00000010	0.08 mm	
1	0	The plus setting increase the top margin and the minus setting decrease it.	00000001	0.042 mm	
0	0		<u>00000000</u>	<u>Initial setting</u>	
			10000001	-0.042 mm	
			10000010	-0.08 mm	
		Each setting changes by 0.042 mm	10000011	-0.13 mm	
			11111111	-5.3 mm	Minimum

## Machine Parameter J:2

Switch	Initial Setting	Adjust	Usage/Comments		
7	1	Printer registration adjustment (Horizontal) at the first cassette.	Switch 76543210 00001000	Settings 4.0 mm	Maximum
6	0				
5	0				
4	0				
3	0	Adjusts the start point to print.	00000010	1.0 mm	
2	1		00000001	0.5 mm	
1	0	The plus setting increase the left margin and the minus setting decrease it.	00000000	0.0 mm	
0	0		10000001	-0.5 mm	
			10000010	-1.0 mm	
			10000011	-1.5 mm	
		Each setting changes by 0.5 mm	<u>10000100</u>	<u>-2.0 mm</u>	Initial setting
			10000101	-2.5 mm	
			10000110	-3.0 mm	
			10000111	-3.5 mm	
			10001000	-4.0 mm	
					Minimum

### Machine Parameter J:3

Switch	Initial Setting	Adjust	Usage/Comments		
7	1	Printer registration adjustment (Horizontal) at the optional second cassette.	Switch 76543210	Settings	
6	0		00001000	4.0 mm	Maximum
5	0				
4	0				
3	0	Adjusts the start point to print.	00000010	1.0 mm	
2	1	The plus setting increase the left margin and the minus setting decrease it.	00000001	0.5 mm	
1	0		00000000	0.0 mm	
0	0		10000001	-0.5 mm	
			10000010	-1.0 mm	
			10000011	-1.5 mm	
			10000100	-2.0 mm	Initial setting
			10000101	-2.5 mm	
			10000110	-3.0 mm	
		Each setting changes by 0.5 mm	10000111	-3.5 mm	
			10001000	-4.0 mm	Minimum

### Machine Parameter J:4

Switch	Initial Setting	Adjust	Usage/Comments		
7	1	Printer registration adjustment (Horizontal) at the bypass tray	Switch 76543210	Settings	
6	0		00001000	4.0 mm	Maximum
5	0				
4	0				
3	0	Adjusts the start point to print.	00000100	2.0 mm	
2	0	The plus setting increase the left margin and the minus setting decrease it.	00000011	1.5 mm	
1	0		00000010	1.0 mm	
0	1		00000001	0.5 mm	
			00000000	0.0 mm	
			10000001	-0.5 mm	Initial setting
			10000010	-1.0 mm	
			10000011	-1.5 mm	
			10000100	-2.0 mm	
		Each setting changes by 0.5 mm			
			10001000	-4.0 mm	Minimum

### Machine Parameter J:5 ~ J:9 — Factory use only

## 3.3 Memory Switch Adjustment

### 3.3.1 Setting the Memory Switches

These switches are used to program internal machine parameters. The primary back up battery maintains these settings if power is lost.

1. From standby, press **Program key**, \*, 1.

```
Set Memory Switch
  ◀/▶/Enter
```

2. Press **ENTER**.

```
A0:      00000110
  ◀/▶/Enter
```

3. Select the desired memory switch by pressing a one-touch key plus a number on the keypad. For example, to access memory switch B:1, press one-touch “B” plus the number “1” on the numeric keypad.

```
B1:      01001001
  ◀/▶/Enter
```

4. Press **ENTER**.

```
Set Memory Switch
B1      01001001
Bit No. 76543210
```

(The bits are numbered 7 through 0 –bit 7 is left most.)

5. To navigate through the memory switch settings:

- Press ◀ key to move the cursor to the left.
- Press ▶ to move the cursor to the right.
- Press the 0 or 1 on the numeric keypad to change the bit value.
- Press **ENTER** to save the setting of the displayed memory switch and advance to the next memory switch.

(Continue pressing **ENTER** until the desired memory switch is shown in the display. Be sure to press **ENTER** after each memory switch is programmed to save the new setting.)

- Press **STOP** to return the unit to standby.

**Note:** You can confirm the initial setting of each Memory Switch by the Memory Switches List. The Memory Switches List will be printed by pressing **Program key**, \*, A(01).

### 3.3.2 Clearing the Memory Switches

Resets the memory switches to factory defaults.

1. From standby, press **Program key**, \*, 1, ▶.

```
Clear Memory Switch
  ◀/▶/Enter
```

2. Press **ENTER**.

```
Clear Memory Switch
Check Enter/Cancel
```

3. Press **ENTER**. The memory switches will reset to factory defaults.

**Note:** To finish the operation without clearing the memory switches, press **CANCEL**.

## Memory Switch A:0 - Dialer

Switch	Initial Setting	Adjust	Usage/Comments
7	0	Factory use only	
6	0	Factory use only	
5	0	Factory use only	
4	0	Factory use only	
3	0	DIS detect time after dialing 0: 80 sec 1: 70 sec	Sets the time DIS signal is detected after dialing a number.
2	1	Factory use only	
1	1	Dial tone detection 0: Do not dial 1: Dial	Determines if the unit proceeds with dialing or indicates an error if no dial tone is detected within five seconds of going off-hook.
0	0	Phone line type 0: PSTN 1: PBX	When set to PSTN, the unit checks for dial tone and acts according to the setting of memory switch A:0, bit 1. When set to PBX, the unit always dials a given number of seconds after going off-hook. Memory switch A:1 sets the number of seconds.

## Memory Switch A:1 - Dialer

Switch	Initial Setting	Adjust	Usage/Comments
7	0	Dial pulse 0: Not available 1: Available	When set to “1”, the dial pulse setting can be selected in the phone type setting in EasyStart.
6	0	Factory use only	
5	0	Factory use only	
4	0	Factory use only	
3	0	PBX mode dial pause	Sets the number of seconds the unit waits before dialing when memory switch A:2, bit 0 is set to PBX mode.  Switch 3 2 1 0      Pause time 0 0 0 0      0 sec 0 0 0 1      1 sec 0 0 1 0      2 sec <u>0 0 1 1</u> <u>3 sec</u> Initial setting 0 1 0 0      4 sec 0 1 0 1      5 sec 0 1 1 0      6 sec 0 1 1 1      7 sec 1 0 0 0      8 sec 1 0 0 1      9 sec 1 0 1 0      10 sec 1 0 1 1      11 sec 1 1 0 0      12 sec 1 1 0 1      13 sec 1 1 1 0      14 sec 1 1 1 1      15 sec
2	0		
1	1		
0	1		

## Memory Switch A:2~ A:4 — Factory use only

## Memory Switch A:5 - Dialer

Switch	Initial Setting	Adjust	Usage/Comments
7	0	Factory use only	
6	1	Ring signal detect time	Set the time that an incoming ring will not be detected after hanging up. (Fax/Tel Ready mode only.) Switch 6 5 4 0 0 0 100 ms 0 0 1 200 ms 0 1 0 300 ms 0 1 1 400 ms 1 0 0 500 ms 1 0 1 600 ms 1 1 0 700 ms 1 1 1 800 ms
5	1		
4	0		
3	0	Number of rings 0: 1 ring 1: 2 rings	Sets the number of rings in Fax/Tel Ready mode. Incoming calls are answered according to this setting regardless of the number of rings chosen in the User Settings. If Silent Operation is enabled, this setting will change to 2 rings.
2	0	Dual ring detection 0: No 1: Yes	When enabled, the unit is able to auto answer an incoming ring with an off time of 120 - 60 ms.
1	0	Long ring detection 0: No 1: Yes	Allows the unit to respond to an incoming ring if the ring on-time is longer than two seconds.
0	1	Ring frequency detection 0: No 1: Yes	When disabled, the unit will not check the ring frequency of incoming rings.

## Memory Switch A:6 ~ A:9 — Factory use only



## Memory Switch B:0 - Transmission

Switch	Initial Setting	Adjust	Usage/Comments
7	1	Busy tone detection 0: No 1: Yes	Sets this switch to "0" if the ring tone of remote unit is mistaken for a busy signal.
6	0	Fallback pattern (bps) 2400 4800 7200 9600 14400 Set at 0: 2 times 2 times 2 times 2 times 2 times Set at 1: 4 times 1 times 1 times 1 times 1 times	
5	0	Overseas mode 0: No 1: Yes	Re-enables echo suppression that is disabled by the CED signal (2100 Hz). Also ignores the first DIS signal and transmits the DCS signal in response to the second DIS signal.
4	0	V.29 Echo Protect tone 0: No 1: Yes	International telephone lines equipped with echo suppression will cut the beginning portion of the transmitted information which may cause the receiver not to receive the training and data. To protect the received image from degrading, a 0.5 second Echo Protect tone is placed prior to the training using G3 high speed modem training (V.29).
3	0	Maximum transmit speed (kbps) 2.4 4.8 7.2 9.6 12 14.4 16.8 19.2 21.6 24 26.4 28.8 31.2 33.6 0 0 0 0 0 0 0 0 1 1 1 1 1 1 0 0 0 0 1 1 1 1 0 0 0 0 1 1 0 0 1 1 0 0 1 1 0 0 1 1 0 0 0 1 0 1 0 1 0 1 0 1 0 1 0 1 <b>Note:</b> The maximum speed for MFX-1200 is 14.4 kbps.	
2	1		
1	0		
0	1		

## Memory Switch B:1 - Transmission

Switch	Initial Setting	Adjust	Usage/Comments															
7	0	The time between reception of CFR and transmission of data  When CFR and data overlap due to line echo, increase the interval between CFR and data transmission using this switch.																
6	1	<table><tr><td></td><td>250 ms</td><td>500 ms</td><td>750 ms</td><td>1000 ms</td></tr><tr><td>Switch 7</td><td>0</td><td>0</td><td>1</td><td>1</td></tr><tr><td>Switch 6</td><td>0</td><td>1</td><td>0</td><td>1</td></tr></table>			250 ms	500 ms	750 ms	1000 ms	Switch 7	0	0	1	1	Switch 6	0	1	0	1
	250 ms	500 ms	750 ms	1000 ms														
Switch 7	0	0	1	1														
Switch 6	0	1	0	1														
5	0	Interval between DCS and TCF  When FTT is received after DCS and TCF signals due to line echo, increase the interval between DCS and TCF signals using this switch.																
4	0	<table><tr><td></td><td>75 ms</td><td>300 ms</td><td>450 ms</td><td>600 ms</td></tr><tr><td>Switch 5</td><td>0</td><td>0</td><td>1</td><td>1</td></tr><tr><td>Switch 4</td><td>0</td><td>1</td><td>0</td><td>1</td></tr></table>			75 ms	300 ms	450 ms	600 ms	Switch 5	0	0	1	1	Switch 4	0	1	0	1
	75 ms	300 ms	450 ms	600 ms														
Switch 5	0	0	1	1														
Switch 4	0	1	0	1														
3	0	Output attenuation	See table below															
2	1																	
1	1																	
0	1																	

Memory Switch B:1...Output attenuation

Switch	-15 dB	-14 dB	-13 dB	-12 dB	-11 dB	-10 dB	-9 dB	-8 dB	-7 dB	-6 dB	-5 dB	-4 dB	-3 dB	-2 dB	-1 dB	-0 dB
3	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
2	1	1	1	1	0	0	0	0	1	1	1	1	0	0	0	0
1	1	1	0	0	1	1	0	0	1	1	0	0	1	1	0	0
0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0

## Memory Switch B:2 - Transmission

Switch	Initial Setting	Adjust	Usage/Comments
7	0	Data signaling rate (DCS) 0: V.17 1: V.33	Determines communication protocol.
6	0	Forced received print when transmitting from memory 0: No 1: Yes	Will force a remote Muratec machine with memory receive capabilities to print directly. This switch will prevent a memory overflow error at the remote unit.
5	0	European date format on TTI 0: No 1: Yes	Assigns European date format to the transmitted TTI. (Example: 29 May 1997)
4	1	TTI transmit 0: No 1: Yes	When set at "0", transmission of the TTI is disabled. (Note: Turning TTI transmission off may violate local or federal regulations.)
3	0	ECM response time 0: 3 sec 1: 4.8 sec	The time limit to receive the response signal for the ECM post message.
2	0	ECM error retransmit time 0: 200 ms 1: 400 ms	The time limit before the ECM error is retransmitted.
1	0	Interval between DIS and DCS  0 ms   500 ms   1000 ms   1500 ms Switch 1   0   0   1   1 Switch 0   0   1   0   1	
0	0		

## Memory Switch B:3 - Transmission

Switch	Initial Setting	Adjust	Usage/Comments
7	0	Factory use only	
6	0	Factory use only	
5	0	Factory use only	
4	0	ECM mode 0: On 1: Off	Determines ECM mode. ECM mode reduces document memory and may lengthen transmission and reception times.
3	0	Retransmit automatically when receiving RTN/PIN signals 0: Yes 1: No	When set to "1", retransmission disables automatically if receiving RTN/PIN signals.
2	1	Factory use only	
1	0	Factory use only	
0	0	Factory use only	

## Memory Switch B:4 — Factory use only

## Memory Switch B:5 - Transmission

Switch	Initial Setting	Adjust	Usage/Comments
7	0	Program individual autodialer attributes 0: No 1: Yes	Allows individual setting of memory switches B:0 as attribute 1, B:1 as attribute 2, B:2 as attribute 3 and B:3 as attribute 4 when one-touch and speed dial locations are programmed. (Refer to page 3-34 for settings.)
6	0	Factory use only	
5	0	Factory use only	
4	0	Factory use only	
3	0	Factory use only	
2	0	Sending RTC signal when transmission is canceled 0: Yes 1: No	RTC signal is sent at the end of the transmission. When set at "0", the unit will send the RTC if the transmission is canceled. No error will occur. When set at "1", an error will occur because RTC will not be sent at the end of a canceled transmission.
1	1	Cancel redial if T.4.1 or T.4.4 error occurs 0: Yes 1: No	When set at "0", if a T.4.1 or T.4.4 error occurs, the unit will not retry the transmission.
0	0	Action after EOR signal 0: Continue 1: Discontinue	Sets action after receiving PPR four times at 2400 bps.

## Memory Switch B:6 - Transmission

Switch	Initial Setting	Adjust	Usage/Comments
7	0	Factory use only	
6	0	Factory use only	
5	0	Factory use only	
4	1	Factory use only	
3	1	Additional data on TTI transmit 0: No 1: Yes	When set at "0", the transmission of the additional data (time, the number of pages, file number, etc) is disabled. <b>Note:</b> This switch is available only when Memory switch B:2, bit 4 and/or Memory switch B:3, bit 5 is available.
2	1	Subscriber ID transmit 0: No 1: Yes	When set at "0", the transmission of the subscriber ID is disabled. <b>Note:</b> This switch is available only when Memory switch B:2, bit 4 and/or Memory switch B:3, bit 5 is available.
1	1	TTI (name) transmit 0: No 1: Yes	When set at "0", the transmission of the name which was stored in the unit is disabled. <b>Note:</b> This switch is available only when Memory switch B:2, bit 4 and/or Memory switch B:3, bit 5 is available.
0	0	Factory use only	

## Memory Switch B:7 ~ B:9 — Factory use only

## Memory Switch C:0 - Reception

Switch	Initial Setting	Adjust	Usage/Comments
7	0	Data error rate 0: 10% 1: 20%	Determines the allowable number of erred lines out of total lines received in a document.
6	0	Pause one second after sending CED 0: No (75 ms) 1: Yes (1 sec)	A 2100 Hz CED signal disables echo suppression in some telephone equipment. When set to "1", the unit pauses one second after sending CED, which allows echo suppression to restart. This may help with problematic overseas reception.
5	0	Factory use only	
4	0	Factory use only	
3	0	Receive speed (kbps) Maximum receive speed may be slowed to compensate for poor phone lines.	
2	1	2.4 4.8 7.2 9.6 12 14.4 16.8 19.2 21.6 24 26.4 28.8 31.2 33.6 0 0 0 0 0 0 0 0 1 1 1 1 1 1 0 0 0 0 1 1 1 1 0 0 0 0 1 1	
1	0	0 0 1 1 0 0 1 1 0 0 1 1 0 0 0 1 0 1 0 1 0 1 0 1 0 1 0 1	
0	1	<b>Note:</b> The maximum speed for MFX-1200 is 14.4 kbps.	

## Memory Switch C:1 - Reception

Switch	Initial Setting	Adjust	Usage/Comments
7	0	Factory use only	
6	0	Factory use only	
5	0	Factory use only	
4	0	T1 timer 0: 35 sec 1: 20 sec	Adjusts the T1 time-out. After the machine dials the remote machine's phone number, it begins sending CNG and waits this amount of time before disconnecting the line.
3	1	Print image data when post message is not received after receiving RTC signal 0: No 1: Yes	If the received document includes the RTC, the unit print the data even though the following protocol is not succeeded.
2	0	Disable ITU-T superfine reception 0: Yes 1: No	Set to "1" if a compatibility error occurs because the transmitting machine does not understand the extended frame for ITU-T superfine resolution. (Note: Setting this switch to "1" will disable superfine mode.)
1	0	G3 echo receive  Adjusts the delay between detection of training/TCF and sending of CFR.	
0	1	100 ms 500 ms 800 ms 1200 ms Switch 1 0 0 1 1 Switch 0 0 1 0 1	

## Memory Switch C:2 ~ C:9 — Factory use only

## Memory Switch D:0 - Reception

Switch	Initial Setting	Adjust	Usage/Comments
7	0	Number of HDLC end flags	Defines the number of HDLC end flags.  Switch 7 6 5 4 0 0 0 0    1 0 0 0 1    2 0 0 1 0    3    Initial setting 0 0 1 1    4 0 1 0 0    5 0 1 0 1    6 0 1 1 0    7 0 1 1 1    8 1 0 0 0    9 1 0 0 1    10 1 0 1 0    11 1 0 1 1    12 1 1 0 0    13 1 1 0 1    14 1 1 1 0    15 1 1 1 1    16
6	0		
5	1		
4	0		
3	0	Factory use only	
2	0	Group delay compensation 0: No 1: Yes	As if two exchangers are selected to communicate each other, compensate the group delay.
1	0	Digital cable equalizer 0: Free 1: Hold	When set to "1", become efficient for the line short break, but become weak for the line noise. It's available only for communication at 14,400 or 12,000 bit/s.
0	1	Carrier detection level 0: -43/48 dB 1: -47/52 dB	Setting this switch to "1" increases the sensitivity.

## Memory Switch D:1 - Reception

Switch	Initial Setting	Adjust	Usage/Comments
7	1	EYE-Q check level at 7200 bps	0 0 1 1
6	0		Strict-----Lenient 0 1 0 1
5	1	EYE-Q check level at 9600 bps	0 0 1 1
4	0		Strict-----Lenient 0 1 0 1
3	1	EYE-Q check level at 12000 bps	0 0 1 1
2	0		Strict-----Lenient 0 1 0 1
1	1	EYE-Q check level at 14400 bps	0 0 1 1
0	0		Strict-----Lenient 0 1 0 1

## Memory Switch D:2 - Reception

Switch	Initial Setting	Adjust	Usage/Comments
7	0	EYE-Q slice level 0: Disable 1: Enable	Setting this bit to "1" enables memory switch D:2, bits 0-3 and memory switch D:1, bits 0-7 and enables EYE-Q check adjustment.
6	1	Check EYE-Q 0: No 1: Yes	Set at 0: Line condition status (EYE-Q) is not checked after checking TCF. Set at 1: Line condition status (EYE-Q) is checked after checking TCF.
5	0	Factory use only	
4	0	Factory use only	
3	1	EYE-Q check level at	0 0 1 1
2	0	2400 bps	Strict -----Lenient 0 1 0 1
1	1	EYE-Q check level at	0 0 1 1
0	0	4800 bps	Strict -----Lenient 0 1 0 1

## Memory Switch D:3 - Reception

Switch	Initial Setting	Adjust	Usage/Comments
7	0	Factory use only	
6	0	Factory use only	
5	0	Factory use only	
4	0	Factory use only	
3	0	Factory use only	
2	0	Factory use only	
1	0	Delete receive echo of CFR at the receiver side 0: No 1: Yes	Modem will be opened only in high-speed mode. Sets this switch to "1" to resolve the problem caused of the echo of CFR.
0	0	Expand FSK receive time after detecting flag 0: 3.3 seconds 1: 10 seconds	Setting this switch to "1" extend HDLC frame receive timer in FSK from 3.3 seconds to 10 seconds after detecting pre-amble.

## Memory Switch D:4 ~ D:9 – Factory use only

## Memory Switch E:0 - Scanner

Switch	Initial Setting	Adjust	Usage/Comments
7	0	Factory use only	
6	0	Factory use only	
5	0	Factory use only	
4	0	Factory use only	
3	0	Factory use only	
2	0	Factory use only	
1	0	Factory use only	
0	1	Document TX length limit 0: 3.6 meters 1: 1 meter	Setting to unlimited will override document jam sensing.

## Memory Switch E:1 ~ F:9 — Factory use only

## Memory Switch G:0 - Remote reception

Switch	Initial Setting	Adjust	Usage/Comments
7	0	Factory use only	
6	1	CML relay off time after dialing 0: 1 sec 1: 200 ms	When dialing from the keypad, phone line noise may occur as the CML relay switches on and off. Set this switch to "0" to avoid this.
5	0	DTMF tones heard through handset 0: No 1: Yes	Determines if DTMF tones are produced through the handset in off-hook dialing.
4	0	Factory use only	
3	0	Factory use only	
2	0	Switch to fax upon TAD disconnect 0: No 1: Yes	In Ans/Fax Ready mode, if this switch is set to "1", the unit will switch to fax when any device connected to the external telephone jack, such as a second phone or TAD, hangs up.
1	0	Factory use only	
0	0	Remote reception from fax handset 0: No 1: Yes	Ability to perform remote reception (hook-flash transfer) from the fax handset.



## Memory Switch G:1 - Remote reception

Switch	Initial Setting	Adjust	Usage/Comments		
7	0	Off-hook / on-hook detect time (remote reception)	Sets the time interval between the off-hook/on-hook condition for remote reception. The total time of this time and the time specified in G:6 will be the actual time. <div>Switch 7 6 5 4    Time</div> <div>0 0 0 0    0 ms</div> <div>0 0 0 1    10 ms</div> <div>0 0 1 0    20 ms</div> <div><u>0 0 1 1</u>    <u>30 ms</u>    Initial setting</div> <div>0 1 0 0    40 ms</div> <div>0 1 0 1    50 ms</div> <div>0 1 1 0    60 ms</div> <div>0 1 1 1    70 ms</div> <div>1 0 0 0    80 ms</div> <div>1 0 0 1    90 ms</div> <div>1 0 1 0    100 ms</div> <div>1 0 1 1    110 ms</div> <div>1 1 0 0    120 ms</div> <div>1 1 0 1    130 ms</div> <div>1 1 1 0    140 ms</div> <div>1 1 1 1    150 ms</div>		
6	0				
5	1				
4	1				
3	0			Off-hook / on-hook detect time	Sets the time interval between the on-hook and off-hook(or off-hook/on-hook) condition. <div>Switch 3 2 1 0    Time</div> <div>0 0 0 0    0 ms</div> <div>0 0 0 1    100 ms</div> <div>0 0 1 0    200 ms</div> <div>0 0 1 1    300 ms</div> <div><u>0 1 0 0</u>    <u>400 ms</u>    Initial setting</div> <div>0 1 0 1    500 ms</div> <div>0 1 1 0    600 ms</div> <div>0 1 1 1    700 ms</div> <div>1 0 0 0    800 ms</div> <div>1 0 0 1    900 ms</div> <div>1 0 1 0    1000 ms</div> <div>1 0 1 1    1100 ms</div> <div>1 1 0 0    1200 ms</div> <div>1 1 0 1    1300 ms</div> <div>1 1 1 0    1400 ms</div> <div>1 1 1 1    1500 ms</div>
2	1				
1	0				
0	0				

## Memory Switch G:2 - Remote reception


Switch	Initial Setting	Adjust	Usage/Comments																																																																																																																							
7	0	Factory use only																																																																																																																								
6	0	Factory use only																																																																																																																								
5	0	Factory use only																																																																																																																								
4	1	CNG detect in Ans/Fax ready 0: No 1: Yes	When set to "1", the machine detects the CNG signal in Ans/Fax ready.																																																																																																																							
3	0	Switch-hook time	If the switch hook is quickly depressed and released, switch-to-fax will occur. This setting adjusts how quickly the switch hook activation must be. <table><tr><td>Switch</td><td>3</td><td>2</td><td>1</td><td>0</td><td>Time</td><td></td></tr><tr><td></td><td>0</td><td>0</td><td>0</td><td>0</td><td>0 ms</td><td></td></tr><tr><td></td><td>0</td><td>0</td><td>0</td><td>1</td><td>100 ms</td><td></td></tr><tr><td></td><td>0</td><td>0</td><td>1</td><td>0</td><td>200 ms</td><td></td></tr><tr><td></td><td>0</td><td>0</td><td>1</td><td>1</td><td>300 ms</td><td>Initial setting</td></tr><tr><td></td><td>0</td><td>1</td><td>0</td><td>0</td><td>400 ms</td><td></td></tr><tr><td></td><td>0</td><td>1</td><td>0</td><td>1</td><td>500 ms</td><td></td></tr><tr><td></td><td>0</td><td>1</td><td>1</td><td>0</td><td>600 ms</td><td></td></tr><tr><td></td><td>0</td><td>1</td><td>1</td><td>1</td><td>700 ms</td><td></td></tr><tr><td></td><td>1</td><td>0</td><td>0</td><td>0</td><td>800 ms</td><td></td></tr><tr><td></td><td>1</td><td>0</td><td>0</td><td>1</td><td>900 ms</td><td></td></tr><tr><td></td><td>1</td><td>0</td><td>1</td><td>0</td><td>1000 ms</td><td></td></tr><tr><td></td><td>1</td><td>0</td><td>1</td><td>1</td><td>1100 ms</td><td></td></tr><tr><td></td><td>1</td><td>1</td><td>0</td><td>0</td><td>1200 ms</td><td></td></tr><tr><td></td><td>1</td><td>1</td><td>0</td><td>1</td><td>1300 ms</td><td></td></tr><tr><td></td><td>1</td><td>1</td><td>1</td><td>0</td><td>1400 ms</td><td></td></tr><tr><td></td><td>1</td><td>1</td><td>1</td><td>1</td><td>1500 ms</td><td></td></tr></table>	Switch	3	2	1	0	Time			0	0	0	0	0 ms			0	0	0	1	100 ms			0	0	1	0	200 ms			0	0	1	1	300 ms	Initial setting		0	1	0	0	400 ms			0	1	0	1	500 ms			0	1	1	0	600 ms			0	1	1	1	700 ms			1	0	0	0	800 ms			1	0	0	1	900 ms			1	0	1	0	1000 ms			1	0	1	1	1100 ms			1	1	0	0	1200 ms			1	1	0	1	1300 ms			1	1	1	0	1400 ms			1	1	1	1	1500 ms	
Switch	3			2	1	0	Time																																																																																																																			
	0			0	0	0	0 ms																																																																																																																			
	0			0	0	1	100 ms																																																																																																																			
	0			0	1	0	200 ms																																																																																																																			
	0	0	1	1	300 ms	Initial setting																																																																																																																				
	0	1	0	0	400 ms																																																																																																																					
	0	1	0	1	500 ms																																																																																																																					
	0	1	1	0	600 ms																																																																																																																					
	0	1	1	1	700 ms																																																																																																																					
	1	0	0	0	800 ms																																																																																																																					
	1	0	0	1	900 ms																																																																																																																					
	1	0	1	0	1000 ms																																																																																																																					
	1	0	1	1	1100 ms																																																																																																																					
	1	1	0	0	1200 ms																																																																																																																					
	1	1	0	1	1300 ms																																																																																																																					
	1	1	1	0	1400 ms																																																																																																																					
	1	1	1	1	1500 ms																																																																																																																					
2	0																																																																																																																									
1	1																																																																																																																									
0	1																																																																																																																									

## Memory Switch G:3 - Remote reception and TAD interface

Switch	Initial Setting	Adjust	Usage/Comments		
7	0	Adjust silent detection time	This switch adjusts the length of silence required for silent detection activation. <div>Switch 7 6 5 4      Time</div> <div>0 0 0 0      0 sec</div> <div>0 0 0 1      1 sec</div> <div>0 0 1 0      2 sec</div> <div>0 0 1 1      3 sec</div> <div>0 1 0 0      4 sec</div> <div><u>0 1 0 1</u>      <u>5 sec</u>      Initial setting</div> <div>0 1 1 0      6 sec</div> <div>0 1 1 1      7 sec</div> <div>1 0 0 0      8 sec</div> <div>1 0 0 1      9 sec</div> <div>1 0 1 0      10 sec</div> <div>1 0 1 1      11 sec</div> <div>1 1 0 0      12 sec</div> <div>1 1 0 1      13 sec</div> <div>1 1 1 0      14 sec</div> <div>1 1 1 1      15 sec</div>		
6	1				
5	0				
4	1				
3	0			Number of seconds silent detection remains active	This switch adjusts the length of time silence detection remains active. <div>Switch 3 2 1 0      Time</div> <div>0 0 0 0      0 sec</div> <div>0 0 0 1      10 sec</div> <div>0 0 1 0      20 sec</div> <div>0 0 1 1      30 sec</div> <div>0 1 0 0      40 sec</div> <div>0 1 0 1      50 sec</div> <div><u>0 1 1 0</u>      <u>60 sec</u>      Initial setting</div> <div>0 1 1 1      70 sec</div> <div>1 0 0 0      80 sec</div> <div>1 0 0 1      90 sec</div> <div>1 0 1 0      100 sec</div> <div>1 0 1 1      110 sec</div> <div>1 1 0 0      120 sec</div> <div>1 1 0 1      130 sec</div> <div>1 1 1 0      140 sec</div> <div>1 1 1 1      150 sec</div>
2	1				
1	1				
0	0				

## Memory Switch G:4 - Remote reception and TAD interface

Switch	Initial Setting	Adjust	Usage/Comments
7	0	CNG detect period after TAD begins recording ICM	Sets the period during which CNG is detected after the TAD begins recording incoming message. Switch 7 6 5 4    Time 0 0 0 0    0 sec 0 0 0 1    10 sec 0 0 1 0    20 sec <u>0 0 1 1</u> 30 sec    Initial setting 0 1 0 0    40 sec 0 1 0 1    50 sec 0 1 1 0    60 sec 0 1 1 1    70 sec 1 0 0 0    80 sec 1 0 0 1    90 sec 1 0 1 0    100 sec 1 0 1 1    110 sec 1 1 0 0    120 sec 1 1 0 1    130 sec 1 1 1 0    140 sec 1 1 1 1    150 sec
6	0		
5	1		
4	1		
3	0		Sets the period during which CNG is detected after the TAD answers an incoming call. Switch 3 2 1 0    Time 0 0 0 0    0 sec <u>0 0 0 1</u> 10 sec    Initial setting 0 0 1 0    20 sec 0 0 1 1    30 sec 0 1 0 0    40 sec 0 1 0 1    50 sec 0 1 1 0    60 sec 0 1 1 1    70 sec 1 0 0 0    80 sec 1 0 0 1    90 sec 1 0 1 0    100 sec 1 0 1 1    110 sec 1 1 0 0    120 sec 1 1 0 1    130 sec 1 1 1 0    140 sec 1 1 1 1    150 sec
2	0		
1	0		
0	1		

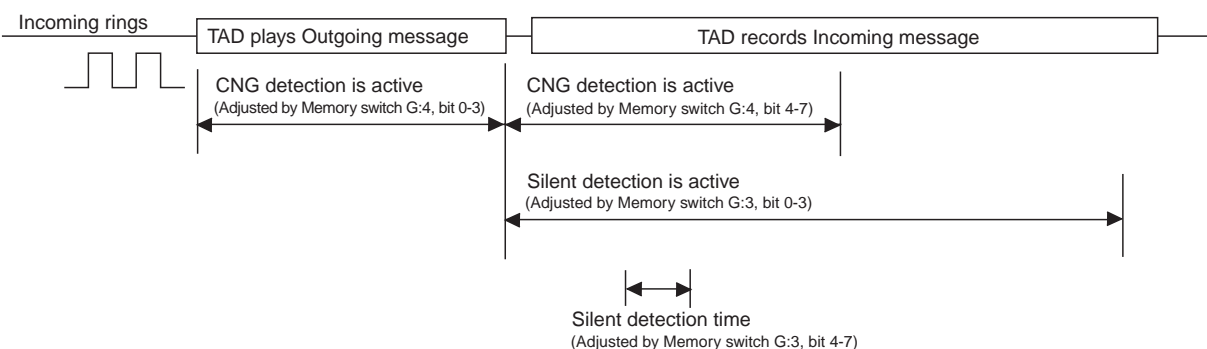

## Memory Switch G:5 - Remote reception

Switch	Initial Setting	Adjust	Usage/Comments
7	0	Adjust the detect time for regarding as the CI signal.	Increase/decrease the time specified in this switch from the standard detect time. Determine it in G:5 bit 3 whether increase or decrease. Switch 7 6 5 4      Time 0 0 0 1      10 msec 0 0 1 0      20 msec 0 0 1 1      30 msec   1 1 1 1      150 msec
6	0		
5	0		
4	0		
3	0	Adjust the detect time for regarding as the CI signal. 0: decrease 1: increase	Increase/decrease the time specified in G:5 bit 4 to 7 from the standard detect time.
2	0	Factory use only	
1	0	Factory use only	
0	0	Beep if fax handset hang up 0: Yes 1: No	Determines if your fax beeps when having left the fax's handset hanging up after communication.

## Memory Switch G:6 - Remote reception and TAD interface

Switch	Initial Setting	Adjust	Usage/Comments
7	0	Off-hook / on-hook detect time for remote reception	Sets the time interval between the off-hook/on-hook condition for remote reception. The total time of this time and the time specified in G:1 bit 4 to 7 will be the actual time.  Switch 7 6 5 4 3 2 1 0      Time 0 0 0 0 0 0 0 0      0 ms      Initial setting 0 0 0 0 0 0 0 1      20 ms 0 0 0 0 0 0 1 0      40 ms 0 0 0 0 0 0 1 1      60 ms 0 0 0 0 0 1 0 0      80 ms   1 1 1 1 1 1 1 0      5080 ms 1 1 1 1 1 1 1 1      5100 ms
6	0		
5	0		
4	0		
3	0		
2	0		
1	0		
0	0		

## Memory Switch G:7 ~ G:9 — Factory use only

## Memory Switch H:0 - Operation

Switch	Initial Setting	Adjust	Usage/Comments
7	0	Display error line 0: No 1: Yes	The number of error lines contained in the received data will be shown in the LCD.
6	0	Total line monitor 0: No 1: Yes	Allows fax communication to be heard through the monitor speaker.
5	0	Factory use only	
4	0	Sort autodialer printout 0: Sort by autodialer location 1: Sort by location ID	Specifies how entries on autodialer printouts are sorted.
3	1	Print check message if power is lost 0: No 1: Yes	In the event of two power losses in a 40 hour period, documents will be lost. When power is restored, a check message will print.
2	1	Print page if error occurs during memory transmission 0: No 1: Yes	For easy identification, the first page of a document stored for memory transmission will print along a check message if an error occurs during memory transmission.
1	1	Print check message 0: No 1: Yes	To notify the user of an error, a check message can be printed if a communication error occurs.
0	0	Stop printing check message for a memory transmission by pressing the stop key 0: No 1: Yes	Determines if pressing the stop key stop printing the check message for a memory transmission.

## Memory Switch H:1 - Operation

Switch	Initial Setting	Adjust	Usage/Comments
7	0	Factory use only	
6	0	Factory use only	
5	1	Print TCR with the original page	See table below
4	0	Factory use only	
3	1	Print TCR with the original page 0: No 1: Yes	For easy identification, the first page of a document stored for memory transmission will print along a TCR.
2	0	Factory use only	
1	0	Factory use only	
0	0	Display modem speed 0: No 1: Yes	The transmit/receive speed is displayed in the LCD.

Memory switch H:1 ... Print TCR with the original page

Switch 3	0		1	
Switch 5	0	1	0	1
When Memory transmission was OK, ...	No	No	Yes	Yes
When Memory transmission was NG, ...	No	Yes	No	Yes
When all broadcast transmissions were OK, ...	No	No	Yes	Yes
When some broadcast transmissions were NG, ...	No	Yes	No	Yes

## Memory Switch H:2 - Operation

Switch	Initial Setting	Adjust	Usage/Comments
7	0	Factory use only	
6	0	Factory use only	
5	0	Factory use only	
4	0	Factory use only	
3	0	Factory use only	
2	0	Print the transmission time on RCR 0: No 1: Yes	Determines if printing the communicating duration (in minutes and seconds) on the confirmation report (RCR).
1	1	Erase polled document 0: No 1: Yes	Determines if a document stored for polling is erased after being polled.
0	1	Print TCR after the batch transmission 0: No 1: Yes	Determines if printing the confirmation report after completing the batch transmission.

## Memory Switch H:3 ~ J:9 — Factory use only

### 3.4 Clear Programmed Data / User Settings

User programmed information such as autodialer entries, date, time, Transmit Terminal Identifier (TTI), Subscriber ID, etc., are stored in the unit's Random Access Memory (RAM). This information is held by a battery back up when the power is lost.

This function does not clear the machine parameters, memory switches and unique switches. Therefore, this setting is useful to reset the user programmed information but leave specific parameters and switches configured for a particular telephone system, etc.

To reset only each switch, see page 3-2, 3-17 and 3-37.

**Note:** If desired, the All RAM Clear setting can be used to erase all user programmed information, all documents in memory, and reset the memory switches and machine parameters to factory defaults. For information on the All RAM Clear setting, see the next page.

1. To clear programmed data and user settings, from standby, press **Program key**, \*, 2.

Clear User Settings Check Enter/Cancel
---

2. Press **ENTER**.

**Note:** To finish the operation without performing initialization, press **CANCEL**.

## 3.5 All RAM Clear

The All RAM Clear setting will erase all user programmed information, all documents in memory, and reset the memory switches and machine parameters to factory defaults.

This feature may also be used to try and clear a machine malfunction or lock up. If possible, when the All RAM Clear is used to reset a malfunction or lock up, it is advisable to print the machine settings, one-touch and speed dial listings to help in reprogramming this information.

**Note:** The All RAM Clear does not clear the machine parameters, life monitor and consumable order sheet. If you need to clear them, see “Clearing the machine parameters,” page 3-2 or “Clear Life Monitor,” page 3-76.

1. To perform an All RAM Clear, from standby, press **Program key**, **\***, **3**.

All RAM Clear Check Enter/Cancel
-------------------------------------

2. Press **ENTER**.

**Note:** To finish the operation without performing RAM clear, press **CANCEL**.

## 3.6 Setting Individual Autodialer Attributes

This function allows the user to configure an individual one-touch or speed dial entry with the settings shown in Memory Switches B:0, B:1, B:2 and B:3.

### To set the individual attributes:

1. Change memory switch B:5, bit 7 to a “1”. (See setting 3.3.1 Setting the Memory Switches for more information on changing memory switch B:5.)
2. When the function is enabled, an “Attribute” option is added to the autodialer programming steps. As a one-touch or speed dial location is programmed, an extra step showing Attribute 1, Attribute 2, Attribute 3, and Attribute 4 are added as the last step.

01:Attribute1 10001101
---------------------------

Bit No. 76543210

3. Set the individual bit positions as shown in the following table. To change a setting, press ◀ or ▶ until the cursor is the below the desired bit position; then press “1” or “0” to make the change.
4. Press **ENTER** to save the setting of the displayed attribute and advance to the next attribute.
5. To set the other attribute, repeat steps 3-4.
6. When the last attribute is set, the fax will advance to the next autodialer programming steps.



## Attribute 1 - Individual Autodialer Setting (Equivalent to Memory Switch B:0)

Switch	Initial Setting	Adjust	Usage/Comments
7	1	Busy tone detection 0: No 1: Yes	Sets this switch to "0" if the ring tone of remote unit is mistaken for a busy signal.
6	0	Fallback pattern (bps) 2400 4800 7200 9600 14400 Set at 0: 2 times 2 times 2 times 2 times 2 times Set at 1: 4 times 1 times 1 times 1 times 1 times	
5	0	Overseas mode 0: No 1: Yes	Re-enables echo suppression that is disabled by the CED signal (2100 Hz). Also ignores the first DIS signal and transmits the DCS signal in response to the second DIS signal.
4	0	V.29 Echo Protect tone 0: No 1: Yes	International telephone lines equipped with echo suppression will cut the beginning portion of the transmitted information which may cause the receiver not to receive the training and data. To protect the received image from degrading, a 0.5 second Echo Protect tone is placed prior to the training using G3 high speed modem training (V.29).
3	0	Maximum transmit speed (kbps) 2.4 4.8 7.2 9.6 12 14.4 16.8 19.2 21.6 24 26.4 28.8 31.2 33.6	
2	1	0 0 0 0 0 0 0 0 1 1 1 1 1 1 0 0 0 0 1 1 1 1 0 0 0 0 1 1	
1	0	0 0 1 1 0 0 1 1 0 0 1 1 0 0 0 1 0 1 0 1 0 1 0 1 0 1 0 1	
0	1	<b>Note:</b> The maximum speed for MFX-1200 is 14.4 kbps.	

## Attribute 2 - Individual Autodialer Setting (Equivalent to Memory Switch B:1)

Switch	Initial Setting	Adjust	Usage/Comments
7	0	The time between reception of CFR and transmission of data  When CFR and data overlap due to line echo, increase the interval between CFR and data transmission using this switch.	
6	1	250 ms 500 ms 750 ms 1000 ms Switch 7 0 0 1 1 Switch 6 0 1 0 1	
5	0	Interval between DCS and TCF  When FTT is received after DCS and TCF signals due to line echo, increase the interval between DCS and TCF signals using this switch.	
4	0	75 ms 300 ms 450 ms 600 ms Switch 5 0 0 1 1 Switch 4 0 1 0 1	
3	0	Output attenuation	See table on next page.
2	1		
1	1		
0	1		

Output attenuation when individual autodialer attributes are set.

Switch	-15 dB	-14 dB	-13 dB	-12 dB	-11 dB	-10 dB	-9 dB	-8 dB	-7 dB	-6 dB	-5 dB	-4 dB	-3 dB	-2 dB	-1 dB	-0 dB
3	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
2	1	1	1	1	0	0	0	0	1	1	1	1	0	0	0	0
1	1	1	0	0	1	1	0	0	1	1	0	0	1	1	0	0
0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0

### Attribute 3 - Individual Autodialer Setting (Equivalent to Memory Switch B:2)

Switch	Initial Setting	Adjust	Usage/Comments
7	0	Data signaling rate (DCS) 0: V.17 1: V.33	Determines communication protocol.
6	0	Forced received print when transmitting from memory 0: No 1: Yes	Will force a remote Muratec machine with memory receive capabilities to print directly. This switch will prevent a memory overflow error at the remote unit.
5	0	European date format on TTI 0: No 1: Yes	Assigns European date format to the transmitted TTI. (Example: 29 January 2001)
4	1	TTI transmit 0: No 1: Yes	When set at "0", transmission of the TTI is disabled. (Note: Turning TTI transmission off may violate local or federal regulations.)
3	0	ECM response time 0: 3 sec 1: 4.8 sec	The time limit to receive the response signal for the ECM post message.
2	0	ECM error retransmit time 0: 200 ms 1: 400 ms	The time limit before the ECM error is retransmitted.
1	0	Interval between DIS and DCS	
0	0		
		0 ms   500 ms   1000 ms   1500 ms	
		Switch 1   0   0   1   1	
		Switch 0   0   1   0   1	

**Attribute 4 - Individual Autodialer Setting (Equivalent to Memory Switch B:3)**

Switch	Initial Setting	Adjust	Usage/Comments
7	0	Factory use only	
6	0	Factory use only	
5	0	Factory use only	When set at "1", transmission of the CSI, TSI and CIG signals are disabled.
4	0	ECM mode 0: On 1: Off	Determines ECM mode. ECM mode reduces document memory and may lengthen transmission and reception times.
3	0	Retransmit automatically when receiving RTN/PIN signals 0: Yes 1: No	When set to "1", retransmission disables automatically if receiving RTN/PIN signals.
2	1	Factory use only	
1	0	Factory use only	
0	0	Factory use only	

## 3.7 Unique Switch Adjustment

### 3.7.1 Setting the Unique Switches

These switches are used to program internal machine parameters. The primary back up battery maintains these settings if power is lost.

1. From standby, press **Program key**, \*, 4.

```
Set Uniq Switch
◀/▶/Enter
```

2. Press **ENTER**.

```
a0:      01000001
◀/▶/Enter
```

3. Select the desired unique switch by pressing a one-touch key plus a number on the keypad. For example, to access parameter B:1, press one-touch “B” plus the number “1” on the numeric keypad.

```
b1:      00000000
◀/▶/Enter
```

4. Press **ENTER**.

```
Set Uniq Switch
b1      00000000
Bit No. 76543210
```

(The bits are numbered 7 through 0 – bit 7 is left most.)

5. To navigate through the unique switch settings:

- Press ◀ key to move the cursor to the left.
- Press ▶ key to move the cursor to the right.
- Press the 0 or 1 on the numeric keypad to change the bit value.
- Press **ENTER** to save the setting of the displayed unique switch and advance to the next unique switch.

(Continue pressing **ENTER** until the desired unique switch is shown in the display. Be sure to press **ENTER** after each unique switch is programmed to save the new setting.)

- Press **STOP** to return the unit to standby.

**Note:** You can confirm the initial setting of each Unique Switch by the Unique Switches List.  
The Unique Switches List will be printed by pressing **Program key**, \*, A(01).

### Clearing the Unique Switches

Resets the unique switches to factory defaults.

1. From standby, press **Program key**, \*, 4, ▶.

```
Clear Uniq Switch
◀/▶/Enter
```

2. Press **ENTER**.

```
Clear Uniq Switch
Check Enter/Cancel
```

3. Press **ENTER**. The unique switches will reset to factory defaults.

**Note:** To finish the operation without clearing the unique switches, press **CANCEL**.

## Unique Switch a:0 — Dialer

Switch	Initial Setting	Adjust	Usage/Comments
7	0	Factory use only	
6	0	Congestion tone detection 0: No 1: Yes	Setting this switch to "0", ignores telephone line congestion tones.
5	1	Ring back tone wait time (seconds)	Sets the time until the ring back tone begins after answering an incoming call in the Fax/Tel Ready or Tel/Fax Ready mode.
4	0	<div>3.0 3.3 3.6 3.9</div> <div>Switch 5: 0 0 1 1</div> <div>Switch 4: 0 1 0 1</div>	
3	0	Factory use only	
2	0	Factory use only	
1	0	Factory use only	
0	1	Factory use only	

## Unique Switch a:1 ~ a:9 — Factory use only

## Unique Switch b:0 - Transmission

Switch	Initial Setting	Adjust	Usage/Comments
7	0	Factory use only	
6	0	Transmission when disable to detect first NSF 0: Retry to detect NSF 1: Transmit with the standard protocol	Determine the action when disable to detect first NSF.
5	0	Factory use only	
4	0	Factory use only	
3	0	Factory use only	
2	0	Factory use only	
1	1	The number of times PPR is detected during ECM transmission 1 time 2 times 3 times 4 times	
0	1	<div>0 0 1 1</div> <div>0 1 0 1</div>	

## Unique Switch b:1 ~ b:5 — Factory use only

## Unique Switch b:6 - Transmission

Switch	Initial Setting	Adjust	Usage/Comments
7	1	Available *, # and space upon <i>F-code</i> SUB/SEP registration 0: No 1: Yes	Determines if checking the * (asterisk), # (sharp) and space upon <i>F-code</i> SUB/SEP registration.
6	1	Available *, # and space upon <i>F-code</i> communicating 0: No 1: Yes	Determines if checking the * (asterisk), # (sharp) and space upon <i>F-code</i> communicating.
5	0	Available space in <i>F-code</i> ID 0: No 1: Yes	Determines if checking the space in <i>F-code</i> ID.
4	1	<i>F-code</i> sub-frame off 0: Send 1: Not send	Do not send the sub-address and password of <i>F-code</i> box at the point of sending DCS signal after EOM signal.
3	0	Send <i>F-code</i> box's TTI 0: No 1: Yes	Transmit the sub-address and box name of <i>F-code</i> box with <i>F-code</i> polling document.
2	0	Factory use only	
1	0	Retrieve document 0: No 1: Yes	Retrieve the document received in <i>F-code</i> SecureMail box by polling transmission.
0	1	Ignore <i>F-code</i> bit 0: No 1: Yes	Neglect SEP bit of DTC signal or SUB bit of DCS signal at <i>F-code</i> polled transmission.

**Note:** The "F-code communication" is possible the SecureMail and Polling operation using the F-code (SUB/SEP/PWD/SID). However, it is not based on T.33 recommendation.

## Unique Switch b:7 — Transmission

Switch	Initial Setting	Adjust	Usage/Comments
7	0	Factory use only	
6	0	Factory use only	
5	0	Factory use only	
4	0	Factory use only	
3	0	Factory use only	
2	0	Factory use only	
1	1	Factory use only	
0	0	Factory use only	

## Unique Switch b:8 - Transmission

Switch	Initial Setting	Adjust	Usage/Comments
7	0	Factory use only	
6	0	Factory use only	
5	0	Factory use only	
4	0	Factory use only	
3	0	Factory use only	
2	0	Factory use only	
1	0	Factory use only	
0	0	Transmission when disable to detect first NSF in feeder transmission. 0: Retry to detect NSF 1: Transmit with the standard protocol	Determine the action when disable to detect first NSF in feeder transmission.

## Unique Switch b:9 – Factory use only

## Unique Switch c:0 - Reception

Switch	Initial Setting	Adjust	Usage/Comments
7	0	Factory use only	
6	0	Factory use only	
5	1	Factory use only	
4	1	Transmit CED signal when manual/remote receive 0: No 1: Yes	Determines if sending CED signal at on-hook transfer.
3	1	Pseudo-ring start time (seconds) 5 6 8 10	Sets the time the pseudo-ring begins after answering an incoming call. (Fax/Tel Ready or Tel/Fax Ready mode only.)
2	0	Switch 3: 0 0 1 1 Switch 2: 0 1 0 1	
1	1	Factory use only	
0	1	Factory use only	

## Unique Switch c:1 - Reception

Switch	Initial Setting	Adjust	Usage/Comments		
7	0	T1 timer adjustment	When the unit switches to fax by on-hook transfer, the unit will seize the telephone line and attempt to handshake.  Switch 7 5 6 4      Settings 0 0 0 0      0 s 0 0 0 1      2 s 0 0 1 0      4 s 0 0 1 1      6 s 0 1 0 0      8 s 0 1 0 1      10 s <u>0 1 1 0</u> 12 s ← Initial setting 0 1 1 1      14 s 1 0 0 0      16 s 1 0 0 1      18 s 1 0 1 0      20 s 1 0 1 1      22 s 1 1 0 0      24 s 1 1 0 1      26 s 1 1 1 0      28s 1 1 1 1      30 s		
6	1				
5	1				
4	0				
3	1			TCF check time (in 100 ms units)	If the TCF time is such that poor image quality is the result, lengthen the TCF check time.  Switch 3 2 1 0      Time 0 0 0 0      0 ms 0 0 0 1      100 ms 0 0 1 0      200 ms 0 0 1 1      300 ms 0 1 0 0      400 ms 0 1 0 1      500 ms 0 1 1 0      600 ms 0 1 1 1      700 ms 1 0 0 0      800 ms 1 0 0 1      900 ms <u>1 0 1 0</u> 1000 ms      Initial setting 1 0 1 1      1100 ms 1 1 0 0      1200 ms 1 1 0 1      1300 ms 1 1 1 0      1400 ms 1 1 1 1      1500 ms
2	0				
1	1				
0	0				



## Unique Switch c:2 - Reception

Switch	Initial Setting	Adjust	Usage/Comments
7	0	Factory use only	
6	0	Factory use only	
5	0	Factory use only	
4	0	Factory use only	
3	0	Factory use only	
2	0	Receive the junk fax 0: Yes 1: No	When the block junk fax feature was set to Mode 2 and the fax does not receive the TSI signal from the remote fax, determines if receiving the fax other than the remote fax number set to the block junk dial list.
1	0	Factory use only	
0	0	Call request when remaining memory size is small 0:No 1:Yes	Setting this switch to "1" prompt call request to transmitter when remaining memory size is small after receiving the document which not the last page.

## Unique Switch c:3 - Reception

Switch	Initial Setting	Adjust	Usage/Comments
7	0	Factory use only	
6	0	Factory use only	
5	0	Factory use only	
4	0	Factory use only	
3	0	Factory use only	
2	0	Factory use only	
1	0	Number of seconds pseudo-ring rings (seconds) 30 40 50 60	Sets the length of time the pseudo-ring rings.
0	0	Switch 1: 0 0 1 1 Switch 0: 0 1 0 1	

## Unique Switch c:4 ~ c:9 — Factory use only

### Unique Switch d:0 - Modem

Switch	Initial Setting	Adjust	Usage/Comments
7	0	Factory use only	
6	0	Factory use only	
5	1	Factory use only	
4	1	Factory use only	
3	1	Factory use only	
2	1	Factory use only	
1	0	Factory use only	
0	1	Factory use only	

### Unique Switch d:1 - Modem

Switch	Initial Setting	Adjust	Usage/Comments
7	0	Factory use only	
6	0		
5	0		
4	1		
3	0		
2	1		
1	0		
0	0		

## Unique Switch d:2 - Modem

Switch	Initial Setting	Adjust	Usage/Comments
7	1	Factory use only	
6	0	Factory use only	
5	0	Factory use only	
4	1	Factory use only	
3	0	Factory use only	
2	1	Factory use only	
1	0	Factory use only	
0	1	Factory use only	

## Unique Switch d:3 ~ d:5 — Factory use only

## Unique Switch d:6 - Modem

Switch	Initial Setting	Adjust	Usage/Comments															
7	0	Factory use only																
6	0	Silent detection sensitivity	<p>The closer the sensitivity setting is to –16 dB, the less likely it will be that the unit will detect low level noise on the line. This increases the possibility for the unit to switch using the silent detection when in the Ans/Fax Ready mode. The closer the setting –43 dB, the more likely it is to detect noise. This will decrease the possibility of switching due to silent detection.</p> <table><tr><td></td><td>-43 dB</td><td>-33 dB</td><td>-26 dB</td><td>-16 dB</td></tr><tr><td>Switch 6:</td><td>0</td><td>0</td><td>1</td><td>1</td></tr><tr><td>Switch 5:</td><td>0</td><td>1</td><td>0</td><td>1</td></tr></table>		-43 dB	-33 dB	-26 dB	-16 dB	Switch 6:	0	0	1	1	Switch 5:	0	1	0	1
	-43 dB			-33 dB	-26 dB	-16 dB												
Switch 6:	0			0	1	1												
Switch 5:	0	1	0	1														
5	0																	
4	0	Factory use only																
3	0	Factory use only																
2	0	Factory use only																
1	1	Factory use only																
0	1	Factory use only																

### Unique Switch d:7 - Modem

Switch	Initial Setting	Adjust	Usage/Comments
7	0	Factory use only	
6	0	Factory use only	
5	0	Factory use only	
4	0	Factory use only	
3	0		
2	0	Factory use only	
1	0	Factory use only	
0	0	Factory use only	

### Unique Switch d:8 ~ e:1 — Factory use only

### Unique Switch e:2 - Scanner

Switch	Initial Setting	Adjust	Usage/Comments
7	0	Factory use only	
6	0	Factory use only	
5	0	Factory use only	
4	0	Factory use only	
3	0	Factory use only	
2	0	Factory use only	
1	0	Mirror carriage home position 0: FBS 1: ADF	This switch is only effective when the unique switch E:2 bit 0 is set at "0". Determines the Mirror carriage home position.
0	1	Mirror carriage home position 0: Fixed 1: Variable	Determines the Mirror carriage home position.

**Note:** These settings effect after turn the power switch off/on.

### Unique Switch e:3 ~ e:6 — Factory use only

## Unique Switch e:7 - Scanner

Switch	Initial Setting	Adjust	Usage/Comments
7	0	Factory use only	
6	0	Factory use only	
5	0	Right edge document margin adjustment upon scanning using FBS	Switch 5 4 3 2 1 0 Settings
			0 0 0 0 0 0 0 mm
			0 0 0 0 0 1 1 mm
			0 0 0 0 1 0 2 mm
			0 0 0 0 1 1 3 mm
4	0	Adjusts the right edge margin when scanning document by FBS.	0 0 0 1 0 0 4 mm
			0 0 0 1 0 1 5 mm
			0 0 0 1 1 0 6 mm
			0 0 0 1 1 1 7 mm
		Each setting changes by 1 mm.	0 0 1 0 0 0 8 mm
3	0		0 0 1 0 0 1 9 mm
			0 0 1 0 1 0 10 mm
			0 0 1 0 1 1 11 mm
			0 0 1 1 0 0 12 mm
			0 0 1 1 0 1 13 mm
2	0		0 0 1 1 1 0 14 mm
			0 0 1 1 1 1 15 mm
			0 1 0 0 0 0 16 mm
			0 1 0 0 0 1 17 mm
			0 1 0 0 1 0 18 mm
1	0		0 1 0 0 1 1 19 mm
			0 1 0 1 0 0 20 mm
			0 1 0 1 0 1 21 mm
			0 1 0 1 1 0 22 mm
			0 1 0 1 1 1 23 mm
0	0		0 1 1 0 0 0 24 mm
			0 1 1 0 0 1 25 mm
			:
			:
			1 1 1 1 1 1 63 mm

## Unique Switch e:8 - Scanner

Switch	Initial Setting	Adjust	Usage/Comments
7	0	Factory use only	
6	0	Factory use only	
5	0	Leading edge document margin adjustment upon scanning using FBS	Switch 5 4 3 2 1 0      Settings
			0 0 0 0 0 0      0 mm
			0 0 0 0 0 1      1 mm
			0 0 0 0 1 0      2 mm
			0 0 0 0 1 1      3 mm
4	0	Adjusts the leading edge margin when scanning document by FBS.	0 0 0 1 0 0      4 mm
			0 0 0 1 0 1      5 mm
			0 0 0 1 1 0      6 mm
			0 0 0 1 1 1      7 mm
		Each setting changes by 1 mm.	0 0 1 0 0 0      8 mm
3	0		0 0 1 0 0 1      9 mm
			0 0 1 0 1 0      10 mm
			0 0 1 0 1 1      11 mm
			0 0 1 1 0 0      12 mm
			0 0 1 1 0 1      13 mm
2	0		0 0 1 1 1 0      14 mm
			0 0 1 1 1 1      15 mm
			0 1 0 0 0 0      16 mm
			0 1 0 0 0 1      17 mm
			0 1 0 0 1 0      18 mm
1	0		0 1 0 0 1 1      19 mm
			0 1 0 1 0 0      20 mm
			0 1 0 1 0 1      21 mm
			0 1 0 1 1 0      22 mm
			0 1 0 1 1 1      23 mm
0	0		0 1 1 0 0 0      24 mm
			0 1 1 0 0 1      25 mm
			:
			:
			1 1 1 1 1 1      63 mm

## Unique Switch e:9 - Scanner

Switch	Initial Setting	Adjust	Usage/Comments
7	0	Factory use only	
6	0	Factory use only	
5	0	Trailing edge document margin adjustment upon scanning using FBS	<div>Switch 5 4 3 2 1 0</div> <div>Settings</div> <div>0 0 0 0 0 0 0 mm</div> <div>0 0 0 0 0 1 1 mm</div> <div>0 0 0 0 1 0 2 mm</div> <div>0 0 0 0 1 1 3 mm</div> <div>0 0 0 1 0 0 4 mm</div> <div>0 0 0 1 0 1 5 mm</div> <div>0 0 0 1 1 0 6 mm</div> <div>0 0 0 1 1 1 7 mm</div> <div>0 0 1 0 0 0 8 mm</div> <div>0 0 1 0 0 1 9 mm</div> <div>0 0 1 0 1 0 10 mm</div> <div>0 0 1 0 1 1 11 mm</div> <div>0 0 1 1 0 0 12 mm</div> <div>0 0 1 1 0 1 13 mm</div> <div>0 0 1 1 1 0 14 mm</div> <div>0 0 1 1 1 1 15 mm</div> <div>0 1 0 0 0 0 16 mm</div> <div>0 1 0 0 0 1 17 mm</div> <div>0 1 0 0 1 0 18 mm</div> <div>0 1 0 0 1 1 19 mm</div> <div>0 1 0 1 0 0 20 mm</div> <div>0 1 0 1 0 1 21 mm</div> <div>0 1 0 1 1 0 22 mm</div> <div>0 1 0 1 1 1 23 mm</div> <div>0 1 1 0 0 0 24 mm</div> <div>0 1 1 0 0 1 25 mm</div> <div>:</div> <div>:</div> <div>1 1 1 1 1 1 63 mm</div>
4	0	Adjusts the trailing edge margin when scanning document by FBS.	
3	0	Each setting changes by 1 mm.	
2	0		
1	0		
0	0		

### Unique Switch f:0 - Printer

Switch	Initial Setting	Adjust	Usage/Comments
7	0	Factory use only	Smoothes the data scanned in each resolution mode.
6	0	Factory use only	
5	0	Factory use only	
4	0	Factory use only	
3	0	Factory use only	
2	1	Smoothing in S-Fine resolution in receive mode 0: No 1: Yes	
1	0	Smoothing in Fine resolution in receive mode 0: No 1: Yes	
0	1	Smoothing in Normal resolution in receive mode 0: No 1: Yes	

### Unique Switch f:1 - Printer

Switch	Initial Setting	Adjust	Usage/Comments
7	0	Factory use only	
6	0	Factory use only	
5	0	Factory use only	
4	0	Factory use only	
3	0	Factory use only	
2	1	Factory use only	
1	0	Factory use only	
0	0	Print reduction 0: No 1: Yes	If the document size is different from the recording paper size in the paper cassette: When set to "0", print the image at 100 % size on two or more pages. When set to "1", reduce printout to fit on one sheet.



## Unique Switch f:2 - Printer

Switch	Initial Setting	Adjust	Usage/Comments
7	0	Factory use only	
6	0	Factory use only	
5	0	LED print head exposure time adjustment for lists, test patterns and PCL printing  1 step = 1.74 $\mu$ s  Note: This setting effects after turning the power switch off/on.	Initial setting is "000000" and 28.65 $\mu$ sec. If you want to change the exposure time, set this switch within the following range. If you set the time to be shorter, the print density will be light.  Switch 5 4 3 2 1 0 1 0 0 0 0 0    54.69 $\mu$ sec    Darkest   1 1 0 0 0 1    25.17 $\mu$ s 1 1 0 0 0 0    26.91 $\mu$ s 1 0 1 1 1 1    28.65 $\mu$ s 1 0 1 1 1 0    30.38 $\mu$ s 1 0 1 1 0 1    32.12 $\mu$ s   1 1 1 1 1 1    0.87 $\mu$ s    Lightest
4	0		
3	0		
2	0		
1	0		
0	0		

## Unique Switch f:3 ~ f:4 — Factory use only

## Unique Switch f:5 - Printer

Switch	Initial Setting	Adjust	Usage/Comments
7	1	Factory use only	
6	0	Limit of the memory capacity in Reverse order print	Determine the limit of the memory capacity for storing the received document in the reverse order print. If the data reached to this limit during receiving, the normal order print will start.  Switch 6 5 0 0    126 KB 0 1    521 KB 1 0    1024 KB 1 1    2048 KB
5	1		
4	0	Ignore the size error with bypass tray 0: No 1: Yes	
3	0	Factory use only	
2	0	Make masking for A4 sized paper 0: Yes 1: No	Setting to "0", the machine makes masking of 3mm each on the right, left, upper and lower side. Setting to "1", the machine makes no masking on the right and left side when printing on the A4 sized paper. <b>Note:</b> The machine always makes the upper and lower masks regardless of this setting.
1	0	Factory use only	
0	1	Primary copying upon printing the received data 0: No 1: Yes	Setting to "1", the copying job will interrupt the printing job of received document.

## Unique Switch f:6 - Printer

Switch	Initial Setting	Adjust	Usage/Comments
7	0	Factory use only	
6	0	Factory use only	
5	0	LED print head exposure time adjustment for copies and receiving documents  1 step = 1.74 $\mu$ s  Note: This setting effects after turning the power switch off/on.	Initial setting is "000000" and 28.65 $\mu$ sec. If you want to change the exposure time, set this switch within the following range. If you set the time to be shorter, the print density will be light.  Switch 5 4 3 2 1 0 1 0 0 0 0 0    54.69 $\mu$ sec    Darkest   1 1 0 0 0 1    25.17 $\mu$ s 1 1 0 0 0 0    26.91 $\mu$ s 1 0 1 1 1 1    28.65 $\mu$ s 1 0 1 1 1 0    30.38 $\mu$ s 1 0 1 1 0 1    32.12 $\mu$ s   1 1 1 1 1 1    0.87 $\mu$ s    Lightest
4	0		
3	0		
2	0		
1	0		
0	0		

## Unique Switch f:7- Printer

Switch	Initial Setting	Adjust	Usage/Comments
7	0	Transfer voltage adjustment	Switch 7 6 5 4 3 2 1 0 0 0 0 0 1 0 1 0    +1000 V   0 0 0 0 0 0 1 0    +200 V 0 0 0 0 0 0 0 1    +100 V 0 0 0 0 0 0 0 0    Standard voltage 1 0 0 0 0 0 0 1    - 100 V 1 0 0 0 0 0 1 0    - 200 V   1 0 0 0 1 0 1 0    - 1000 V
6	0		
5	0		
4	0		
3	0		
2	0		
1	0		
0	0		

## Unique Switch f:8 and f:9 – Factory use only

## Unique Switch g:0 - Remote reception

Switch	Initial Setting	Adjust	Usage/Comments
7	0	Factory use only	
6	0	Factory use only	
5	0	Factory use only	
4	0	Factory use only	
3	1	Factory use only	
2	0	Use numeric keypad on the fax using second phone 0: No 1: Yes	Determines if using the numeric keypad on the control panel of the fax using the second phone.
1	1	Manual transmit/receive using Start key after off-hook of second phone 0: No 1: Yes	Determines if transmitting or receiving manually using Start key after off-hook of the second phone.
0	0	Silent detection 0: No 1: Yes	Enables or disables silent detection during Ans/Fax Ready mode.

## Unique Switch g:1 ~ g:6 — Factory use only

## Unique Switch g:7 – Remote reception and TAD interface

Switch	Initial Setting	Adjust	Usage/Comments
7	0	Factory use only	
6	0	Factory use only	
5	0	Strict condition of CNG detection after OGM output 0: No 1: Yes	When set at "1", the condition of CNG detection becomes strict. CNG should be detected 2times continuously and the OFF time should be 2~4 sec.
4	0	CNG detection during OGM output in ANS Ready 0: Yes 1: No	
3	0	Number of detection DTMF	Sets the number of detection the DTMF during Ans/Fax Ready mode.  Switch 3 2 1 0    Number of detection 0 0 0 0    Not detect 0 0 0 1    1 0 0 1 0    2 0 0 1 1    3    Initial setting 0 1 0 0    4 0 1 0 1    5 0 1 1 0    6 0 1 1 1    7 1 0 0 0    8 1 0 0 1    9 1 0 1 0    10   1 1 1 1    15
2	0		
1	1		
0	1		

## Unique Switch g:8 ~ g:9 — Factory use only

### Unique Switch h:0 - Operation

Switch	Initial Setting	Adjust	Usage/Comments
7	0	First Dialing symbol when pressing Dialing Options key 0: “_” 1: “-!”	When set to “0”, “_” will appear first when pressing Dialing Options key. When set to “1”, “-!” will appear first.
6	1	LCD error message 0: Remains in LCD 1: Returns to standby	After an error message has printed, the setting of this switch determines if the error message will remain in the display.
5	1	Buzzer/keypad volume OFF Low Medium Maximum	
4	0	0 0 1 1 0 1 0 1	
3	0	Priority of Speed Dial / Tel Index key 0: Speed Dial 1: Tel Index	When set to “0”, Speed Dial index will appear first when pressing Speed Dial / Tel Index key. When set to “1”, Tel Index will appear first.
2	0	Factory use only	
1	0	Factory use only	
0	0	Factory use only	

### Unique Switch h:1 - Operation

Switch	Initial Setting	Adjust	Usage/Comments
7	0	Factory use only	
6	0	Factory use only	
5	1	Factory use only	
4	0	Factory use only	
3	0	Factory use only	
2	0	Factory use only	
1	0	RX document to polling document 0: No 1: Yes	Retrieve the document received in the memory by polling transmission.
0	0	Factory use only	

## Unique Switch h:2 — Factory use only

### Unique Switch h:3 - Operation

Switch	Initial Setting	Adjust	Usage/Comments
7	0	Priority of consumable order sheet printing 1: Print immediately 0: Print after the current printing job completed	When the drum cartridge has reached its design life, or the toner cartridge is empty, the machine prints a consumable order sheet (see unique switch H:3). When this switch is set at "0", the machine does not print consumable order sheet until the current printing job is finished.
6	0	Print consumable order sheet (drum) 0: No 1: Yes	When the drum cartridge has reached its design life, print the consumable order sheet out.
5	0	Print consumable order sheet (toner) 0: No 1: Yes	When the toner cartridge is empty, print the consumable sheet out.
4	0	Factory use only	
3	0	Factory use only	
2	0	Factory use only	
1	0	Auto answer On/Off can be selected for Soft key 0: No 1: Yes	When set to "1", Auto answer On/Off function will be added to the functions which can be registered in Soft keys.
0	0	Factory use only	

### Unique Switch h:4 - Operation

Switch	Initial Setting	Adjust	Usage/Comments
7	0	Factory use only	
6	0	Factory use only	
5	0	Factory use only	
4	0	Factory use only	
3	0	Security reception after printing Security Rx document 0: Inactive 1: Active	When set to "1", the security reception function keeps to be active even after printing the security reception documents.
2	1	The time for going back to Sleep mode after printing received document 0: immediately 1: after spending specified time	When set to "0", the machine will immediately go back to the sleep mode after printing received document. When set to "1", it is after spending specified time as the machine goes in the sleep mode normally.
1	0	The transmission time on TCR 0: Print 1: Blank	Determine if the transmission time will be printed on the TCR or will be blank.
0	1	Factory use only	

### Unique Switch h:5 ~ i:6 — Factory use only

## Unique Switch i:7 - Miscellaneous

Switch	Initial Setting	Adjust	Usage/Comments
7	0	Factory use only	
6	0	Factory use only	
5	0	Factory use only	
4	0	Factory use only	
3	0	Factory use only	
2	0	Factory use only	
1	0	Factory use only	
0	0	Print last 25-digit of remote number on TCR 0: No 1: Yes	Determines if printing the “••”, followed by the last 25-digit of remote number on TCR, when the remote number exceeded the ability of its column on TCR.

## Unique Switch i:8 ~ j:3 — Factory use only

### Unique Switch j:4 - RS-232C . . . for RS-232C only

Switch	Initial Setting	Adjust	Usage/Comments
7	0	Adjusts CI counter	If the remote fax machine disconnects the phone line before the PC responses the CI signal, the fax regards that the PC is off and then it will receive from the next call. In this case, increase the CI counter to be more than the number of rings the PC receives.
6	1		Switch 3210    CI counter 0000    0 time 0001    1 time 0010    2 times : <u>0101    5 times</u> ← Initial setting : 1110    14 times 1111    15 times
5	0		
4	1		To reset this status, first initialise the PC's fax software and then the fax machine (press <b>Program key, R, 3, ENTER</b> ; see operating instructions for more detail).
3	0		Factory use only
2	0	Factory use only	
1	0	Fax reception while scanning or printing through the RS-232C 0: No 1: Yes	Determines if reject the fax reception or receiving it instead of the PC, while the PC scans or prints through the RS-232C.
0	0	Factory use only	

## Unique Switch J:5 - Miscellaneous

Switch	Initial Setting	Adjust	Usage/Comments
7	0	Factory use only	
6	0	Factory use only	
5	0	Factory use only	
4	0	Factory use only	
3	0	Factory use only	
2	0	Priority of Printing the Check message on A5(Portrait) 0: No 1: Yes	When set to "1", A5(Portrait) sized paper will be given priority to print the check message.
1	0	Paper size of F4-sized paper	Set the paper size of F4-sized paper.  Switch 1 0 Paper size (Width × Length) 0 0 210 mm × 330 mm (Initial setting) 0 1 216 mm × 342 mm 1 0 216 mm × 353 mm
0	0		

## Unique Switch j:6 ~ j:9 — Factory use only

## 3.8 Printer maintenance mode

In case of followings, use this mode.

- When replaced the Fuser unit or Transfer roller.
- When “Please Call Service” message appear in the LCD, access this mode to determine the cause of the “Please Call Service” error message.

☐ *When you replace the Fuser unit or Transfer roller, you must set the count of replacement manually*

To access the printer maintenance modes:

**Note:** Do not set the these counters if you did not replace the Fuser unit or Transfer roller.

1. Press **Program key**, \*, **6**.

The mode is contained within two main menu level.

Set Replace Counter  
◀/▶/Enter

Service Call  
◀/▶/Enter

2. Press ▶ until “Set replace counter” appears in the LCD and then press **ENTER**.

3. The LCD shows:

Replace Fuser  
◀/▶/Enter

4. If you replaced the fuser unit, press **ENTER** and then skip to step 7.

5. If you replaced the transfer roller, press ▶.

The LCD shows:

Replace Transfer  
◀/▶/Enter

6. Press **ENTER**.

7. Press **STOP** to exit this mode.

☐ *When “Please Call Service” message is displayed in the LCD*

To access the printer maintenance modes for determine the cause of the “Please Call Service” error message.

1. Press **Program key**, \*, **6**.

The mode is contained within two main menu level.

Set Replace Counter  
◀/▶/Enter

Service Call  
◀/▶/Enter

2. Press ▶ until “Service Call” appears in the LCD and then press **ENTER**.



3. The kind of printer error will be displayed. If happens two or more troubles, the number of troubles is displayed on the right upper of the LCD. For example, when "Heater error" and "Drum Fuse Error" has occurred, the LCD shows 2.

Service Call	:2	← How many troubles
Heater Error		

4. Press **▶** to show the other printer error.

5. Press **STOP** to exit this mode.

**Note:** See page 4-21 for the printer error messages and an explanation of each are outlined.

## 3.9 Print Service Report

This mode causes the machine to print a several status of the machine. To print the program mode list press **Program key**, \*, 7. After printing the unit will return to standby.

Service Report
** Printing **

## 3.10 Print Program Mode List

This mode causes the unit to print a summary list of the unit's programming modes. To print the program mode list press **Program key**, \*, 8. After printing the unit will return to standby.

Program List
** Printing **

## 3.11 Test Modes

This mode offers the ability to print a test pattern and monitor certain unit output functions. Included are followings.

1. Press **Program key**, \*, 9 to enter the test mode.

Press **▶** to scroll through the test modes.

Life Monitor
◀/▶/Enter

Printer Test
◀/▶/Enter

Feeder Test
◀/▶/Enter

BackgroundLevel Test
◀/▶/Enter

Set Background Level
◀/▶/Enter

2. Press **ENTER** to entry the desired test mode.

### 3.11.1 Life Monitor

The life monitor displays the current software version, the total number of pages scanned, printed, and transmitted, the number of drums replaced and the total page count on the current drum.

**Note:** The All RAM Clear setting does not clear the life monitor. To clear, see below.

1. Press **Program key, \*, 9, ENTER**.

Life Monitor

2. Press **One-touch A-D** to select the desired display. Press **STOP** to exit the test mode.

The following options are available:

- **One-touch A** = displays software version
- **One-touch B** = displays machine's serial number
- **One-touch C** = displays date of installation
- **One-touch D** = displays total pages scanned
- **One-touch E** = displays total pages printed
- **One-touch F** = displays total pages transmitted
- **One-touch G** = displays drum replaced
- **One-touch H** = displays total pages printed on current drum
- **One-touch I** = displays toner replaced count
- **One-touch J** = displays toner life
- **One-touch K** = displays fuser replaced count
- **One-touch L** = displays fuser life
- **One-touch M** = displays transfer roller replaced count
- **One-touch N** = displays transfer roller life
- **One-touch O** = displays drum operation time (sec)
- **One-touch P** = displays printer operation time (sec)

If One-touch A is selected, you'll see the following message on the LCD.

Board Number?

Use the numeric keypad to select the optional board number as shown in the following table.

ROM	Numeric keypad
Flash ROM on Main control PCB	0
Built-in CPU ROM	* (asterisk)

The software version of each board will be shown on the LCD.


Board Number?  
0:D88L EUR A0A0A0

The most left character on the lower line shows the board number selected.

Press **STOP** to exit the test mode

### 3.11.2 Printer Test

The Printer Test mode offers seven different test patterns as shown below.

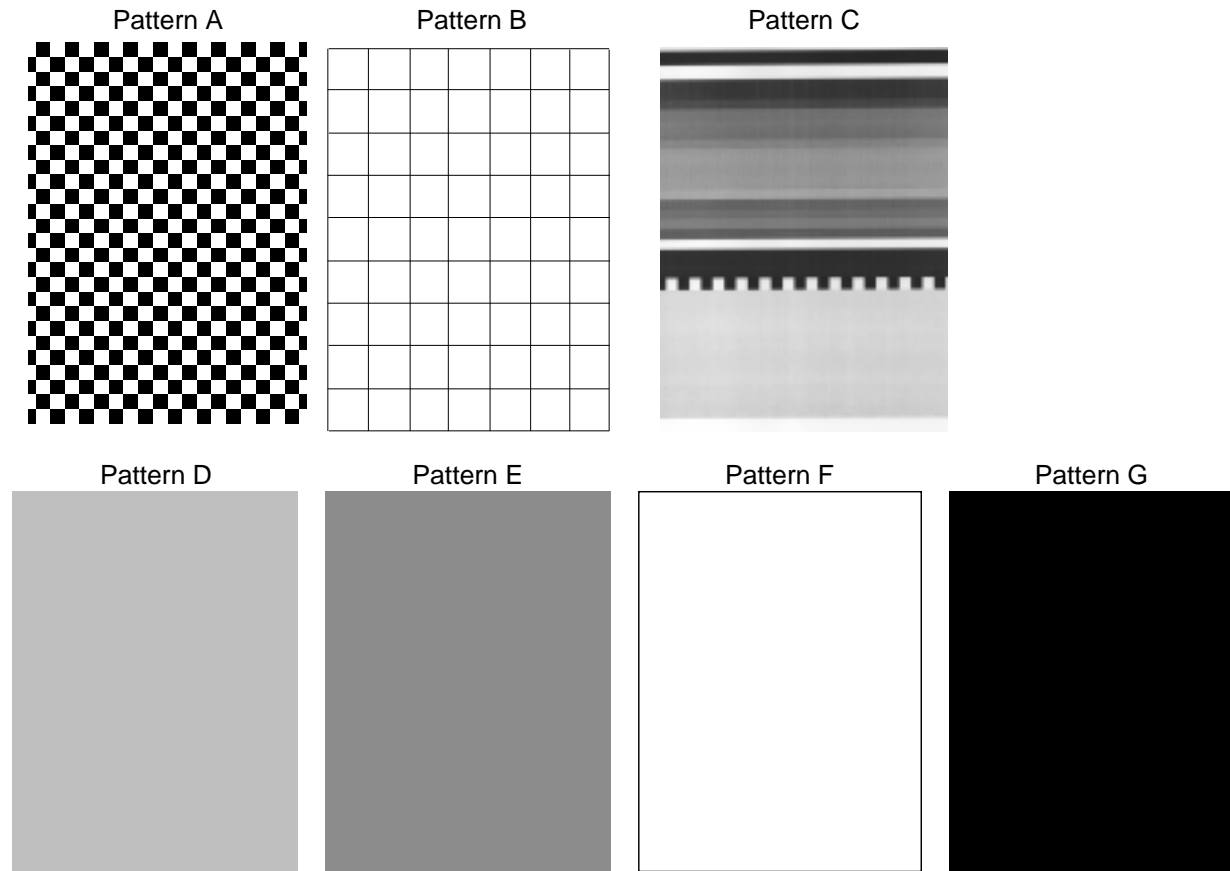

1. Press **Program key**, \*, 9, ►, then press **ENTER**.

Pattern

2. Press One-touch **A, B, C, D, E, F or G** to select the desired pattern.

Pattern A  
\*\* Printing \*\*

The selected pattern will print continuously.

**Note:** Press **STOP** to cancel the printing.

3. To select another pattern, repeat the step 2. Otherwise, proceed to step 4.  
Or press **STOP** to exit the printer test mode.
4. Press **STOP** to return to standby.

### 3.11.3 Feeder test

The feeder test discharges all documents in the automatic document feeder at a constant speed and displays the document total in the LCD.

1. Load test documents into the automatic document feeder.
2. Press **Program key**, \*, 9, ► two times, then press **ENTER**.

Feeder Test

3. Press **START** to start the feeder test.
4. Press **STOP** to exit the test mode.

### 3.11.4 Background Level Test

This is the test mode for the background level only for the factory use. This is not applicable to field service of this machine.

1. Press **Program key**, \*, 9, ► three times, then press **ENTER**.

BackgroundLevel Test  
\*\* Complete \*\*

### 3.11.5 Set Background Level

The background level is an established threshold used to help measure the reflective ability of a scanned document. This threshold can change if the scanner lamp, CCD, or the ballast is replaced; therefore this mode should be used to reset the threshold when these items are changed.

The Set Background Level mode allows the level to be set without erasing memory contents.

**Note:** The background seal at the inside of the scanner cover should be cleaned prior to setting the background level to ensure an accurate reading.

1. Press **Program key**, \*, 9, ► four times, then press **ENTER**.

Set Background Level  
\*\* Complete \*\*

## 3.12 Print Machine Parameters, Memory Switch and Unique Switch Settings

This function instructs the unit to print a list of the machine parameter, memory switch and unique switch settings. The list shows the default and current settings for each. After printing, the unit returns to standby.

1. Press **Program key**, \*, **A(01)**.

Memory Switch  
\*\* Printing \*\*

## 3.13 Factory Functions

This factory functions provide several machine testes including LED and LCD tests, a keypad test, memory tests, a RTC test, and optional RS-232C test port test.

1. Press **Program key**, \*, **B(02)**.

Factory Function

2. To select the desired test mode, press **One-touch A(01)-H(08)** as indicated in the following list.

(A detailed explanation of each mode follows this list.)

- **One-touch A(01)** = Prints a list of the Factory Functions
- **One-touch B(02)** = LED test
- **One-touch C(03)** = LCD test
- **One-touch D(04)** = Key Panel test
- **One-touch E(05)** = SRAM check
- **One-touch F(06)** = DRAM check
- **One-touch G(07)** = RTC test
- **One-touch H(08)** = RS-232C port test (optional RS-232C port required)

### 3.13.1 Function List

Press **Program key**, \*, **B(02)**. Then press **One-touch A(01)**. A list of the Factory Functions will print. After printing the unit will return to standby.

### 3.13.2 LED Test

1. Press **Program key**, \*, **B(02)**. Then press **One-touch B(02)**.

Pressing **START** once, all green LEDs will turn on.

Pressing **START** twice, all red LEDs will turn on.

Pressing **START** three times, all LEDs will turn on.

2. Press **STOP** to exit the test mode.

### 3.13.3 LCD Test

This mode displays two test patterns in LCD.


1. Press **Program key**, \*, **B(02)**. Then press **One-touch C(03)**.

LCD Test

Pressing **START**, all dots turn on.



Next pressing **START**, all dots turn off.



Finally pressing **START**, the alphabetical characters are shown in the LCD.

ABCDEFGHIJKLMNOPQRSTUVWXYZ  
UVWXYZabcdefghijklmnopqrstuvwxyz

2. Press **STOP** to exit the test mode.

### 3.13.4 Key Panel Test

1. Press **Program key**, \*, **B(02)**. Then press One-touch **D(04)**.

Key Panel Test

2. As each button on the keypad is pressed, a representative name as show in the following table will be displayed.

Key	Indication in LCD	Key	Indication in LCD
DOCUMENT RESOLUTION	Document/Resolution	COPY RESET	Copy Reset
CONTRAST	Contrast	START	Start
DOCUMENT SIZE	Doc Size	STOP	Stop
PAPER SIZE NEXT DOC	Paper Size/Next Doc	Soft key 1 and 2	Soft Key 1 and 2
CANCEL	Cancel	REDIAL/PAUSE	Redial
ENTER	Enter	DIALING OPTIONS	Dialing Op.
◀	◀	BROADCAST	Broadcast
▶	▶	GROUP	Group
▲	▲	ADVANCED FUNCTIONS	Advanced Functions
▼	▼	Macro keys	M1 and M2
P (Program key)	Program	Numeric keys 0 through #	0 through #
SPEED DIAL /TEL INDEX	Speed	One-touch keys 01 through 55	[01] through [55]
REVIEW COMMANDS	Review Command	Programmable One-touch keys P1 and P2	[P1] and [P2]

3. Press **STOP** twice to cancel the key panel test.

### 3.13.5 SRAM Check

This mode is used to test the SRAM memory where user programmed parameters such as date, time, TTI, etc are stored.

**Note:** When this test is executed, an All RAM Clear will be performed by the unit.

The All RAM Clear erases all user settings and resets all memory switches, machine parameters and unique switches to factory defaults.

1. Press **Program key, \*, B(02)**. Then press One-touch **E(05)**.

SRAM Check  
Enter/Stop

2. Press **ENTER**.

**Note:** To finish the operation without performing SRAM check, press **STOP**.

The data are written to, then read from, each address. The results are shown in the display. If the read/write test is successful the display will show "OK".

SRAM Check  
OK

If some portion of the read/write test fails the display will show "NG" with the address and the data name.

SRAM Check  
NG     00700100H:0000H

3. Upon completion, press any key to return to the standby mode.

### 3.13.6 DRAM Check

This mode is used to test the DRAM memory, or document memory.

**Note:** When this test is performed, an All DRAM Clear will be performed by the unit. The All RAM clear erases all user settings and resets all memory switches, machine parameters and unique switches to factory defaults.

This is a read/write test that requires a few moments to complete.

**Note: Perform a DRAM test whenever a memory upgrade is added to the unit.**

1. Press **Program key, \*, B(02)**. Then press One-touch **F(06)**.

DRAM Check

2. Depending on the amount of DRAM in the unit, press **0, 1, 2, 3**, or **4** on the numeric keypad.  
Please refer to the following table:

**Note:** Usually, press "**0**".

Press	Check area
0	All DRAMs
1	The DRAM on the Main PCB
2	The 8MB Optional Memory PCB (MFX-1200) or The first 8MB DRAM on the 24MB Optional Memory PCB (MFX-1600)
3	The second 8MB DRAM on the 24MB Optional Memory PCB (MFX-1600)
4	The third 8MB DRAM on the 24MB Optional Memory PCB (MFX-1600)

Then press **START**.

The machine starts checking and the result(OK/NG) will be shown in the display.  
For example, if the check area is "0" and one additional memory, you will see:

DRAM Check	
OK:12	NG:

3. Press **STOP** to exit the test mode.

### 3.13.7 RTC(real time clock) Test

This test mode is not applicable to field service of this machine.

### 3.13.8 RS-232C Test

This mode is used to return back test of the optional RS-232C port.

1. Connect a special return back test connector with RS-232C interface connector.

1. Press **Program key, \*, B(02)**. Then press **One-touch H(08)**.

RS232C Test
-------------

2. Enter **One-touch A (01)**, depending on the kind of test. Please refer to the following table:

**A (01):** return back test

The results are shown in the display.

If the test is successful, the display will show "OK"

RS232C Test
OK

If the test is failed, the display will show "NG".

RS232C Test
NG

3. Press **STOP** to exit the RS-232C test mode and return to standby mode.



## 3.14 Line Tests

This mode offers several internal tests and ability to monitor certain unit output functions. Included are relay tests, modem signal output monitoring, and DTMF output monitoring.

1. Press **Program key, \*, C(03)** to enter the test mode.

The tests are contained within three main menus.

Relay Test

Tonal Test 1

Tonal Test 2

DTMF Test

### 3.14.1 Relay Test

This mode tests the on/off operation of various relays and switches.

1. Press **Program key, \*, C (03)**.

Board Number?

2. Press the numeric keypad 0 (zero) to select the optional board number for the fax unit.

To select the optional board number for the second phone line, press 1 (one).

Relay Test

3. Press **ENTER**. A list of abbreviations representing the various relays and switches will appear in the display.

CML H L DP S  
C24 TONE BZ RI

4. The one-touch keys are used to toggle the various relays and switches on and off as outlined on the following table. When a relay or switch is turned on, an asterisk(\*) will appear to the left of the item's abbreviation in the LCD. For example, pressing **One-touch A(01)** turns the CML relay on. An asterisk appears to the left of CML in the display.

To turn the CML relay off, press **One-touch A(01)** again and an asterisk disappears in the display.

\*CML H L DP S  
C24 TONE BZ RI

Press the corresponding one-touch key to toggle the test item on or off.

One-touch key	Test function	One-touch key	Test function
A (01)	CML relay – on/off	E (05)	CONT24V relay – on/off
B (02)	H and L relay – on/off	F (06)	Disable
C (03)	Disable	G (07)	BZ relay – on/off
D (04)	S relay – on/off	H (08)	Disable

Press **STOP** to exit the relay test mode.

5. Press **STOP** again to return to standby mode.

### 3.14.2 Tonal Signal Test

The tonal signal test permits the unit's output tones to be monitored.

**Note:** To monitor the tones, an external monitoring device must be connected to the telephone line jack.

1. Press **Program key, \*, C (03)**.

Board Number?

2. Press the numeric keypad 0 (zero) to select the optional board number for the fax unit.  
To select the optional board number for the second phone line, press 1 (one).

Relay Test

3. Press **►** once(Tonal Test 1) or twice(Tonal Test 2) to select your desired tonal signal test, then press **ENTER**.

**Note:** Regarding the Tonal Test 1 and 2, refer to the table in next step.

Tonal Test 1

4. To output a desired tonal signal, press the corresponding numeric key and one-touch key as shown in the following table. For example, to monitor the 2100 Hz CED tone, press numeric key **9**. The output signal will begin. A different output signal can be selected by pressing corresponding numeric key and one-touch key.

**Note:** It may take several moments for output signal to change.

Numeric key	Signal	Numeric key	Signal
1	None (stop signal)	7	1800 Hz tone
2	462 Hz tone	8	1850 Hz tone
3	1080 Hz tone	9	2100 Hz tone
4	1300 Hz tone	*	FSK white (all 0)
5	1650 Hz tone	#	FSK black (all 1)
6	1700 Hz tone	0	FSK W1 : B1

**Tonal Test 1**

One-touch key	Signal rate	Symbol rate	Data rate
01	V.27ter	1200 baud	2400 bps
02		1600 baud	4800 bps
03	V.29	2400 baud	7200 bps
04			9600 bps
05	V.17	2400 baud	7200 bps
06			9600 bps
07			12000 bps
08			14400 bps
09	V.34	2400 baud	2400 bps
10			4800 bps

**Tonal Test 2**

One-touch key	Signal rate	Symbol rate	Data rate
01	V.34	3000 baud	4800 bps
02			7200 bps
03			9600 bps
04			12000 bps
05			14400 bps
06			16800 bps
07			19200 bps
08			21600 bps
09			24000 bps
10			26400 bps

11		7200 bps	11		28800 bps
12		9600 bps	12	3200 baud	4800 bps
13		12000 bps	13		7200 bps
14		14400 bps	14		9600 bps
15		16800 bps	15		12000 bps
16		19200 bps	16		14400 bps
17		21600 bps	17		16800 bps
18	2800 baud	4800 bps	18		19200 bps
19		7200 bps	19		21600 bps
20		9600 bps	20		24000 bps
21		12000 bps	21		26400 bps
22		14400 bps	22		28800 bps
23		16800 bps	23		31200 bps
24		19200 bps	24	3429 baud	4800 bps
25		21600 bps	25		7200 bps
26		24000 bps	26		9600 bps
27		26400 bps	27		12000 bps
			28		14400 bps
			29		16800 bps
			30		19200 bps
			31		21600 bps
			32		24000 bps
			33		26400 bps
			34		28800 bps
			35		31200 bps
			36		33600 bps
			37		Voice

**Note:** V.34 is available only for MFX-1600.

5. The black and white ratio of the 2400-14400 bps picture data output (using **One-touch key A(01)-H(08)**) can be changed by pressing the numeric key as shown in the following table.

Numeric key	White:Black pattern
1	White 1 : Black 0
2	White 1 : Black 1
3	White 1 : Black 4
4	White 0 : Black 1
5	White 4 : Black 1

6. To stop outputting the tonal signal, press **STOP**.

7. To select another tonal signal, repeat steps 4-6.  
Otherwise, proceed to step 8.
8. To exit the tonal signal test mode, press **STOP** under not tests.
9. Press **STOP** again to return to standby mode.

### 3.14.3 DTMF Output Test

The DTMF output test permits the unit's DTMF tones to be monitored.

**Note:** To monitor the tones, an external monitoring device must be connected to the telephone line jack.

1. Press **Program key, \*, C (03)**.

Board Number?

2. Press the numeric keypad 0 (zero) to select the optional board number for the fax unit.  
To select the optional board number for the second phone line, press 1 (one).

Relay Test

3. Press **▶** three times to select the DTMF output test, then press **ENTER**.

DTMF

4. Pressing a button on the numeric key or one-touch key will produce DTMF tones according to the following table.

Numeric key	Signal	One-touch key	Signal
0	DTMF 0 (941 Hz + 1336 Hz)	A (01)	ROW 1 (697 Hz)
1	DTMF 1 (697 Hz + 1209 Hz)	B (02)	ROW 2 (770 Hz)
2	DTMF 2 (697 Hz + 1336 Hz)	C (03)	ROW 3 (852 Hz)
3	DTMF 3 (697 Hz + 1477 Hz)	D (04)	ROW 4 (941 Hz)
4	DTMF 4 (770 Hz + 1209 Hz)	E (05)	COL 1 (1209 Hz)
5	DTMF 5 (770 Hz + 1336 Hz)	F (06)	COL 2 (1336 Hz)
6	DTMF 6 (770 Hz + 1477 Hz)	G (07)	COL 3 (1477 Hz)
7	DTMF 7 (852 Hz + 1209 Hz)	E (08)	COL 4 (1633 Hz)
8	DTMF 8 (852 Hz + 1336 Hz)		
9	DTMF 9 (852 Hz + 1477 Hz)		
*	DTMF * (941 Hz + 1209 Hz)		
#	DTMF # (941 Hz + 1477 Hz)		

5. To stop outputting the DTMF tone, press **STOP**.
6. To select another DTMF tone, repeat steps 4-5.  
Otherwise, proceed to step 7.
7. To exit the DTMF output test, press **STOP** under not tests.
8. Press **STOP** again to return to standby mode.

## 3.15 Mirror Carriage Transfer Mode

**Important:** The fax's mirror carriage is fixed using the four screws at transferring.

When installing the fax, remove the four mirror carriage mounting screws and turn the power on. Then perform this mode.

1. Press **Program key**, \*, **E(05)**.

Mirror Locked :On  
◀/▶/Enter

2. Press ▶ to change the setting is "OFF" and then press **ENTER**.

**Important:** If reshipping, turn on this mode to move the mirror carriage to the transport position. Then mount the mirror carriage using four transport screws.

## 3.16 Consumable order sheet

When the drum cartridge has reached its design life or the toner cartridge is empty, the machine prints the consumable sheet.

**Note:** This feature's default setting is OFF (not print the consumable sheet). (See Unique Switch H:3 to set ON this feature.)

### 3.16.1 Set consumable order sheet

If using this feature, you should be enter following items:

- Distributor's name
- Customer's name
- Customer's phone number
- Customer's address
- Customer's code
- Fax machine's serial number

Here's how:

1. Clear the junk data, if necessary (see "Clear consumable order sheet," next page).

2. Press **Program key**, \*, **F(06)**.

Set Order Sheet  
◀/▶/Enter

3. Press **ENTER**. the LCD will show:

DIST NAME :Upper  
—

Enter the distributor's name. The name may be up to 30 characters in length.

You enter letters and other non-numeric characters through the one-touch keys.

To word "Upper" means the machine will enter only upper-case letters. If you press **R**, the machine will see set it as an R (not an r).

To type a lower-case letter, press **ALPHABET**.

To switch back for upper-case entries, press **ALPHABET**.

To enter spaces, punctuation and symbols, use the characters shown on the one-touch keypad you want.

**Note:** If you make a mistake, press **CANCEL** to erase to the left. To change just one character, press ◀ to move left, or ▶ to move right. Press **CANCEL** to erase the character. Then re-enter the character correctly.

4. Press **ENTER** to save the distributor's name and continue. The LCD will show:

CUST CODE ;Upper
—

Enter the customer's code. The customer's code may be up to 10 characters in length.

5. Press **ENTER** to save the customer's code and continue. The LCD will show:

CUST NAME ;Upper
—

Enter the customer's name. The customer's name may be up to 30 characters in length.

6. Press **ENTER** to save the customer's name and continue. The LCD will show:

Address1 ;Upper
—

Enter the customer's address for the upper row. The customer's address may be up to 30 characters in length.

7. Press **ENTER** to save the customer's address and continue. The LCD will show:

Address2 ;Upper
—

Enter the customer's address for the Lower row. The customer's address may be up to 30 characters in length.

8. Press **ENTER** to save the customer's address. The LCD will show:

Customer's Tel
—

Enter the customer's phone number. The phone number may be up to 20 characters in length.

9. Press **ENTER** to save the customer's phone number and continue. The LCD will show:

Serial No. ;Upper
—

Enter the fax machine's serial number. The number may be up to 18 characters in length.

10. Press **ENTER** to save the fax machine's serial number.

### 3.16.2 Print consumable order sheet

To check the customer's information has been registered correctly, print the consumable order sheet.

1. Press **Program key, \*, F(06)**.

Set Order Sheet
◀/▶/Enter

2. Press **▶, ▶**.

Print Order Sheet
◀/▶/Enter

3. Press **ENTER** to print the consumable order sheet.

### 3.16.3 Clear consumable order sheet

The consumable order sheet keeps several items, these are **not** clear the all RAM clear function (Program key, \*, 3). To clear the information of consumable order sheet:

1. Press **Program key, \*, F(06)**.

Set Order Sheet
◀/▶/Enter

2. Press ►.

Reset Order Sheet
◀/▶/Enter

3. Press **ENTER**.

Reset Order Sheet
Check Enter/Cancel

4. To clear the information of consumable order sheet, press **ENTER**.  
To finish the operation without clearing, press **CANCEL**.

## 3.17 DRAM Clear

**Note:** Perform a DRAM clear whenever a memory upgrade is installed to the unit or the DRAM is replaced.

1. Press **Program key, \*, G (07)**.

DRAM Clear
Check Enter/Stop

2. Press **ENTER**. The DRAM will be cleared.

**Note:** To finish the operation without performing initialization, press **STOP**.

## 3.18 Clear Life Monitor

The life monitor keeps a count of the pages scanned, printed, and transmitted, along with the drum replacement count and total pages printed on the current drum. This mode clears these counters.

1. Press **Program key, \*, H (08)**.

Clear Life Monitor
Check Enter/Cancel

2. Press **ENTER**. The counters will be reset.

**Note:** To finish the operation without performing initialization, press **CANCEL**.

## 3.19 Clear Optional Data

This mode clears all data and all activity journals for optional RS-232C, Printer controller and second phone line.

**Note:** Second phone line is available only for the MFX-1600.

1. Press **Program key, \*, I (09)**.

Option Data Initial
Check Enter/Cancel

2. Press **ENTER**. The optional data will be cleared.

**Note:** To finish the operation without performing initialization, press **CANCEL**.

## 3.20 Set Service Code

This is the code which, one can protect the life monitor clear operation. If it is not necessary to protect to the life monitor clear operation, abort this operation without entering the service code.

1. Press **Program key, \*, J (10)**.

```
Set Service Code
Old Passcode   :****
_
```

2. Your next mode depends on whether you're creating or modifying the service code:

- If creating — Use the numeric keypad to enter 0000 and press **ENTER**.
- If modifying — Use the numeric keypad to enter the proper service code and press **ENTER**. If you enter an invalid code, the fax will reject the attempt and abort this operation.

3. Use the numeric keypad to enter the four-digit service code.

```
Set Service Code
New Passcode   :1234
_
```

4. Press **ENTER**.

**Note:** To turn off the service code and return to normal life monitor clear (not protect), change the code to 0000 by repeating steps 1-4 and entering 0000 in step 3.

## 3.21 Life monitor maintenance

When you replace the main control PCB, you should register the previous several counter values of the life monitor.

1. Before updating the software or replacing the main control PCB, you must write down the counter values of the life monitor.
2. To confirm the life monitor, press **Program key, \*, 9, ENTER**. Then press **one-touch key D to P**. (See "3.11.1 Life Monitor," page 3-63.)
3. After you write down the counter values of the life monitor, update the software or replace the main control PCB.
4. Then, press **Program key, \*, K(11)**.

```
Drum Replaced Count
0000000000
_
```

5. Enter previous value of the number of drum replaced time, then press **ENTER**.

```
Drum Life
0000000000
_
```

6. Enter previous value of the total pages printed on current drum, then press **ENTER**.

```
Toner Replaced Count
0000000000
_
```

7. Enter previous value of the toner replaced count, then press **ENTER**.

```
Toner Life
0000000000
_
```



8. Enter previous value of the toner life, then press **ENTER**.

```
Fuser Replaced Count
0000000000
_
```

9. Enter previous value of the fuser replaced count, then press **ENTER**.

```
Fuser Life
0000000000
_
```

10. Enter previous value of the fuser life, then press **ENTER**.

```
Transfer Rplcd Count
0000000000
_
```

11. Enter previous value of the transfer replaced count, then press **ENTER**.

```
Transfer Life
0000000000
_
```

12. Enter previous value of the transfer roller life, then press **ENTER**.

```
Drum Life Span
0000000000
_
```

13. Enter previous value of the drum operation time, then press **ENTER**.

```
Mach. Life
0000000000
_
```

14. Enter previous value of the printer operation time, then press **ENTER**.

15. The machine returns to its standby mode.

## 3.22 JP1, JP2 Battery Backup

Jumper JP2 on the main control PCB is used for battery back-up of the DRAM. Any documents stored in DRAM. Removing JP2 will initialize the DRAM. If the power is turned off, the battery will provide up to 72 hours of back-up when fully charged with 8 MB.

Jumper JP1 on the main control PCB is used for battery back-up of the SRAM. All user programmed data and internal machine parameter, memory switch and unique switch settings are held in SRAM. Removing JP1 will initialize the SRAM. If the power is turned off, the battery will provide up to five years of back-up when fully charged.

## 3.23 Update the software

Here's instruction to update the software version of the Flash ROM.

**Important:** To update the software, it needs the flash ROM writer and three of the latest versions of EP-ROMs — ROM0, ROM1 and ROM2.

1. Turn off the power switch.
2. Remove the access cover on the rear cover by removing one screw.
3. Connect the two connectors of the Flash ROM writer to the 14A and 14C on the main control PCB.

**Note:** Make sure the latest versions of ROM0, ROM1 and ROM2 are set to the Flash ROM writer.

4. Turn the power on.
5. The Flash ROM writer erases the current program in the fax machine, then writing the new program to the machine.

```
Flash Mem Write Prog
Erasing...
```

```
ROM0:F112 ROM1:
>>>>>>>>>.....10
```

6. At the end of this operation (it takes a few minutes), the LCD shows the following message or similar:

```
ROM0:F112   ROM1:65A9
ROM2:4E0D   ROM3:0000
```

7. Turn off the power switch.
8. When you finish the upgrading, disconnect the flash ROM writer from main control PCB.
9. Re-attach the small panel on the rear cover.
10. Turn on the power switch.
11. After finishing to update the software, you must perform the “DRAM Clear” by pressing **Program key, \*, G(07)**.

# Section4

## Troubleshooting Procedures

### 4.1 Troubleshooting Outline

**Before troubleshooting a unit check the following:**

- Is the power cord correctly connected to the machine?
- Is the telephone handset and the telephone line cord connected correctly?
- Is there paper in the paper cassette?
- Are all covers closed correctly?

**Before removing any portions of the machine or making any adjustments be sure the power cord is disconnected from the unit. Check the following:**

- The power source should be rated according to unit specifications.
- The unit should not be connected to an electrical circuit with other equipment or where voltages may vary.
- The unit should be installed on a flat, level surface.
- The ambient temperature and relative humidity surrounding the unit should be 50°F to 89.6°F (10°C to 32°C) at 20% to 80% humidity with no condensation.
- The unit should be located in a well ventilated area.
- The unit should receive necessary cleaning and maintenance.

**The unit should be installed:**

- Away from heat sources and heating or cooling vents.
- Away from water heaters, steam generators, humidifiers or other areas of high humidity.
- Away from dusty areas.
- Away from areas where chemical fumes or gasses are generated or may collect.
- Away from areas exposed to direct sunlight.

**Check the consumable:**

- Verify that the recording paper supply is adequate and that it is high- or standard-quality 20lb. xerographic bond.
- Verify that the recording paper has been stored away from moisture and damp areas.
- Verify that the recording paper has not been damaged in any way.

## 4.2 Recording Paper Jam

Symptom: Recording paper did not exit paper cassette properly or jam occurred in print area.

Suggested corrective action:

1. Verify that the recording paper conforms to the type specified for use in the machine and that has not been damaged or exposed to moisture.
2. Make sure the recording paper is properly loaded into the multipurpose tray and cassette and the cassette is properly closed.
3. Clean the paper feed rollers of any paper dust buildup. (Clean using a lint-free cotton cloth moistened with a cleaning designed for use on rubber rollers.) Replace the paper feed rollers if worn or damaged.
4. Check the cassette pressure springs for proper installation and operation.
5. Verify that the paper has reached sensor PSS. If it has, check the operation of PSS.
6. Verify the paper take up roller is turning. If not, check the main motor. If the main motor is turning, check the operation of the paper feed solenoid PFCL.
7. If the main motor does not turn, replace the main motor, the power supply unit or the main control PCB.
8. Check for obstructions in the paper path.

Symptom: Recording paper jammed as it was exiting the unit into receive paper tray.

Suggested corrective action:

1. Check for obstruction in the paper path.
2. Check the paper discharge sensor (PDS) for proper operation.
3. Clean the exit roller using a lint-free cloth moistened with a cleaning solution designed for use on rubber rollers. Replace the exit roller if worn or damaged.
4. Verify the fuser rollers are clean and not damaged. If worn or damaged, replace the fuser.

## 4.3 Document Feeder Jam

Symptom: Original document did not feed into or exit scanner properly, document feeder error message.

Suggested corrective action:

1. Verify the original documents conform to the specifications designed for use in the machine and that they are not damaged in any way.
2. Verify the number of documents placed into the feeder does not exceed its maximum capacity.
3. Verify the scanner cover is closed properly.
4. Remove any foreign substances from inside the scanner area.
5. Verify that all of the document feed rollers are clean and not damaged. Clean using a lint-free cotton cloth moistened with a cleaning solution designed for use on rubber rollers. Replace the rollers if worn or damaged.
6. Check the operation of DS1 at connector P180 301, pins 1-3, on the Connect ADF PCB.
7. Check the operation of the separator roller, and the pick-up roller.
8. Verify the operation to the ADF Motor at connector P180 305, pins 1-4 on the Connect ADF PCB.
9. Verify that the document feeds into the unit and stops. If the document does not stop, check the operation of DS2 at connector P180 302, pins 1-2, on the Connect ADF PCB.
10. Check all connectors and cables.
11. Check the operation of the main control board.

## 4.4 Document Feeder Multi-feeding or Skew

Symptom: Two or more pages of a multi-page document are fed at once.

The document is fed on the skew. Slight skewing may sometimes occur.

Suggested corrective action:

1. Verify that the original documents conform to the specifications designed for use in the machine and they are not damaged in any way.
2. Verify the pages of the document are not stuck together from glue, wet or damp correction fluid, tape, etc.
3. Verify the feed roller, separator roller and retard roller are clean and not damaged. Clean using a lint-free cotton cloth moistened with a cleaning solution designed for on rubber rollers. Replace these items if worn or damaged.

## 4.5 Mirror Carriage Error

Symptom: The mirror carriage doesn't move.

Suggested corrective action:

1. Verify that the mirror carriage locking plate has been released. Release the mirror carriage locking plate if it is not released. Then press **PROGRAM**, **\***, **E** to turn off the mirror carriage carry mode.
2. Check the setting of Unique SW E:2, bit 0-1.
3. Verify that the timing belt doesn't out of joint.
4. Check the operation of HOME sensor at connector P1802, pin 1-3, on the Connect Scanner PCB. (See page 2-2.)
5. Check the operation of END sensor at connector P1804, pin 1-3, on the Connect Scanner PCB. (See page 2-2.)

## 4.6 Transmit Error

Symptom: Check message prints after attempting transmission.

Suggested corrective action:

1. Reference the error code on the check message or the journal to the error code list contained in this section.

## 4.7 Transmit Black Lines

Symptom: A black line appears on all documents transmitted or copied.

Suggested corrective action:

1. Print a document from memory (mode list, journal, etc.) to determine if the problem is in the scanner. If the black line is not on the memory print outs, the problem is not in the scanner.
2. Check for a foreign object in the feeder.
3. Clean the contact glass.
4. Check for wire or other foreign object obstructing the light path to the CCD.

## 4.8 Cannot transmit

Symptom: The unit will not transmit

Suggested corrective action:

1. Verify the telephone line cord is properly installed and plugged into the correct type of wall jack.
2. Check for dial tone at the unit and wall jack. If no dial tone is present at the unit, check the NCU PCB.
3. Verify that the correct telephone number has been dialed or that the correct telephone number is programmed in the autodialer.
4. Insure Security TX turned off.
5. Place a call through the monitor and check for excessive noise or interference on the telephone line.
6. Verify that the remote location is capable of receiving by checking the following:
  - 6.1 Place a call to the remote machine and verify that it auto answers.
  - 6.2 Insure that the remote machine does not have closed network or block junk fax turned on.
  - 6.3 Transmit to another location.
7. Check the operation of NCU PCB and the main control PCB.

## 4.9 Receive Errors

Symptom: Check message prints after attempting a reception.

Suggested corrective action:

1. Reference the error code on the check message or the journal to the error code list contained in this section.

## 4.10 Will not Auto-Answer

Symptom: The unit rings but will not auto-answer.

Suggested corrective action:

1. Check the power cord and AC switch.
2. Verify the telephone line is properly installed.
3. Verify recording paper in the paper cassette.
4. Check the memory capacity. The unit will not answer incoming calls if memory full.
5. Check the number of rings is set to answer on. If set to a high number of rings, the transmitting unit may "time out".
6. Insure the unit is in the Fax Ready mode.
7. Check the operation of the NCU PCB and the main control PCB.

## 4.11 Clearing Jammed Paper

### If the original document jams

1. If an original document jams in the ADF while scanning the document into the memory for faxing or copying, the LCD will show:

Document Jam  
ContStor Enter/Cancel

If you do wish to continue the operation, press **ENTER** and proceed to step 2.

To abort the operation, press **CANCEL**. This will erase from memory all pages stored during this operation, and the machine will return to standby mode.

**Important:** If you wait more than 60 seconds without pressing any key, the machine will erase from memory all pages stored during this operation and the machine will return to the standby mode.

**Note:** If the document jammed in the following case, the following message will appear and the machine will abort the operation anyway; instead, you'll have to perform the job again from scratch.

- The first page of the document jammed
- During the real time transmission or quick memory transmission
- During non-sorting ADF job

Open&Close ScanCover  
Reset Document

Also, the "Repeat transmission. Error on scan at page xx" message will be printed out if the document jammed during transmission.

2. The LCD will show which page (i. e., which page number) is jammed. To continue scanning from the jammed page forward (keeping in mind the Note at the end of step 1, above), press **START** after clearing the jam.


P 2.Reset Document  
Press Start Key

**Note:** If you wait more than 60 seconds without pressing any key, the machine will begin to send or copy the document(s) it has.

If you wish to cancel this operation, press **STOP**. The machine will delete all pages from memory and then return to its standby mode.


## To remove the document:

1. Open the scanner cover.

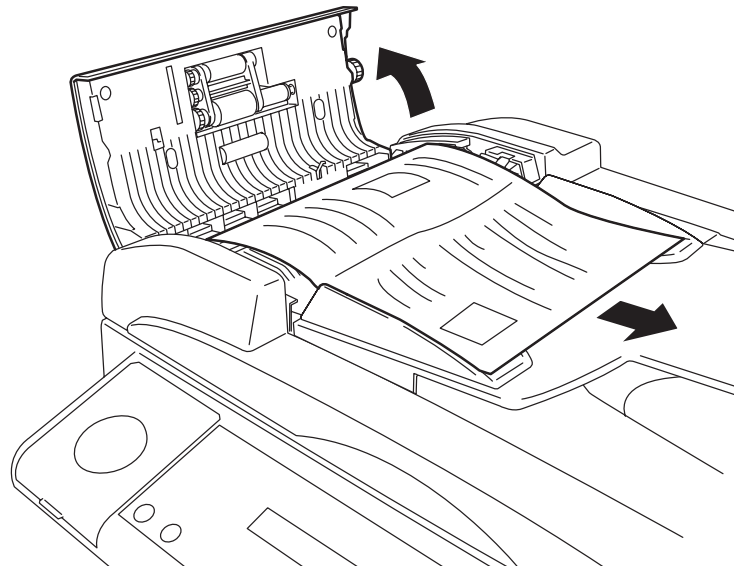

2. Lift the original document from the machine.

**Note:** If you cannot remove the original document, open the inner cover as shown at right, then remove the document.

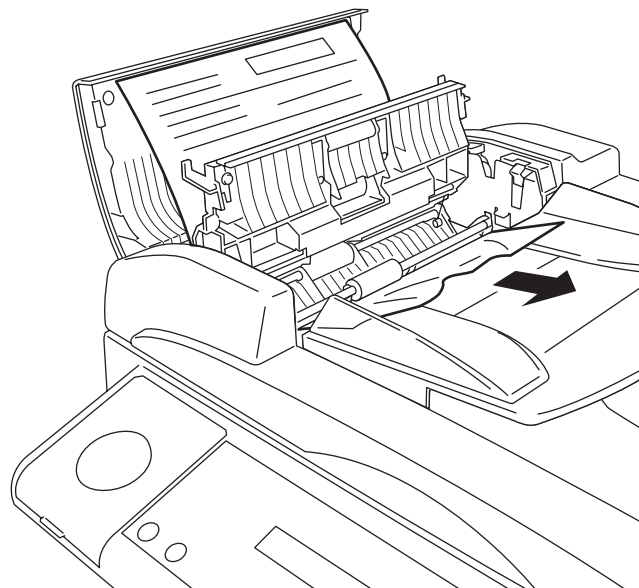

3. Gently close the scanner cover, making sure both sides are snapped down securely.

**Note:** If the original document has become wrinkled or torn, do not re-send it.




## If a printout jams inside your machine


To clear a printout jammed inside your machine:

**Important:** Gently close the top cover so that you don't catch your hands, possibly injuring them.

1. Open the top cover.

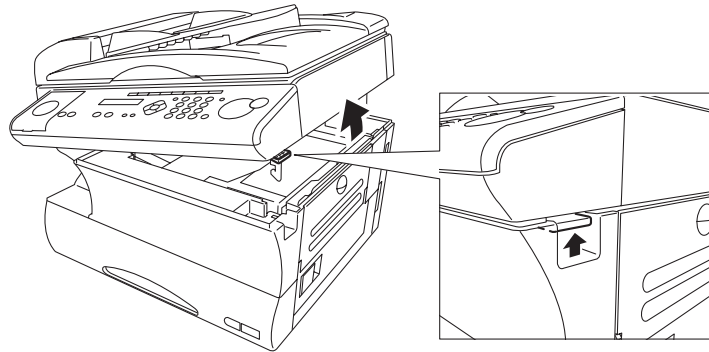


2. Open the printer cover.

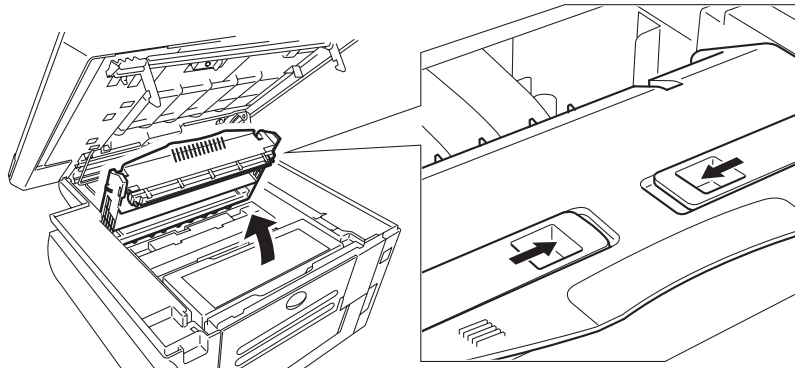

3. Remove the toner and drum cartridge.

**Important:** Shield the drum cartridge from light, especially strong light. Later, if you have to remove the cartridge from the fax, immediately wrap it in a thick cloth to protect it from light.

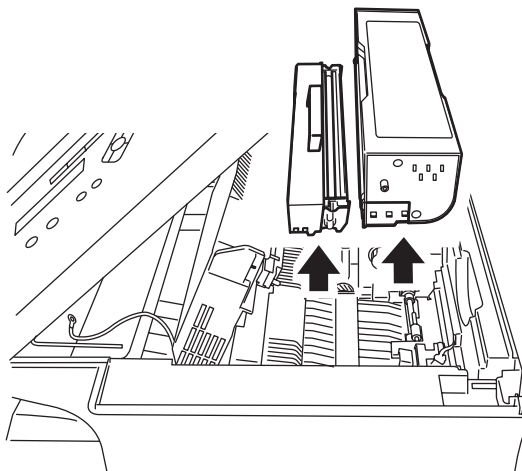


4. Remove the jammed paper.

**Important:** The fuser unit becomes very hot.


Do not touch the fuser unit when you are removing a paper jam.

**Note:** Avoid getting “unfixed” toner on your hands and clothes.

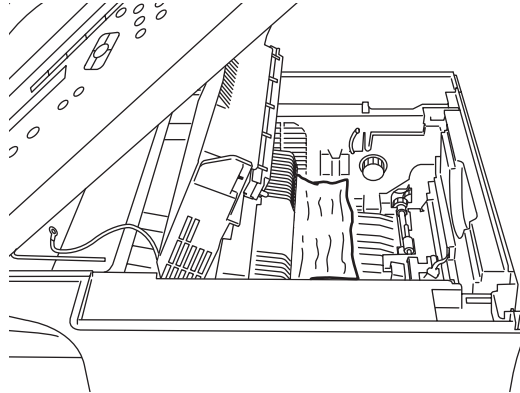


Open the side cover.

Pulling up the jam release lever to remove the jammed paper.

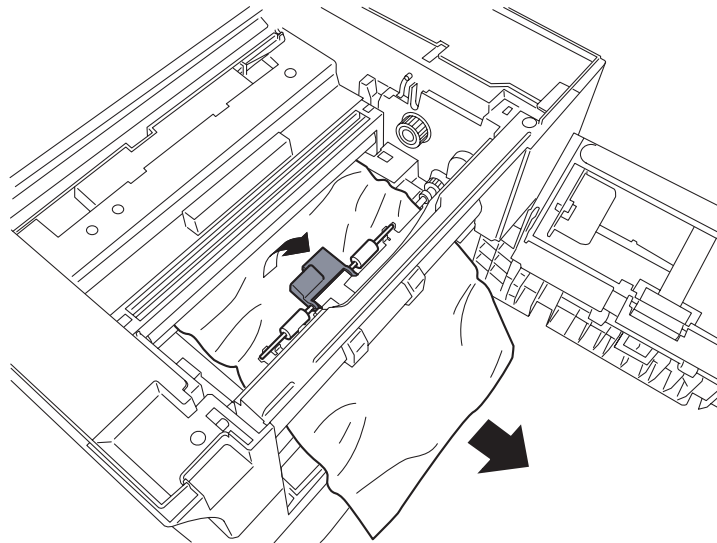

5. Reset the toner and drum cartridge.

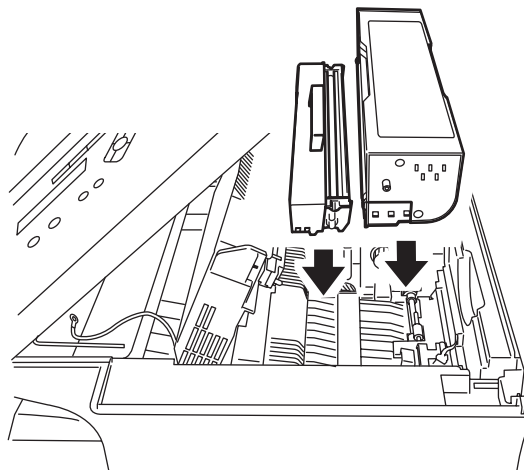

6. Gently close the printer cover.

7. Gently close the top cover, pressing firmly on the both sides of the top cover until you hear it click.

## 4.12. The Image Quality Problems

The following provides guidelines for troubleshooting the printer engine and actions to be taken. Before removing any portions of the machine or making any internal adjustments, be sure power to the unit is OFF. Suggested corrective actions should be performed in order as listed. Most conditions can be corrected by performing routine preventative maintenance steps. If printer or print quality problems occur, check the following.

The unit:

1. Should have the power cord correctly connected.
2. Should be connected to a power source which is rated to machine specifications.
3. Should be installed on a flat, level surface.
4. Should receive good ventilation.
5. Should not be connected to an electrical circuit with other equipment or where voltages may vary.
6. Should not be installed near a direct heating or cooling source or vent.
7. Should not be exposed to high dust concentration.
8. Should not be exposed to direct sunlight
9. Should not be exposed to high temperatures, high humidity, steam or chemical fumes.

### 4.12.1 Blank pages

Symptom: Page is solid white.



#### Poor development

- Remove the toner cartridge and shake it a few times to redistribute the toner inside. If the problem persists, replace the toner cartridge.
- The drum cartridge or toner cartridge may be not installed correctly. Install each cartridge correctly.

#### Improper LED exposure

- Replace the LED Print Head Unit.
- Replace the Main Control PCB.

#### Improper charging

- Replace the High Voltage Unit.
- Replace the Main Control PCB.

### 4.12.2 Black pages

Symptom: Page is solid black.



#### Improper LED exposure


- Replace the LED Print Head Unit.
- Replace the Main Control PCB.

#### Improper charging

- Replace the High Voltage Unit.
- Replace the Main Control PCB.

### 4.12.3 Printout too light

Symptom: Printed image is faint or does not print solid.

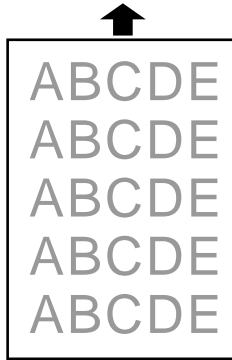

#### Poor development

- Remove the toner cartridge and shake it a few times to redistribute the toner inside. If the problem persists, replace the toner cartridge.
- Replace the High Voltage Unit.
- Clean the LED print head.

#### Defective Drum


- Replace the Drum Cartridge.

#### Poor image transfer

- Replace the Image Transfer Unit.
- Replace the High Voltage Unit.
- Replace the Main Control PCB.

### 4.12.4 Printout too dark

Symptom: Printed image is faint or does not print solid.

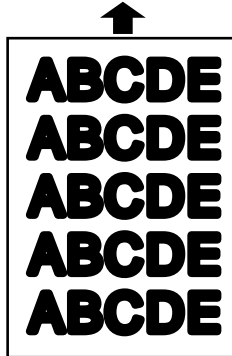

#### Poor development

- Remove the toner cartridge and shake it a few times to redistribute the toner inside. If the problem persists, replace the toner cartridge.
- Replace the High Voltage Unit.
- Clean the LED print head.

#### Defective Drum


- Replace the Drum Cartridge.

#### Poor image transfer

- Replace the Image Transfer Unit.
- Replace the High Voltage Unit.
- Replace the Main Control PCB.

### 4.12.5 Blurred background

Symptom: Copies show a gray or dark background.

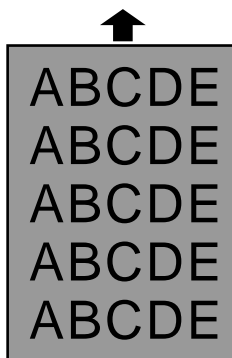


#### Poor development

- Replace the High Voltage Unit.
- Replace the Main Control PCB.
- Replace the Toner Cartridge.
- Replace the Drum Cartridge.

#### 4.12.6 Uneven print density

Symptom: Image graduates from dark to light across page.

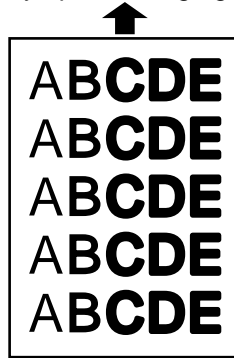

##### Poor development

- Remove the toner cartridge and shake it a few times to redistribute the toner inside. If the problem persists, replace the toner cartridge.
- Replace the High Voltage Unit.
- Clean the LED print head.

##### Defective Drum


- If the drum surface for moisture condensation found, leave drum in unit with power on to dry.
- Replace the Drum Cartridge.

##### Poor image transfer

- Replace the Image Transfer Unit.
- Replace the High Voltage Unit.
- Replace the Main Control PCB.

#### 4.12.7 Irregularities

Symptom: Portions of image are broken or missing.

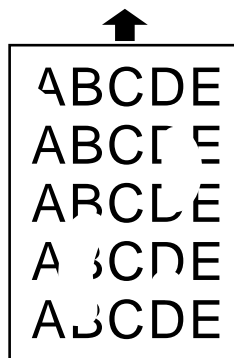


##### Poor image transfer

- Replace the Image Transfer Unit.
- Replace the High Voltage Unit.

### 4.12.8 White (Black) Line

Symptom: White or black strip appears vertically through image.

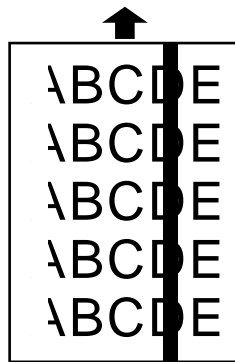

#### **Poor development**

- Replace the Toner Cartridge.

#### **Defective Drum**

- Replace the Drum Cartridge.

#### **Improper charging**

- Replace the Drum Cartridge.

#### **Improper fusing**

- Replace the Fusing Unit.

#### **Poor image transfer**

- Replace the Image Transfer Unit.

#### **Improper LED exposure**


- Replace the LED Print Head Unit.

#### **Poor scanning**

- Clean the Contact Grass.

### 4.12.9 Toner Smudges

Symptom: Background appears “peppered” with black spots.

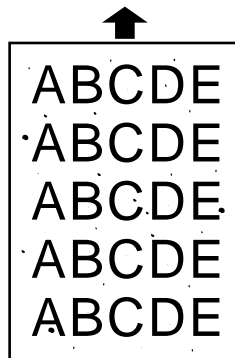

#### **Poor scanning**

- Clean the Contact Grass.

#### **Improper fusing**

- Clean the Fusing Rollers. If it is not effective, replace Rollers or the Fusing Unit.

## 4.13 LCD Error Messages

Your fax machine's LCD messages can help you spot problems.

---

### LCD error messages (Alphabetic list)

What you see on the LCD    What it means/*What to do*

<b>All Commands In Use</b>	Your fax machine has all of its 99 possible delayed commands (automatic redialing counts as one) stored in memory and cannot accept another. <i>Wait until your fax has completed one of the delayed commands or delete an existing command by using <b>REVIEW COMMANDS</b>.</i>
<b>Already Stored</b>	You tried to enter the same fax (or phone) number which is already entered in your fax machine. <i>Enter a different fax (or phone) number.</i>
<b>Box In Use</b>	You tried to erase a F-Code box which contains at least one document. <i>Erase the document(s), then try again.</i>
<b>Call For Service</b>	The scanner lamp is dim or inoperable. Make repeated copies to help evaporate any internal moisture. <i>See page 4-21.</i>
<b>Change to Fax Mode</b>	You tried to store the document for polling (or for F-Code Box) when the machine is in the Copy mode. You can store the fax document only when the machine is in the Fax mode.
<b>Check Memory Tx</b>	You tried to turn the Fax&Copy feature on, but the memory transmission setting is off. To use the Fax&Copy feature, the memory transmission setting must be set to on. <i>Set the Memory Tx to on, then try again.</i>
<b>Check Paper Size Open&amp;Close Top Cover</b>	The difference sized paper which is not same sized paper you told your sized paper you told your machine is loaded. <i>Set correct sized paper or change the paper size setting.</i>
<b>Close Scanner Cover Close Top Cover Close 1st Side Cover Close 2nd Side Cover</b>	The cover indicated on the LCD is open or has not been closed securely. <i>Close it properly.</i>
<b>Close 1st Cassette Close 2nd Cassette</b>	The paper cassette indicated on the LCD is open or has not been closed securely. <i>Close it properly.</i>
<b>Communication Error</b>	A communication error disrupted the reception or transmission. <i>If you were transmitting, press stop to clear the error message and then re-try the transmission. If you were receiving a fax, try to contact the other person and have him/her re-try the transmission. (The problem may be entirely with his/her machine, phone line, etc.)</i>
<b>Copy Off</b>	You tried to change your fax machine to the copy mode, but the unit's copy protection feature is on, preventing such use. <i>Turn off copy protection.</i>
<b>Dept. Code Full</b>	You tried to enter department code more than 100. Your machine can store up to 100 department codes.
<b>Document Full</b>	You tried to enter an document into an F-Code box, but the machine has reached its capacity. <i>Delete documents stored in F-Code boxes until the machine will let you proceed.</i>
<b>Document Jam ContStor Enter/Cancel</b>	An original document jam while you are using the ADF for either faxing or copying.

What you see on the LCD	What it means/ <i>What to do</i>
<b>Document Stored</b>	You tried to erase a batch box which contains at least one document. <i>Erase the document(s), then try again.</i>
<b>Drum Near End</b>	Your drum will need to be replaced soon.
<b>Enter No. (0-32)</b>	You tried to enter a call group number greater than 32. Your machine can maintain 32 call groups, numbered 1-32 (call group 0 covers all the groups). <i>Determine the correct call group identifier number and enter it, instead.</i>
<b>Enter No. (000-255)</b>	If the optional NIC (network interface card) is attached to your machine, and you tried to enter a TCP/IP address greater than 255. <i>Enter the correct TCP/IP address.</i>
<b>Enter Reduce/Enlarge</b>	You tried to copy your document on the paper other than A4, A5 or F4 sized paper using the bypass tray, or the calculated reduction or enlargement ratio is out of the acceptable range (50 – 200 %) when the copy reduction or enlargement ratio is set to “Auto”. <i>Enter the reduction or enlargement ratio manually although a part of the image might be lacked, or change the paper for copying.</i>
<b>Enter Scan Size</b>	When you using the FBS (Flatbed scanner) glass, you must manually enter the scan size of your document. <i>Press <b>DOCUMENT SIZE</b> to choose the size.</i>
<b>Feeder In Use</b>	The command you're trying to enter requires the use of the ADF, which is already in use. <i>Wait for the machine to stop using the ADF, then try again.</i>
<b>Hang Up Phone</b>	The optional handset is off-hook. <i>Hang it up, making sure the upper part of the handset presses down on the “hook” button.</i>
<b>In Relay Box</b>	You tried to store a document for polling in an F-Code box which is set to be a relay box. <i>Select an F-Code box which is set to be a bulletin box, then try again.</i>
<b>In Secure Box</b>	You tried to store a document for polling in an F-Code box which is set to be a security box. <i>Select an F-Code box which is set to be a bulletin box, then try again.</i>
<b>In Use in P OneTouch</b>	You tried to erase the F-Code box or Batch box, which is programmed in the programmable one-touch key. <i>Erase the programmable one-touch key that contains the F-Code box or Batch box you want to erase, then try again.</i>
<b>Invalid I.D. Code</b>	The F-Code box I.D. code you entered isn't valid. <i>Try re-entering your F-Code box I.D. code.</i>
<b>Invalid Number</b>	You pressed a key which has no function during the current operation.
<b>Invalid Paper Size</b>	If the optional printer controller is attached to your machine, it can use the special sized paper with the bypass tray. However, it should be used only for the PC printing, it cannot be used for copying. So, if you tried to copy onto the special sized paper with bypass tray, this message will appear.
<b>Invalid Passcode</b>	The protection passcode you entered isn't valid. <i>Repeat the operation, entering the correct protection passcode.</i>
<b>Line Busy</b>	You tried to erase a document which someone is polling from your machine. <i>Wait for the fax to complete the polling operation, then try again.</i>
<b>Macro In Use</b>	You tried to change the function for a Soft key, but that Soft key has been programmed in a Macro key. You cannot change the Soft key function until erase the Macro key that contains the Soft key you want to change. <i>Erase the Macro key, then try again.</i>



What you see on the LCD	What it means/ <i>What to do</i>
<b>Memory Overflow Start Or Cancel</b>	During transmission (or copying), you tried to enter more pages into memory than your fax could store. Press <b>START</b> to tell your fax to keep as many pages in memory as possible, or press <b>CANCEL</b> to delete from memory all pages stored during this operation (but not previous operations).
<b>Mirror Carriage Error</b>	The mirror carriage of your machine has become inoperable.
<b>Mirror Locked</b>	The transport mode is not turned off. <i>Turn off the transport mode.</i>
<b>No Command</b>	You pressed <b>REVIEW COMMANDS</b> to review upcoming commands, but your fax machine had none stored.
<b>No Dept. Code</b>	You tried to turn on the department code setting but there are no department codes stored in your fax machine. <i>Store at least one department code, then try again.</i>  <i>... or ...</i> You entered incorrect department code at fax sending while the department feature is on. <i>Enter correct department code.</i>
<b>No Document Stored</b>	You tried to print a document from memory, but your fax machine had none stored.
<b>No Drum</b>	The drum cartridge is missing or has not been properly installed in your fax machine. <i>Please properly install the drum cartridge.</i>
<b>No Number Stored</b>	You selected an autodialer, batch box or F-Code box number for which there is no fax (or phone) number programmed. <i>Either choose another number or dial a phone number directly from the numeric keypad.</i>
<b>No Passcode</b>	You tried to program a security feature, but there's no protection passcode stored in your fax machine. <i>Store a protection passcode in your machine, then retry again.</i>
<b>No PIN Number</b>	You selected "Mode1" in the pin mask feature and tried to call an autodialer number in which no PIN has been entered, or to call using numeric keypad without PIN. <i>Enter a PIN, then try again.</i>
<b>No Report</b>	You requested an activity journal or confirmation report, but your fax machine has no record of any fax jobs having occurred.
<b>No Toner Cartridge</b>	<b>The toner cartridge is missing or has not been properly installed in your fax machine. Please properly install the toner cartridge.</b>
<b>Not Allowed in Macro</b>	During macro registration, you pressed the key which cannot be registered in Macro, such as <b>MONITOR/CALL</b> key or <b>SECURITY RECEPTION</b> key.
<b>Other Key Setting</b>	You tried to enter the same function which is already stored in other Soft key. <i>Store the different function.</i>
<b>Open Top Cover Please Remove Paper</b>	The paper is jammed in your fax machine. <i>Open the cover indicated on the LCD, and remove the jammed paper</i>

What you see on the LCD	What it means/ <i>What to do</i>
<b>Open 1st Side Cover Please Remove Paper</b>	<i>carefully.</i>
<b>Open 2nd Side Cover Please Remove Paper</b>	
<b>Open Top/2-Bin Cover Please Remove Paper</b>	
<b>Remove Bypass Paper Open&amp;Close Top Cover</b>	
<b>Open&amp;Close ScanCover Reset Document</b>	Either your document wasn't inserted correctly, or the fax to which you're sending can't handle the document's page length. <i>Reset the page and try again.</i>
<b>Please Call Service</b>	The printer unit of your fax machine has become inoperable. <i>See page 4-21.</i>
<b>Please Replace Drum</b>	Your drum cartridge has reached the limit of its design life. Your machine cannot print until the drum cartridge is replaced. <i>Please replace the drum cartridge.</i>
<b>Please Replace Toner</b>	Your toner cartridge is empty. Your machine cannot print until the toner cartridge is replaced. <i>Replace the toner cartridge.</i>
<b>Please Supply Paper</b>	The paper cassette or bypass tray is out of paper. <i>Supply paper to the cassette and/or the bypass tray.</i>
<b>Please Wait</b>	Your fax machine's printer is either warming up or busy. <i>Please wait until the fax is finished printing and then re-try your command or operation.</i>
<b>Polling In Use</b>	You tried to store the polling document in your fax machine, where one already had been stored. <i>Wait for the fax to complete the regular polling operation or delete the stored document, then try again.</i>
<b>Printer In Use</b>	The command you're trying to enter requires the use of the printer, which is already in use. <i>Wait for the fax to finish printing, then try again.</i>
<b>Protect Doc. Stored</b>	A received document was in your fax's memory when you tried to turn off the security reception passcode. <i>Print the received document from your fax's memory, then retry the desired operation.</i>
<b>Ration must be 100%</b>	You cannot set the magnification ratio in Negative/Positive copy. <i>Set the magnification ratio to 100 % to use the Negative/Positive copy.</i>
<b>Scanner In Use</b>	The command you're trying to enter requires the use of the scanner, which is already in use. <i>Wait for the fax to complete the scan, then re-try the desired command.</i>
<b>SecurityRx is Off</b>	You tried to turn the security reception on using a Soft key which is assigned to set the security reception to on or off, but security reception setting has not set to on. <i>To turn on or off the security reception using a Soft key, first set the security reception setting to on.</i>
<b>Sub-address In Use</b>	You tried to enter a sub-address identical to one already being used in another F-Code box. <i>Enter a different sub-address.</i>
<b>Toner Low</b>	Your fax machine is almost out of toner.

What you see on the LCD	What it means/ <i>What to do</i>
<b>Too Many Characters</b>	<p>You attempted to enter too many numbers or other characters in the current operation.</p> <p>Press <b>CANCEL</b> to delete the extra characters, then try again. You may wish to review the operation's appropriate instructions.</p>
<b>Too Many Locations</b>	<p>You tried to enter too many numbers for a broadcast. You can enter up to 200 autodialer numbers and up to 30 numbers entered through the numeric keypad.</p> <p>Press <b>CANCEL</b> to delete the extra numbers and then try again.</p>
<b>Too Many Steps</b>	<p>You tried to enter too many steps for a macro. You can enter up to 60 steps into a macro key.</p>
<b>Unable to Reduce</b>	<p>In the reduction copy using the ADF, if the calculated ratio is smaller than minimum reduction ratio (50%), this message will appear and you cannot make the reduction copy.</p> <p><i>Use the FBS glass, however parts of the image might not be copied.</i></p>
<b>Use FBS Glass</b>	<p>You tried to enlargement copy using the ADF. Your machine cannot enlargement copy from the ADF.</p> <p><i>Please set your document on the FBS glass to make the enlargement copy.</i></p>
<b>Select Paper Size</b>	<p>You tried to make a copy in the following conditions:</p> <ul style="list-style-type: none"> <li>• Paper size selection is set to "Auto".</li> <li>• The bypass tray has the paper other than A4, A5 or F4.</li> <li>• Paper cassette(s) runs out of paper.</li> </ul> <p>Press <b>PAPER SIZE</b> to select your desired paper.</p>

## 4.14 Error Codes

If an error occurs during a communication, a check message will be printed. The following provides an explanation of the information found on check messages.

- A possible solution to the problem
- The date and time of the attempted communication
- The sending location (if the remote fax has a Location ID)
- The number of pages which got through before the error terminated the call
- The error code
- The sample document.

You will also see a code listed in the Result column of the report. Result codes indicate the specific problem encountered:

- “D” codes occur while dialing
- “R” codes occur during reception
- “T” codes occur during transmission

Here is a list of error codes the fax machine may print.

### Dialing errors

- D.0.2** The remote fax machine is busy. Try the call again.
- D.0.3** The **STOP** button was pressed while the unit was dialing. Try the call again.
- D.0.6** The autodialer number was not programmed. Program the autodialer number.
- D.0.7** The dialing time out occurred because the remote unit did not answer. Try the call again.
- D.0.8** Dial tone was not detected. Try the call again.

### Reception errors

- R.1.1** T1 time-out. The calling unit was not a fax machine or the transmitting unit is having difficulties.
- R.1.2** Compatibility error. The calling unit is attempting to poll a document that does not exist.
- R.1.4** The **STOP** button was pressed during reception.
- R.1.5** The fax machine didn't detect the silence period for ending channel when receiving RCR.
- R.2.3** No response to FTT. Poor phone line conditions made fax communication impossible. Enable the one second pause after CED on Memory Switch C:0. Also try increasing the echo wait time on Memory Switch C:1 if echo is on the line.
- R.3.1** No response to CFR. DCN was received from the transmitter. Poor line conditions made communication impossible. Adjust the echo wait time on Memory Switch C:1. Try increasing the output levels via Machine Parameter A:1.
- R.3.3** Too many errors were detected during data reception. The carrier was interrupted. Increase the data error rate on Memory Switch C:0.
- R.3.4** DCN was received after FTT. Communication was not possible at 2400 bps. Poor phone line conditions prevented fax communication. Enable the Eye Quality Check on Memory Switch D:1 and D:2.
- R.4.2** MPS/EOM/EOP was not received. Either the line disconnected before reception was completed or too many errors were detected by the receiving unit. Adjust the data error rate on Memory Switch C:0. It may also be necessary to decrease the receive communication speed via Memory Switch C:0.

- R.4.4**      The receiving fax machine has reached its memory capacity.
- R.5.1**      DCN was received instead of RR during ECM communication.
- R.5.2**      Line noise or other problems prevented ECM reception.
- R.8.4**      A compatibility error occurred.
- R.8.10**     Line noise or other problems prevented line probing.
- R.8.11**     The fax machine timed out while waiting for the retrain signal.

## **Transmission errors**

- T.1.1**      T1 time-out. The remote fax machine didn't respond to your machine. This usually occurs during a manual transmission or when an incorrect number was dialed. Call someone at the remote machine.
- T.1.2**      The fax machine's page counter detected a possible document feeder error. Carefully put the document back into the feeder and try the call again.
- T.2.1**      CFR or FTT was not received from the remote machine. Either the phone line disconnected during fax communication or transmission became impossible due to bad phone line conditions. Try the call again. It may be necessary to increase the output levels on Machine Parameter A:1. The receive machine may also have closed network or block junk fax enabled.
- T.2.2**      The two fax machines were incompatible. No mailbox at receiver or security transmission is enabled.
- T.2.3**      FTT was received from the remote machine at 2400 bps. Bad phone line conditions made fax communication impossible. Conditions can change rapidly, so try the call later. Turn on the echo protect tone on Memory Switch B:0. Also adjust the interval between DCS and TCF on Memory Switch B:1. If the problem persists, try increasing the output levels on Machine Parameter A:1.
- T.3.1**      The page counter in the fax machine detected a document feeder error during transmission. Carefully re-insert the document into the feeder and re-try the call.
- T.3.2**      The fax machine didn't detect the silence period for ending channel.
- T.4.1**      No response to MPS/EOP/EOM. Poor phone lines caused the receiving unit to disconnect. Adjust the interval between CFR and data on Memory Switch B:1. Try increasing the output levels on Machine Parameter A:1. It may also be necessary to adjust the transmit speed on Memory Switch B:0.
- T.4.2**      RTN was received from the remote machine. After transmission began, poor line conditions developed. Try the call again. Attempt the solutions described for the T.4.1 error.
- T.4.4**      Poor line conditions prevented transmission. PIP was received. The transmission was interrupted by the call mode. The receiving unit may be experiencing problems. Try the call again.
- T.5.1**      No response to RR from the remote machine. Line noise or other problems prevented ECM transmission. Increase the ECM response time on Memory Switch B:2.
- T.5.2**      No response to CTC. Line noise or other problems prevented ECM transmission. Increase the ECM response time on Memory Switch B:2.
- T.5.3**      EOR was received from the remote unit but further transmission was not possible. Adjust Memory Switch B:5 for this problem.
- T.8.1**      A compatibility error occurred.
- T.8.10**     Line noise or other problems prevented line probing.
- T.8.11**     The remote fax machine didn't complete the equalizer training phase.

## Communication Error Messages

The error messages on Check Message printouts indicate the following:

Here's a brief summary:

Error Message	Possible Meanings
Check condition of remote fax.	<ul style="list-style-type: none"><li>• Remote machine malfunctioned</li><li>• No handshake signals from remote machine</li><li>• Wrong phone number reached</li></ul>
Repeat transmission.	<ul style="list-style-type: none"><li>• Poor phone line conditions prevented communication</li><li>• No handshake signals from remote machine</li><li>• Document missfeed or miscount</li><li>• Unable to reach remote machine after attempting specified number of redial</li></ul>
Line is busy.	<ul style="list-style-type: none"><li>• Remote machine was busy</li><li>• Remote machine didn't answer</li></ul>
Check received documents.	<ul style="list-style-type: none"><li>• Receive confirmation signal not received from remote machine</li><li>• Poor line conditions caused a poor image</li></ul>
Memory full.	<ul style="list-style-type: none"><li>• Remote unit's memory capacity has been exceeded</li></ul>
Dialing number is not set.	<ul style="list-style-type: none"><li>• An autodialer number is not stored programmed properly</li></ul>
Stopped.	<ul style="list-style-type: none"><li>• The <b>STOP</b> key was pressed at the remote fax during the handshake</li></ul>
(Message area is blank)	<ul style="list-style-type: none"><li>• Someone pressed <b>STOP</b> during communication</li><li>• Printer error occurred during communication</li></ul>

## 4.15 Service Call Error

When certain machine problems occur these message will appear in the LCD.

### 4.15.1 Call For Service

Symptom: "Call For Service" is in the LCD.

Suggested corrective action:

1. Verify the lamp turns on when the book cover open and close.
2. Verify the mirror carriage moves normally. (See "Mirror carriage error", page 4-3)
4. If during step 1 the lamp did not turn on, check the following connection:
  - Lamp assembly to the Inverter PCB (CN2)
  - Inverter PCB (CN1) to the Harness to the CCD PCB (P2000 00)
5. Replace the lamp and/or the Inverter PCB.

### 4.15.2 Please Call Service

When certain machine problems occur a "Please Call Service" message will appear in the LCD. When this message appears, access the printer maintenance mode / Service call function to determine the cause of the "Please Call Service" error message.

To access the printer maintenance modes:

1. Press **PROGRAM**, \*, 6.

The mode are contained within two main menu level.

```
Set Replace Counter
Program/Enter
```

```
Service Call
Program/Enter
```

2. Press **PROGRAM** to select "Service Call" mode and then press **ENTER**.

3. The error message will be displayed.

For example, when "Heater error" and "Drum Fuse Error" has occurred, the LCD will show:

```
Service Call : 2
Heater Error
```

Number of errors

Press **PROGRAM** to show the other printer error message.

The errors messages and an explanation of each are outlined below.

### **Heater Error**

Symptom: fuser heater malfunction.

Suggested corrective action:

1. Check the connectors from the power supply to the main control PCB and to the fuser unit.
2. Check the heater lamp. If it comes on, see step 3; if it does not, see step 5.
3. Check continuity of fuser unit. If OK, see step 4; if bad, replace the fuser unit.
4. Replace the power supply unit.
5. Replace the fuser unit. If the problem is not correct, see step 6.
6. Replace the main control PCB.

### **Thermistor Disconnect**

Symptom: broken or blown the heater lamp or thermistor in fuser unit.

Suggested corrective action:

1. Check the connectors from the power supply to the main control PCB and to the fuser unit.
2. Check the heater lamp. If it comes on, see step 3; if it does not, see step 5.
3. Check continuity of fuser unit. If OK, see step 4; if bad, replace the fuser unit.
4. Replace the power supply unit.
5. Replace the fuser unit. If the problem is not correct, see step 6.
6. Replace the main control PCB.

### **Thermistor Short**

Symptom: broken or blown the heater lamp or thermistor in fuser unit.

Suggested corrective action:

1. Check the connectors from the power supply to the main control PCB and to the fuser unit.
2. Check the heater lamp. If it comes on, see step 3; if it does not, see step 5.
3. Check continuity of fuser unit. If OK, see step 4; if bad, replace the fuser unit.
4. Replace the power supply unit.
5. Replace the fuser unit. If the problem is not correct, see step 6.
6. Replace the main control PCB.

### **Inside Fan Error**

Symptom: inside fan malfunction.

Suggested corrective action:

1. Verify the inside fan rotates when the power is on.
2. Check the connection between the Connect Printer PCB (P1313) and the fan.
3. Replace the fan motor if it doesn't rotate.
4. If the problem is not correct, replace the main control board.



## **RX Motor Error**

Symptom: RX motor malfunction

Suggested corrective action:

1. Verify the RX motor rotates when the power is on.
2. Check the connection between RX motor and the Connect Printer PCB (P1308). (See page 2-1.)
3. Replace the RX motor if it doesn't rotate.
4. If the problem is not correct, replace the main control board.

## **Drum Fuse Error**

Symptom: The fuse in the new drum cartridge does not disconnect when set the new drum cartridge.

Suggested corrective action:

1. Verify the drum cartridge is set correctly.
2. Check a point of contact between drum cartridge and machine's electrode.
3. Replace the drum cartridge.
4. Replace the main control PCB.

## **H-Vlt Fuse Disconnect**

Symptom: The fuse in the high voltage power supply is disconnected.

Suggested corrective action:

1. Replace the high voltage power supply and the drum cartridge.

## 4.16 LCD Failure

Symptom: No display in the LCD.

### **Suggested corrective action:**

1. Verify that the power cord is correctly connected and the power switch is ON.
2. Check for a blown fuse or open circuit on the unit's internal power supply.
3. Check the DC output voltages from the power supply unit to connector P10 on the main control PCB. If any of the following voltages are incorrect, replace the power supply.
  - Pin 1 : -12 VDC
  - Pin 2 : +12 VDC
  - Pin 3, 4, 5 : +5 VDC
  - Pin 6 : HC1
  - Pin 7, 8, 9 : +24 VDC
  - Pin 10, 11, 12, 13 : GND
  - Pin 14 : HC2
4. Check the following connectors:
  - LCD assembly to the Panel A PCB (P1903)
  - Panel A PCB (P190A) to the Harness to the main control PCB (P19A)
  - Panel A PCB (P190B) to the Harness to the main control PCB (P19B)
5. Replace the associated PCBs and connector harness.

## 4.17 General Power Failure

Symptom: Unit will not power up.

### **Suggested corrective action:**

1. Verify that the power cord is correctly connected and the power switch is ON.
2. Verify that the electrical outlet is on.
3. Check for a blown fuse or open circuit on the unit's internal power supply.
3. Check the DC output voltages from the power supply unit to connector P10 on the main control PCB. If any of the following voltages are incorrect, replace the power supply.
  - Pin 1 : -12 VDC
  - Pin 2 : +12 VDC
  - Pin 3, 4, 5 : +5 VDC
  - Pin 6 : HC1
  - Pin 7, 8, 9 : +24 VDC
  - Pin 10, 11, 12, 13 : GND
  - Pin 14 : HC2


## 4.18 Cleaning the Unit

Use a mild cleaning solution on a lint-free cloth to wipe the machine's cover, handset and paper cassette tray. Never spray cleaner directly onto the fax machine as the spray could damage components inside the fax.


### Curing frequent jams in the ADF

If you're having trouble with getting your original documents to feed properly, try this procedure:

1. Turn off your fax machine.
2. Get two soft, lint-free cloths and moisten them as follows:
  - One with a cleaner suitable for use on platen/rubber rollers. In steps 4 and 6, we'll call this the rollers cleaner.
  - The other with isopropyl alcohol
3. Open the scanner cover by holding the scanner cover release.  
**Important:** You must hold the cover open. It won't stay open by itself.
4. Use the cloth with the rollers cleaner to clean the face of the rollers. Rotate the rollers by hand to allow cleaning of the entire roller surface.

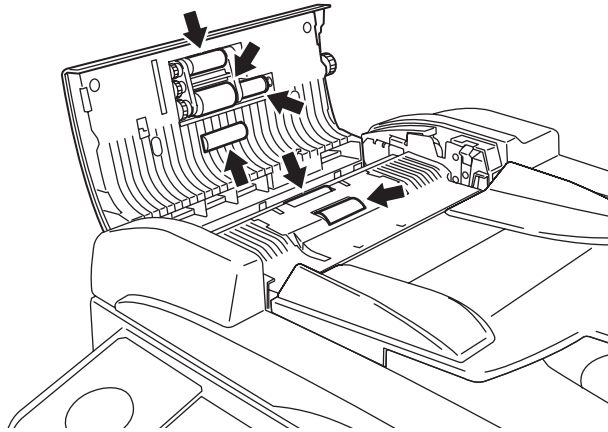


5. Open the inner cover fully.  
**Important:** You must hold the cover open. It won't stay open by itself.
6. Use the cloth with the rollers cleaner to clean the face of the rollers. Rotate the rollers by hand to allow cleaning of the entire roller surface.

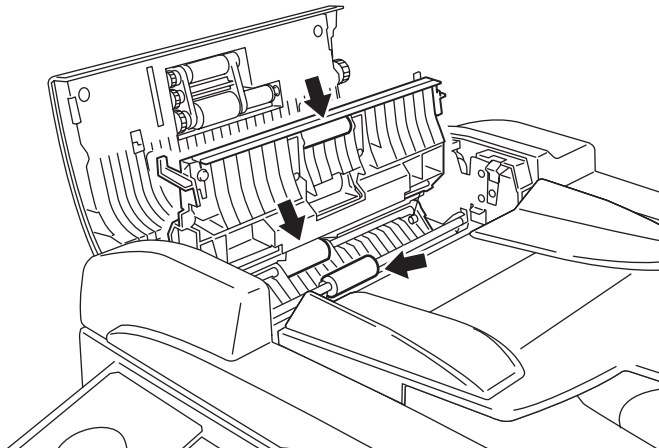

## Cleaning the FBS glass, Contact glass and white pad

1. Open the platen cover.
2. Get a soft, lint-free cloth and moisten it with isopropyl alcohol.  
**Important:** Make sure the cloth doesn't have any rough areas. Otherwise, it could scratch the glass surface of the FBS.
3. Using the cloth, gently clean the FBS glass, contact glass and the white background area on the underside of the platen cover.

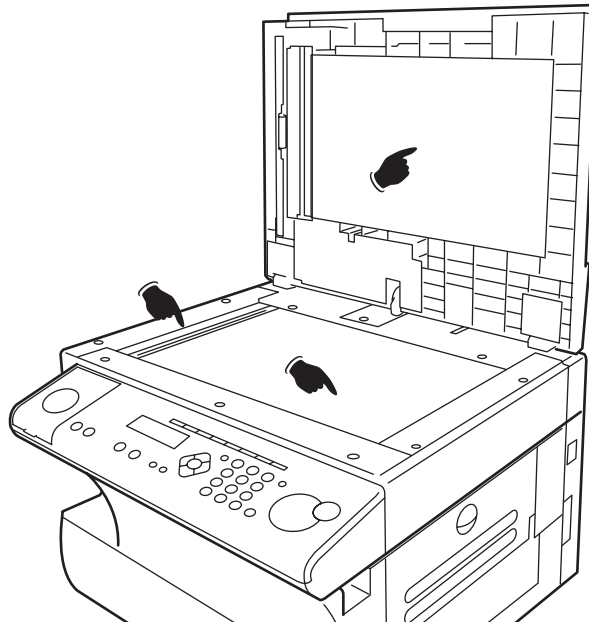


## Cleaning the LED print head

If you find your fax recipients complaining that the faxes you receive or copy image quality are streaked, the LED print head may be dirty.

**Important:** Be careful not to put your hand between the top cover and the machine.

1. Turn off your fax machine.
2. Get a soft, lint-free cloth and moisten it with isopropyl alcohol.
3. Open the top cover and then open the printer cover.  
**Important:** The fuser unit becomes very hot. Do not touch the fuser unit when you are cleaning the LED print head.

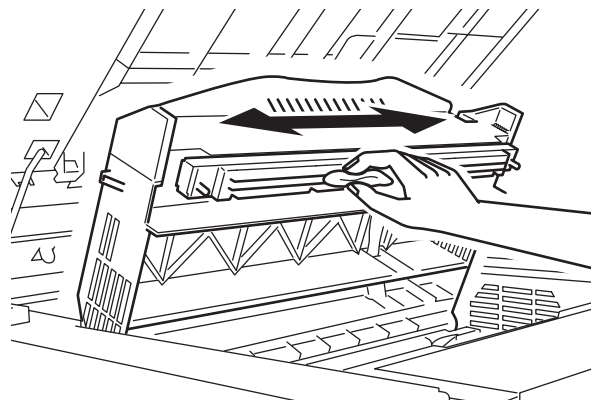

4. Using the cloth, gently clean the LED print head.  
**Note:** Do not use abrasive materials on the LED print head.

# Section5

## Maintenance & Adjustment

5.1 MAINTENANCE SCHEDULE .....	5-2
5.2 RE/DISASSEMBLE.....	5-3
5.2.1 Covers .....	5-5
5.2.2 PCBs.....	5-13
5.2.3 Sensors .....	5-23
5.2.4 Scanning section .....	5-24
5.2.5 Printer section.....	5-36
5.3 ADJUSTMENT.....	5-48
5.3.1 Adjustment of Retard roller pressure .....	5-48

## 5.1 Maintenance schedule

### Scanner Section

Parts Name	Maintenance Cycle (pages)		QTY	Reference Page
	Clean	Replace		
Separator roller *	○	—	1	5-25
Retard roller *	○	—	1	5-26
Other rollers *	○	—	—	5-27 to 5-30
Contact glass & FBS glass *	Clean if it dirty	—	1	—
Document press sheet (White sheet) *	Clean if it dirty	—	1	—
Exposure Lamp *	—	1,000 hours (continuous lighting)	1	5-21

\*: It is not maintenance parts. However, please replace when it becomes not works.

### Paper Take-up / Transport Section

Parts Name	Maintenance Cycle (pages)		QTY	Reference Page
	Clean	Replace		
Paper pick-up roller	○	100,000	1	5-42
Feed roller AP	○	100,000	1	5-44
Feed roller BP	○	100,000	1	5-43
Exit roller P	○	100,000	1	5-41

### Image Transfer Section

Parts Name	Maintenance Cycle (pages)		QTY	Reference Page
	Clean	Replace		
Image transfer roller	—	60,000	1	5-40

### Developing Section

Parts Name	Maintenance Cycle (pages)		QTY	Reference Page
	Clean	Replace		
Drum cartridge	—	20,000	1	See Operating Instructions
Toner cartridge	—	8,000	1	

### Fixing Section

Parts Name	Maintenance Cycle (pages)		QTY	Reference Page
	Clean	Replace		
Fixing unit	—	100,000	1	Page 5-40

**Note:** “○” means to clean the mechanism when a paper take-up or transport failure occurs.

## 5.2 Re/Disassemble




Before disassembling, disconnect the power cord and line cord.

5.2.1 COVERS.....	5-5
FRONT COVER .....	5-6
REAR COVER.....	5-6
TOP FRONT COVER / TOP RIGHT COVER / TOP LEFT COVER .....	5-7
TOP REAR COVER .....	5-7
HARNESS HOLDER .....	5-7
TX COVER .....	5-8
TX SIDE COVER F.....	5-8
TX SIDE COVER R .....	5-9
EXIT TRAY .....	5-9
OPTION COVER A.....	5-10
RX EXIT COVER .....	5-10
RIGHT COVER.....	5-11
COVER OPENER.....	5-11
PANEL COVER .....	5-12
PLATEN COVER .....	5-12
BOTTOM CORNER COVER .....	5-12
BYPASS TRAY .....	5-12
5.2.2 PCBS .....	5-13
MAIN CONTROL PCB.....	5-13
NCU PCB.....	5-14
MODULAR PCB .....	5-14
POWER SUPPLY UNIT (PSU).....	5-15
HIGH VOLTAGE POWER SUPPLY (HVPS).....	5-16
CONNECT PRINTER PCB.....	5-16
PANEL A, B, C and LCD .....	5-17
CONNECT SCANNER PCB.....	5-18
BATTERY PCB.....	5-20
INVERTER PCB .....	5-21
LAMP .....	5-21
CONNECT ADF PCB .....	5-22
5.2.3 SENSORS .....	5-23
TXIL .....	5-23
HOME .....	5-23
END .....	5-23
APS.....	5-23
DS1.....	5-23
DS2.....	5-23
PSS.....	5-23
TOS .....	5-23
PDS .....	5-23
PES.....	5-23
HPES .....	5-23
COVER SW .....	5-23
CASOP .....	5-23
JCOP .....	5-23
5.2.4 SCANNING SECTION.....	5-24
BELT INSTALLATION OF ADF SECTION.....	5-24
BELT INSTALLATION OF FBS SECTION .....	5-24
TXIL (ADF) / DS1 / DS2 .....	5-25
SEPARATOR ROLLER ASSEMBLY.....	5-25
RETARD ROLLER / TORQUE LIMITER.....	5-26
ADF MOTOR .....	5-27
FEED ROLLER A .....	5-27

ADF PERMIT SENSOR (APS) .....	5-28
FEED ROLLER B .....	5-29
EXIT ROLLER .....	5-30
HOME SENSOR / END SENSOR .....	5-32
FBS MOTOR .....	5-32
SCANNER ASSEMBLY .....	5-33
KNOB .....	5-35
5.2.5 PRINTER SECTION .....	5-36
COVER SWITCH .....	5-36
CASOP .....	5-36
SOLENOID .....	5-37
RX MOTOR .....	5-37
DRIVE GEAR ASSEMBLY .....	5-38
TOS .....	5-38
PICK UP ROLLER MP .....	5-39
HPES .....	5-39
IMAGE TRANSFER ROLLER .....	5-40
FIXING UNIT .....	5-40
PDS / Thermistor .....	5-41
EXIT ROLLER P .....	5-41
PES .....	5-42
PAPER PICK UP ROLLER .....	5-42
FEED ROLLER BP .....	5-43
FEED ROLLER AP .....	5-44
PSS .....	5-45
FAN, DUCT .....	5-45
LED PRINT HEAD .....	5-46
JCOP .....	5-46
BYPASS TRAY .....	5-47




## 5.2.1 Covers

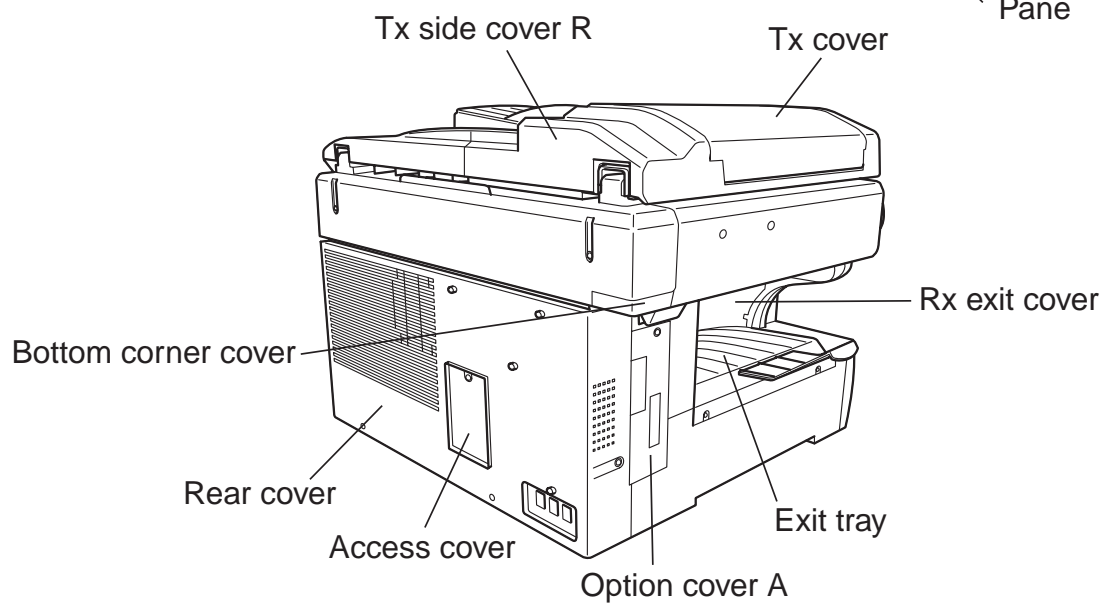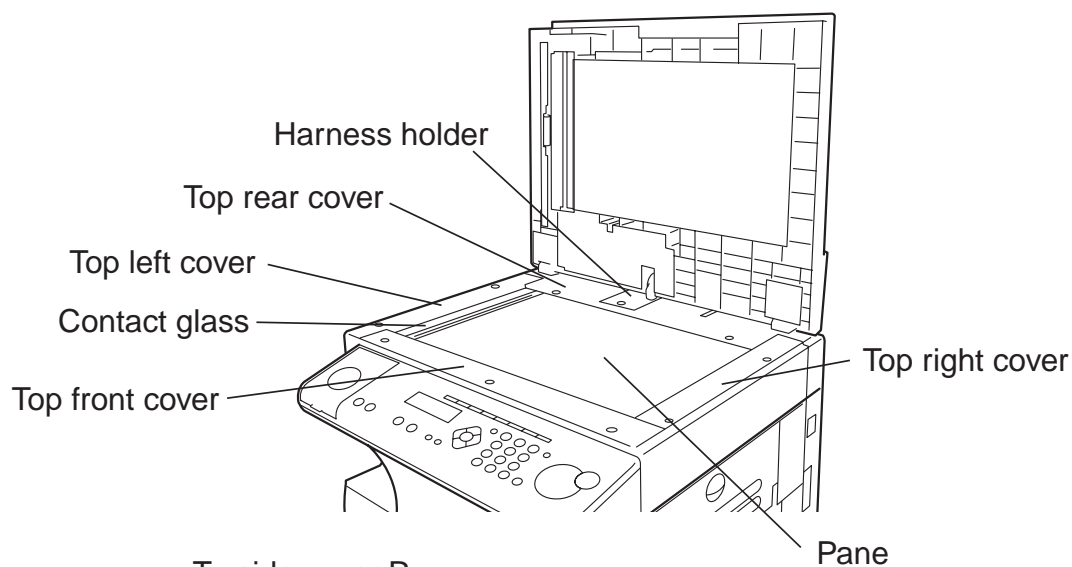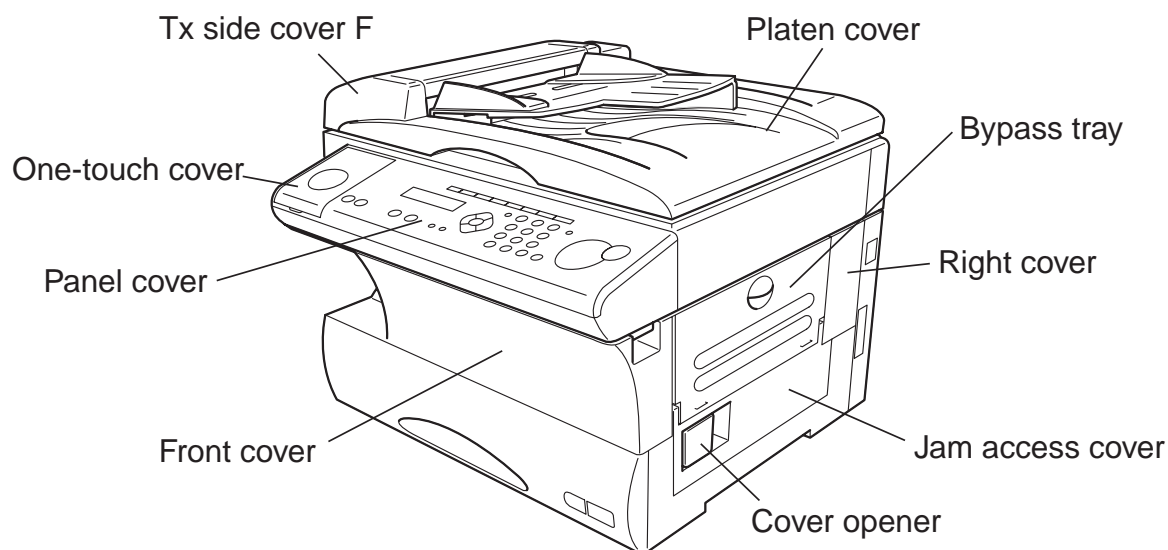


## FRONT COVER

1. Open the top cover.
2. Remove the two front cover mounting screw.
3. Remove the FRONT COVER.

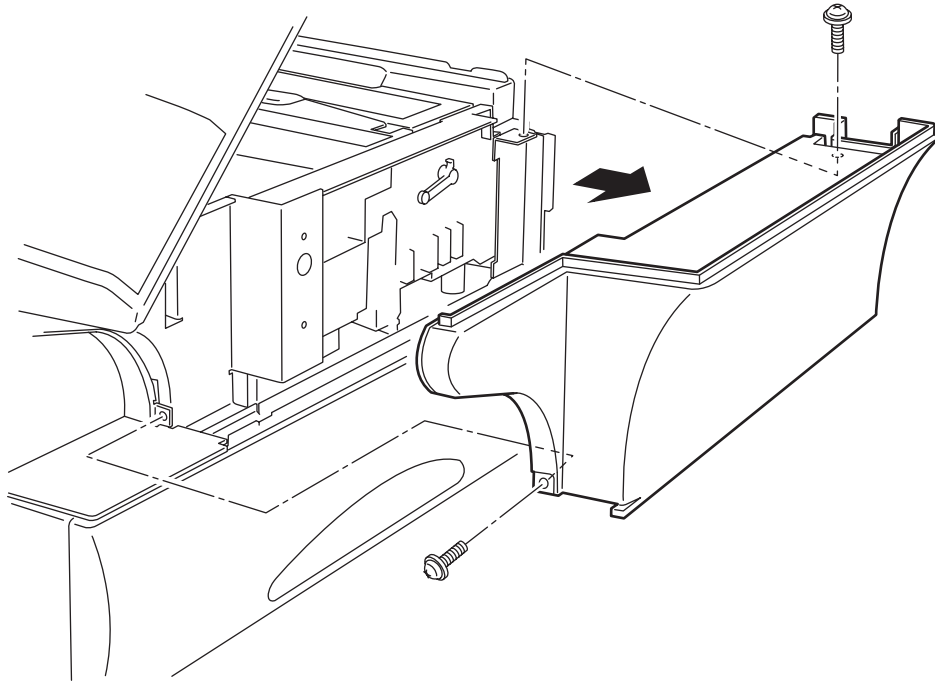


## REAR COVER

1. Open the top cover.
2. Remove the five rear cover mounting screws.
3. Disconnect the speaker connector and remove the REAR COVER.

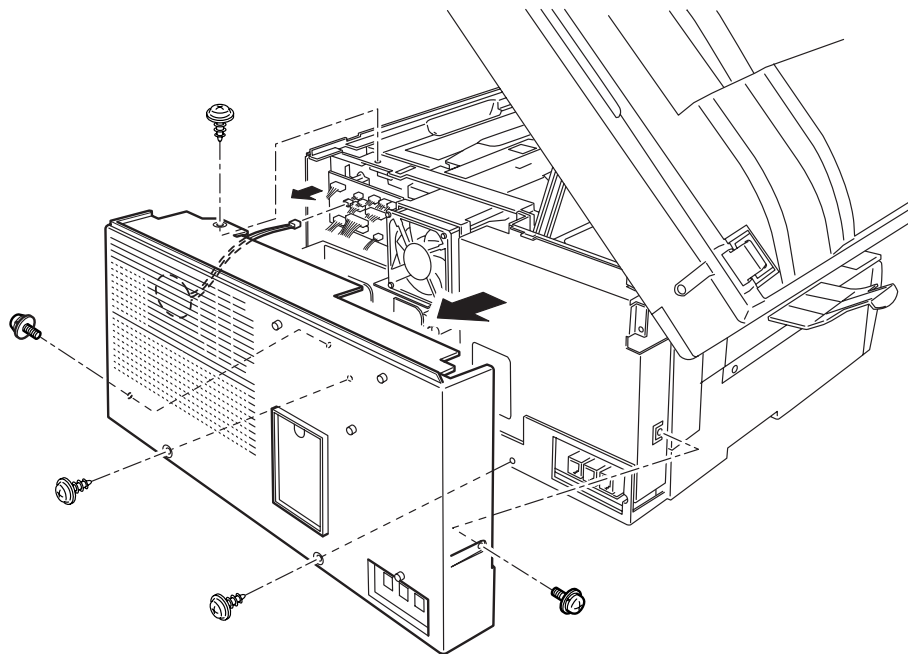

## TOP FRONT COVER / TOP RIGHT COVER / TOP LEFT COVER

1. Open the platen cover.
2. Remove the screw covers.
3. Remove the three top front cover mounting screws, and then remove the TOP FRONT COVER.
4. Remove the two top right cover mounting screws, and then remove the TOP RIGHT COVER.
5. Remove the two top left cover mounting screws, and then remove the TOP LEFT COVER.

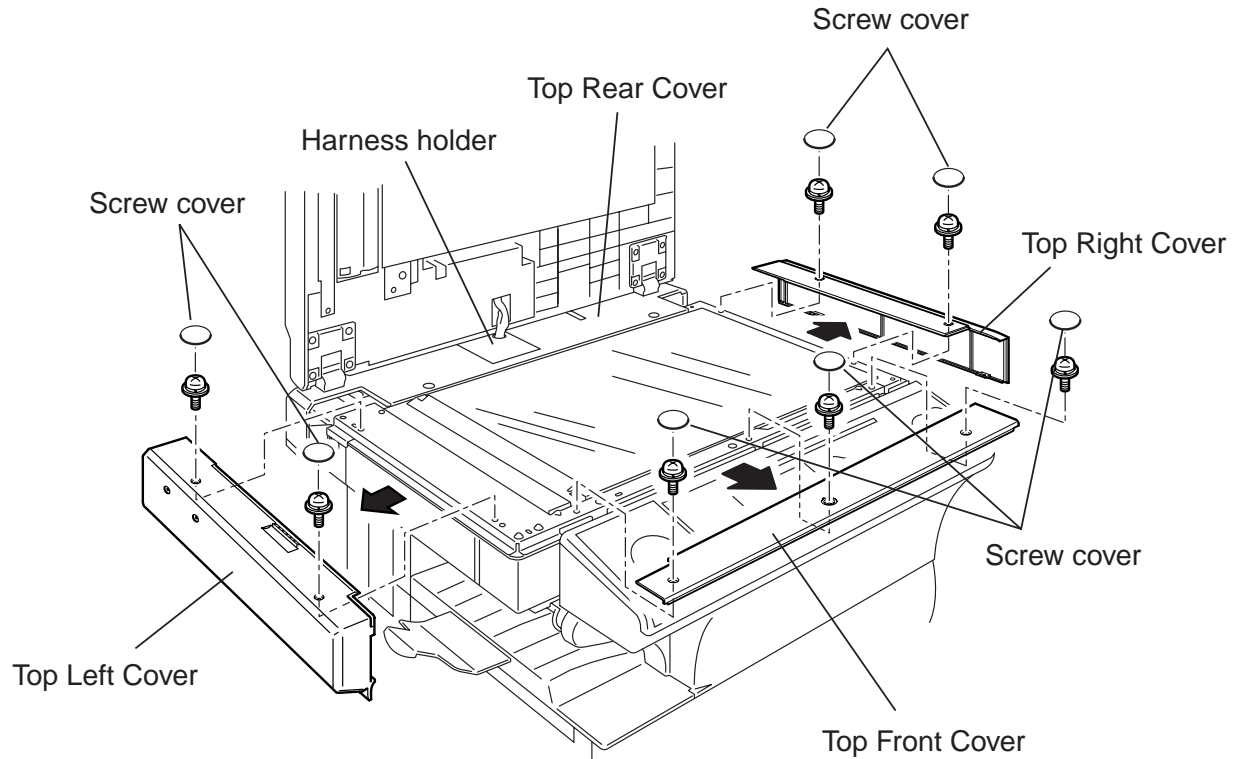

## TOP REAR COVER


Perform the procedure of step 1 through 6 in “**CONNECT SCANNER PCB,**” page 5-18.

## HARNESS HOLDER

Perform the procedure of step 1 through 4 in “**CONNECT SCANNER PCB,**” page 5-18.


## TX COVER

1. Open the scanner cover.
2. Remove the four Tx cover mounting screws.
3. Remove the TX COVER.

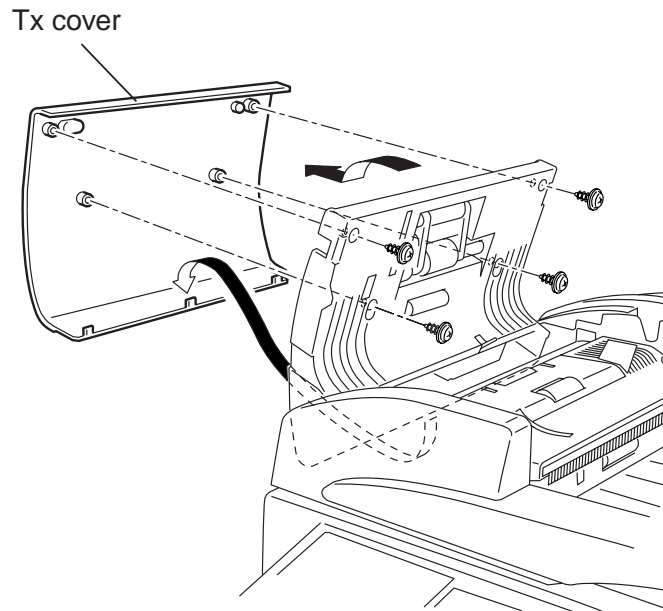


## TX SIDE COVER F

1. Open the platen cover.
2. Remove the Tx side cover F mounting screw.
3. Release the locking tab, and then remove the TX SIDE COVER F.

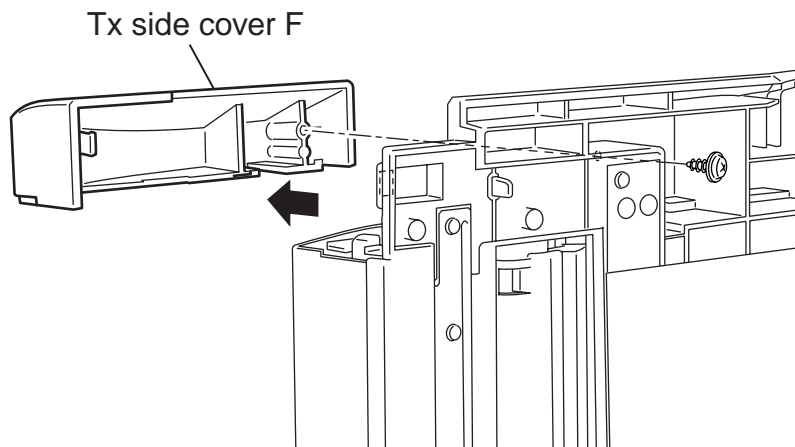


## TX SIDE COVER R

1. Open the platen cover.
2. Remove the three Tx side cover R mounting screws.
3. Remove the TX SIDE COVER R.

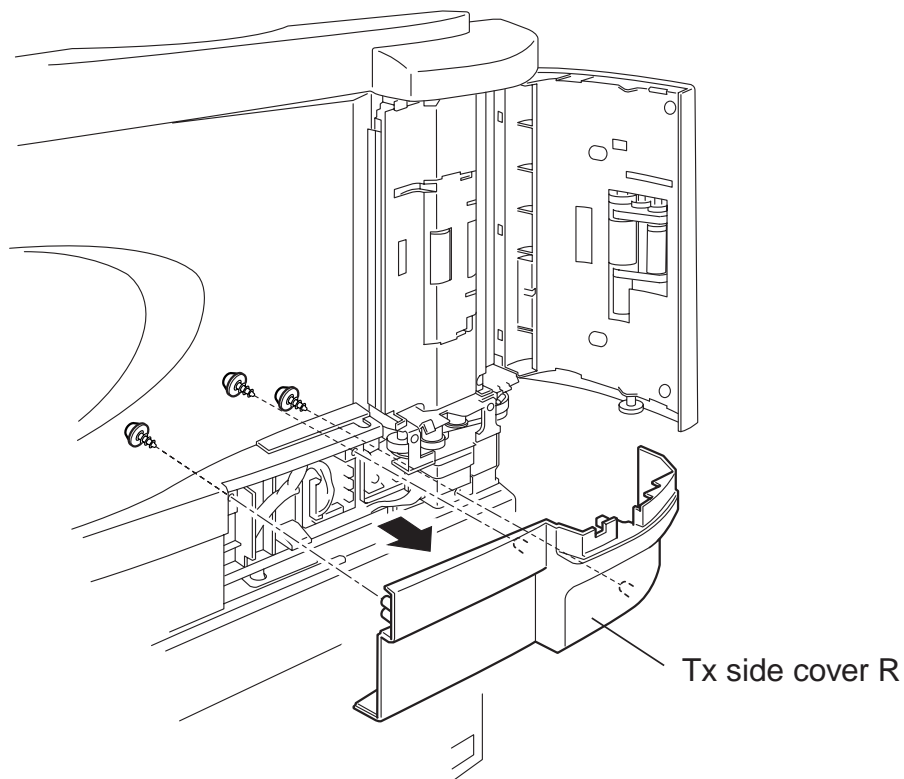


## EXIT TRAY

1. Open the cassette.
2. Remove the three exit tray mounting screws.
3. Remove the EXIT TRAY.

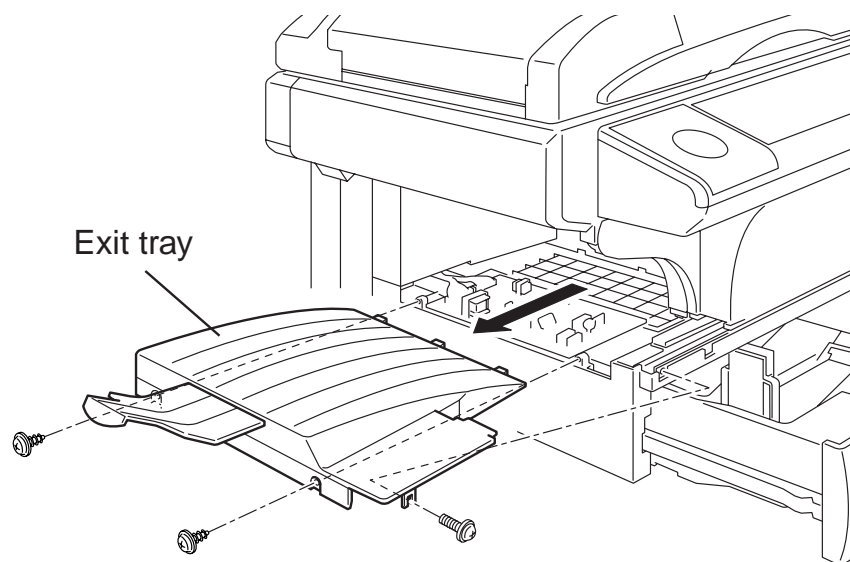


## OPTION COVER A

1. Remove the option cover A mounting screw.
2. Remove the OPTION COVER A.

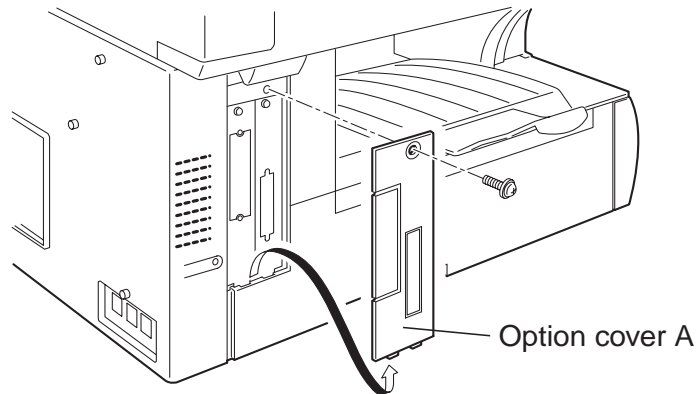


## RX EXIT COVER

1. Remove the EXIT TRAY.
2. Remove the TOP LEFT COVER.
3. Remove the OPTION COVER A.
4. Remove the Rx exit cover mounting screw, and then remove the RX EXIT COVER.

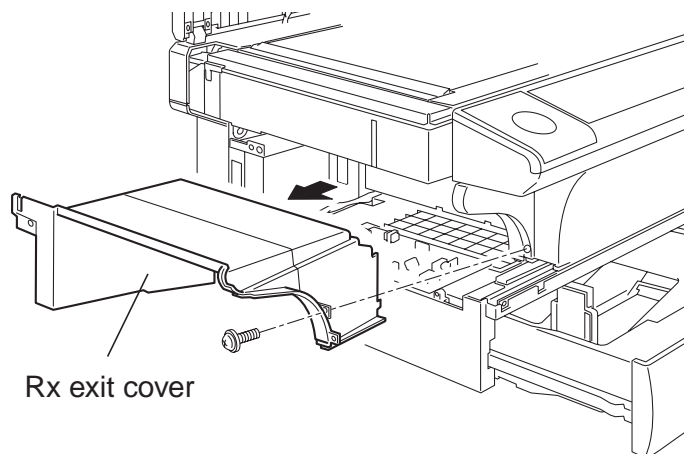


5. Separate the RX EXIT COVER A FROM B.

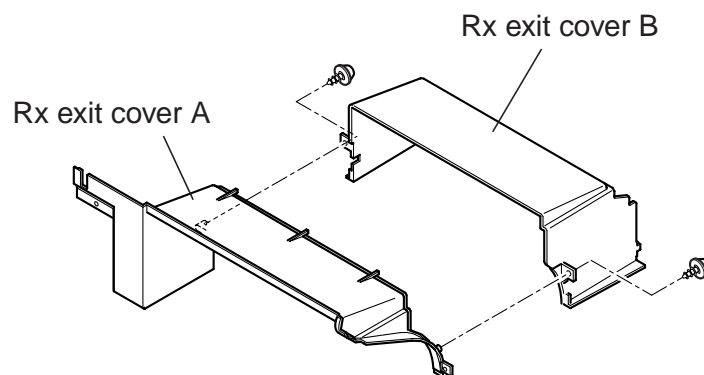


## RIGHT COVER

1. Remove the FRONT COVER.
2. Remove the REAR COVER.
3. Remove the two right cover mounting screws.
4. Slide the line cover and disconnect the harnesses of the TOS sensor and the HPES sensor.
5. Then remove the RIGHT COVER.

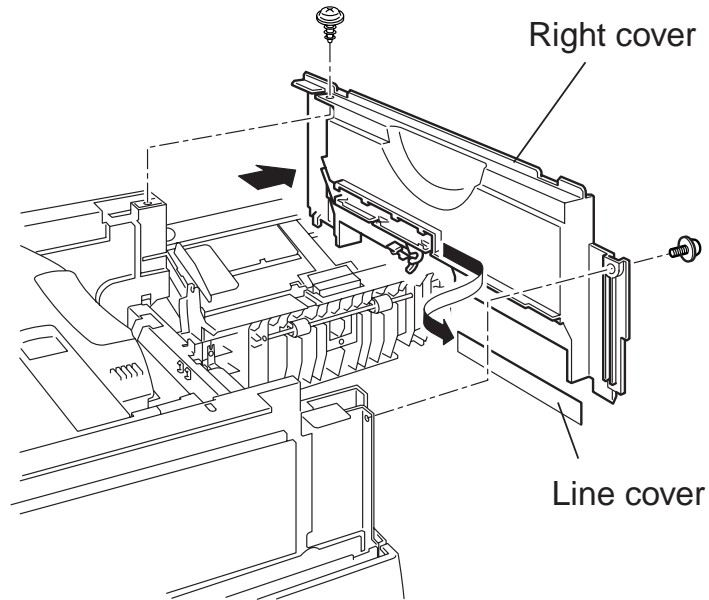

## COVER OPENER

1. Open the jam access cover.
2. Release the COVER LEVER.
3. Remove the COVER OPENER.

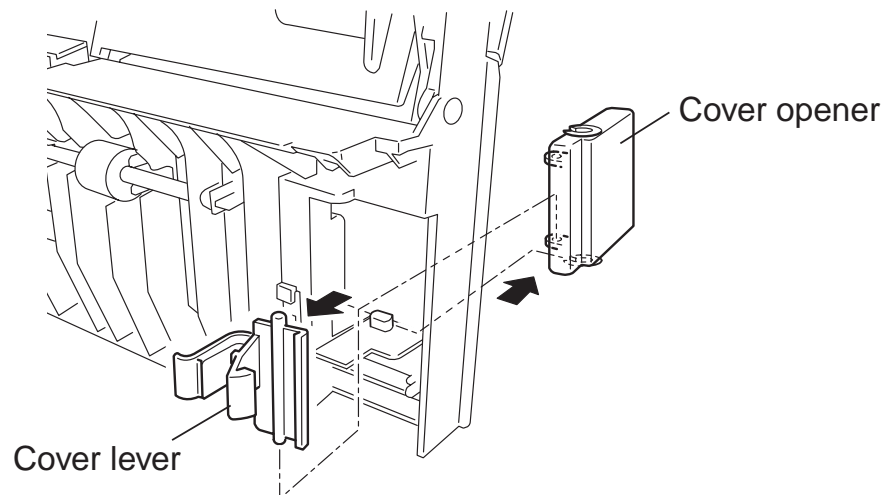

**PANEL COVER**

Perform the procedure of step 1 through 2 in “**PANEL A, B, C and LCD,**” page 5-17.

**PLATEN COVER**

Perform the procedure of step 1 through 5 in “**CONNECT SCANNER PCB,**” page 5-18.

**BOTTOM CORNER COVER**


Perform the procedure of step 1 through 2 in “**CONNECT SCANNER PCB,**” page 5-18.

**BYPASS TRAY**

Refer to page 5-47.




## 5.2.2 PCBs

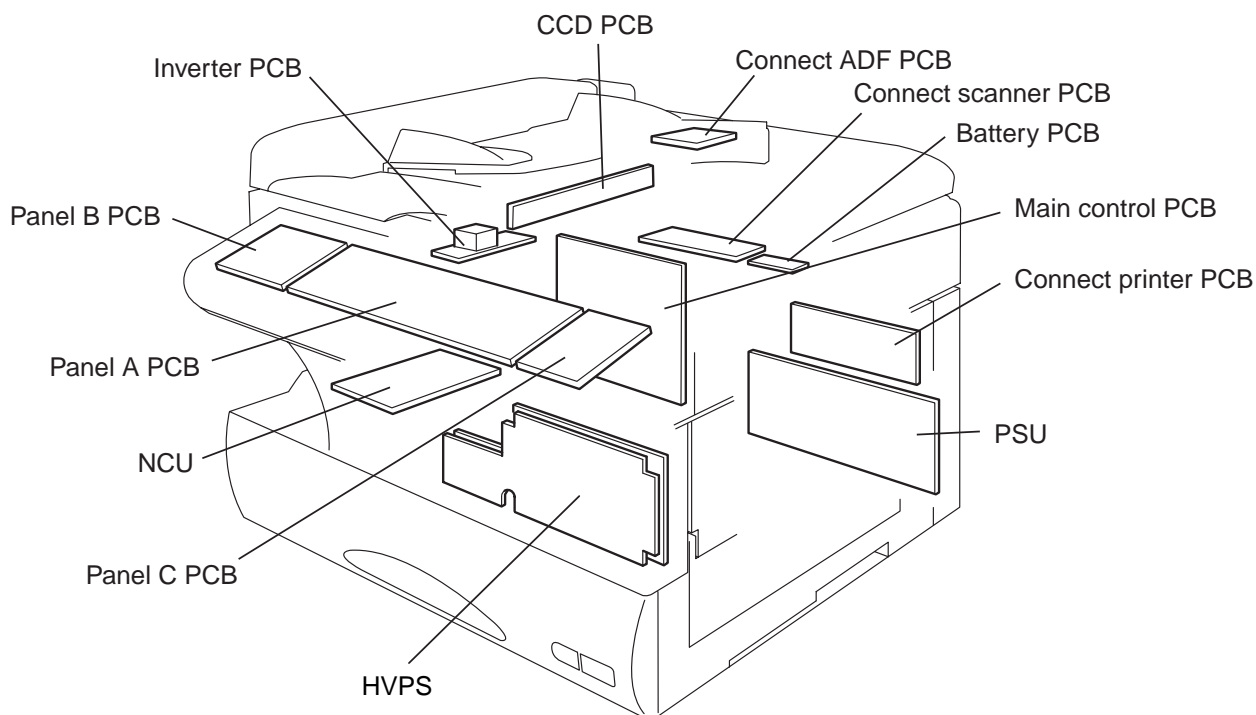

### MAIN CONTROL PCB


**Note:** Before changing the main control PCB, back up the user data (such as one-touch dial numbers).  
Confirm the JP1 and JP2 on the main control PCB are set to ON.

1. Remove the rear cover.
2. Remove four shield plate mounting screws.
3. Disconnect all connectors on the main control PCB.
4. Remove two main PCB mounting screws, and then remove the MAIN CONTROL PCB.

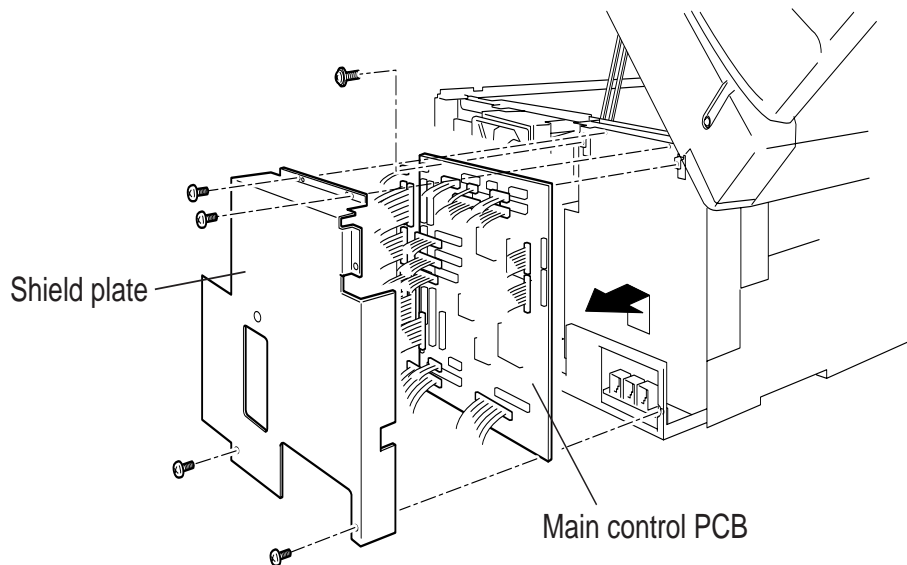


## NCU PCB

1. Remove the EXIT TRAY.
2. Remove the two NCU PCB mounting screws and one F.G. wire mounting screw.
3. Disconnect all connectors on the NCU PCB.
4. Remove the NCU PCB.

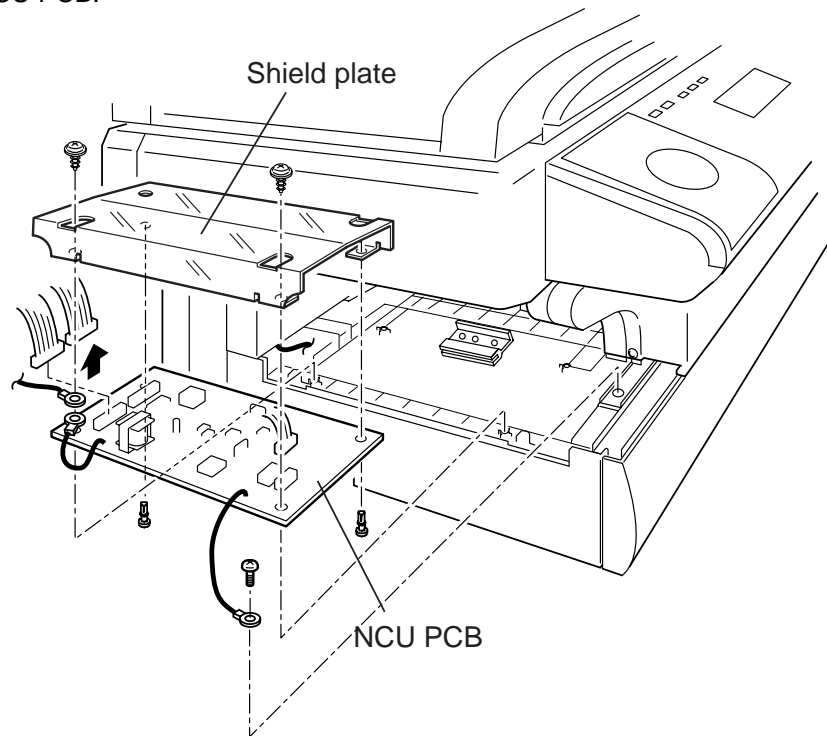


## MODULAR PCB

1. Remove the REAR COVER.
2. Remove four shield plate mounting screws, and then remove the SHIELD PLATE.
3. Disconnect all connectors on the Modular PCB.
4. Remove two modular PCB mounting screws, and then remove the MODULAR PCB.

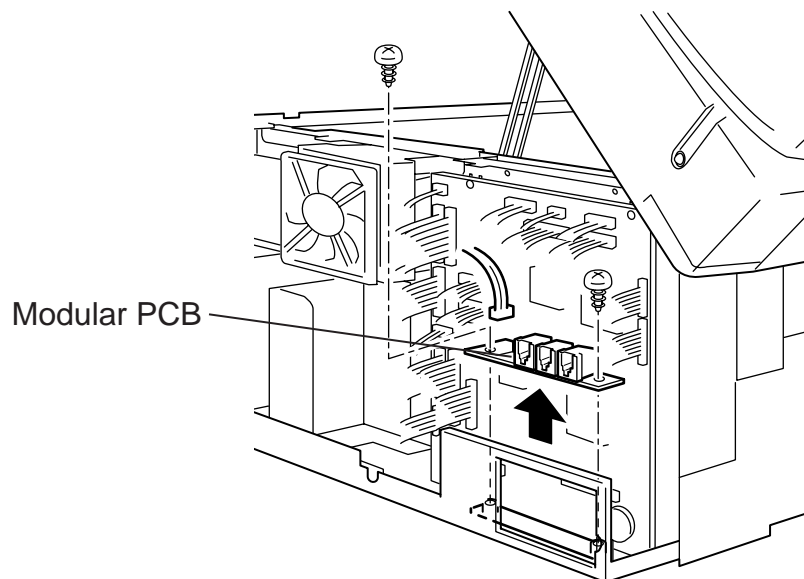


## POWER SUPPLY UNIT (PSU)

1. Remove the REAR COVER.
2. Remove two fan motor mounting screws, and then remove the FAN MOTOR.
3. Remove the duct mounting screw, and then remove the DUCT.

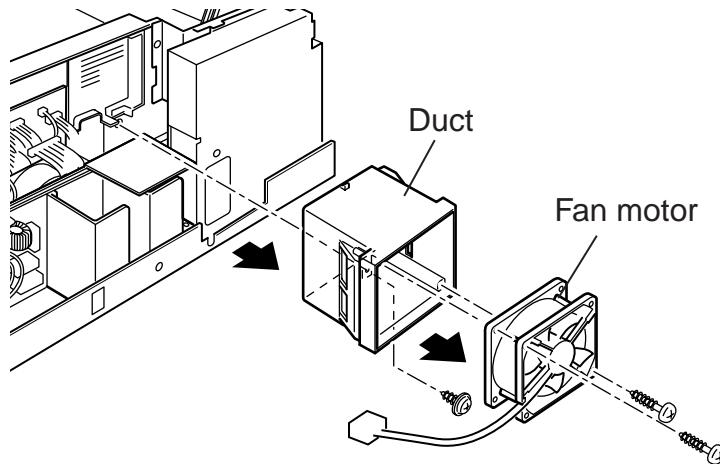


4. Disconnect two connectors on the PSU.
5. Remove the two F.G. wires.
6. Remove three PSU mounting screws, and then remove the PSU.

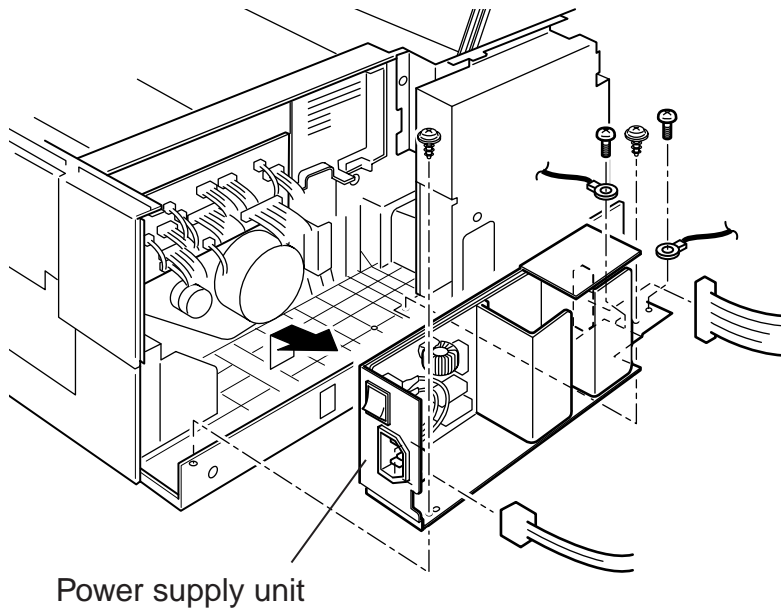


## HIGH VOLTAGE POWER SUPPLY (HVPS)

1. Open the top cover.
2. Remove the FRONT COVER.
3. Disconnect the connector on the HVPS and remove five HVPS mounting screws, then remove the HVPS.

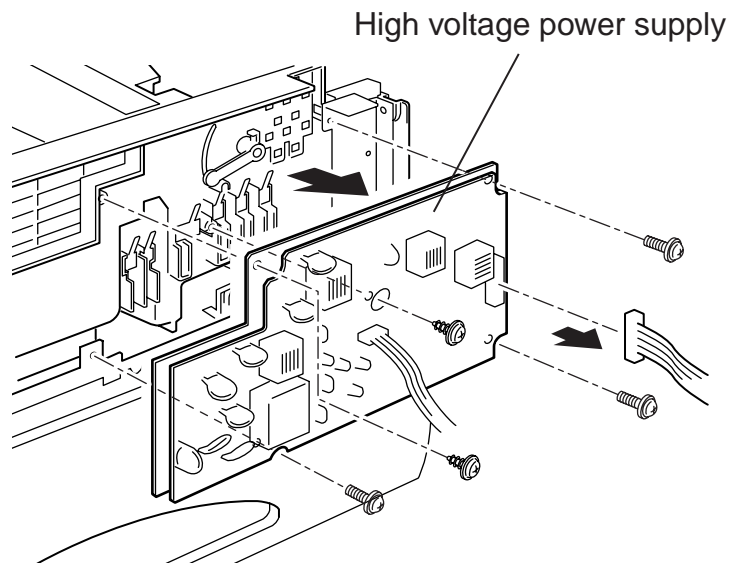


## CONNECT PRINTER PCB

1. Remove the REAR COVER.
2. Remove two PCB shield mounting screws, and then remove the PCB shield.
3. Disconnect all connectors on the CONNECT PRINTER PCB.
4. Remove three printer connect PCB mounting screws and the tab, and then remove the CONNECT PRINTER PCB.

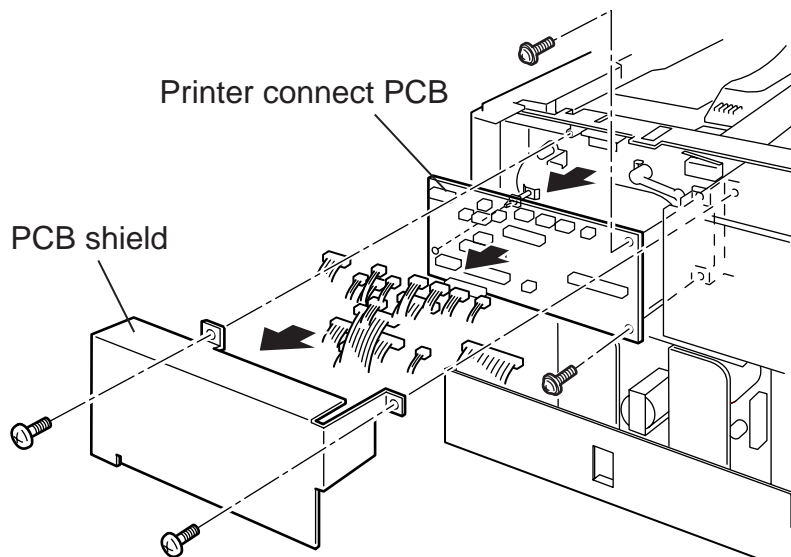


## PANEL A, B, C and LCD


1. Remove the TOP FRONT COVER.
2. Remove three panel cover mounting screws, and then remove the PANEL COVER.

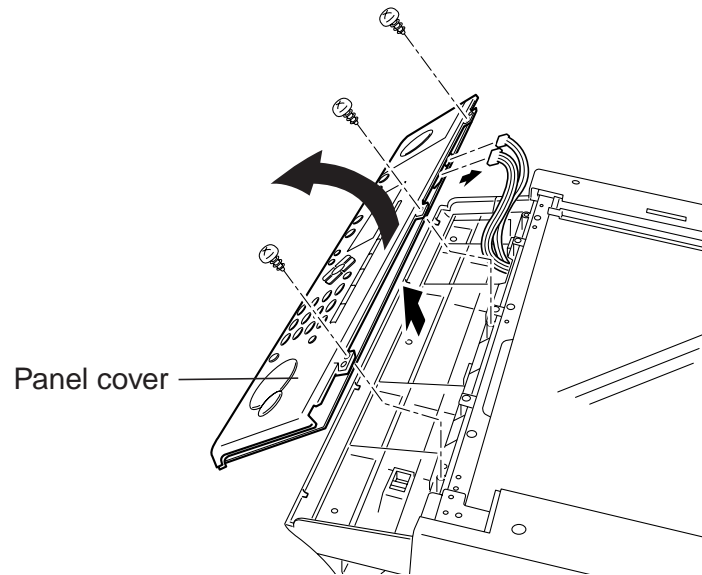

3. Disconnect two connectors between PANEL A and B, PANEL B and C.
4. Disconnect the film harness of the LCD.
5. Remove all PANEL PCB mounting screws.
6. Separate the PANEL A, B and C.

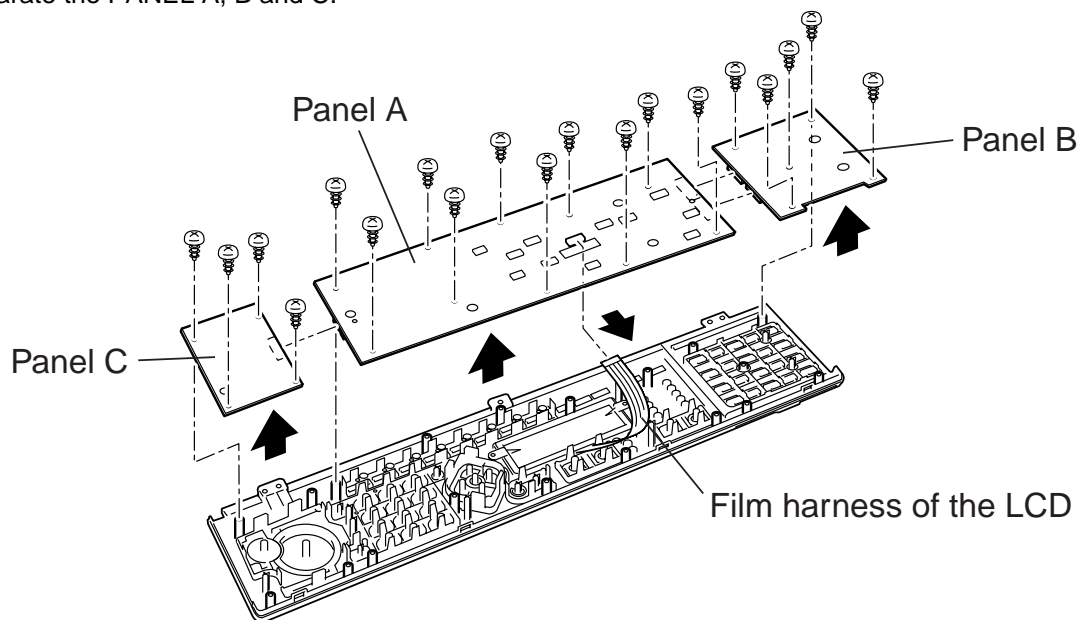


7. Remove two LCD support mounting screws, and then remove the LCD.

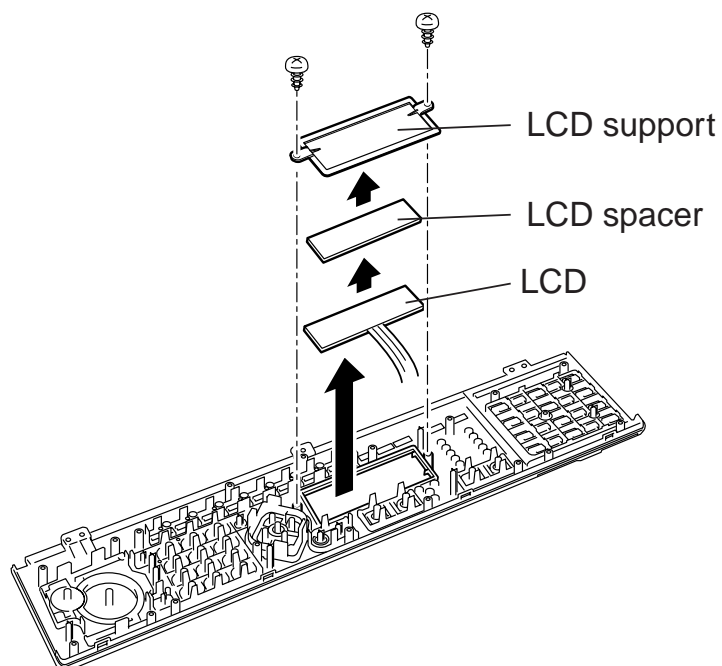


### CONNECT SCANNER PCB

1. Remove the TOP FRONT COVER, THE TOP RIGHT COVER and the TOP LEFT COVER.
2. Remove the bottom corner cover mounting screw, and then remove the BOTTOM CORNER COVER.
3. Remove the Hinge screw.

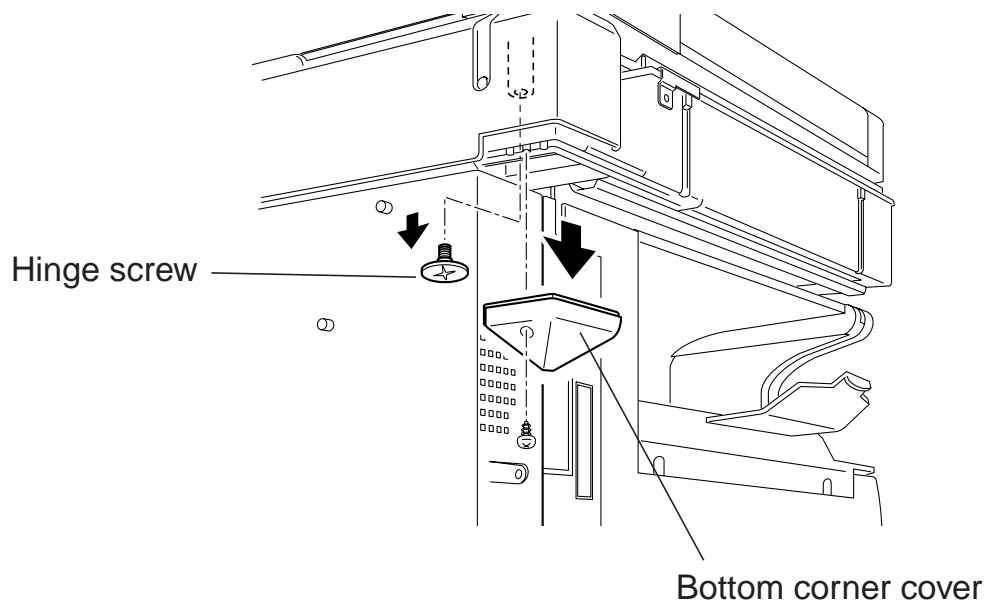


4. Open the top cover and remove the Hinge screw as shown.

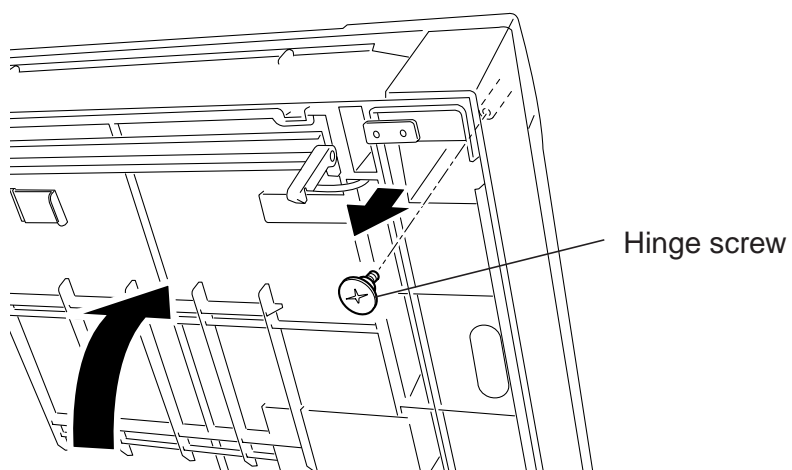


4. Remove the harness holder mounting screw, and then remove the HARNESS HOLDER.


5. Remove the PLATEN COVER assembly.

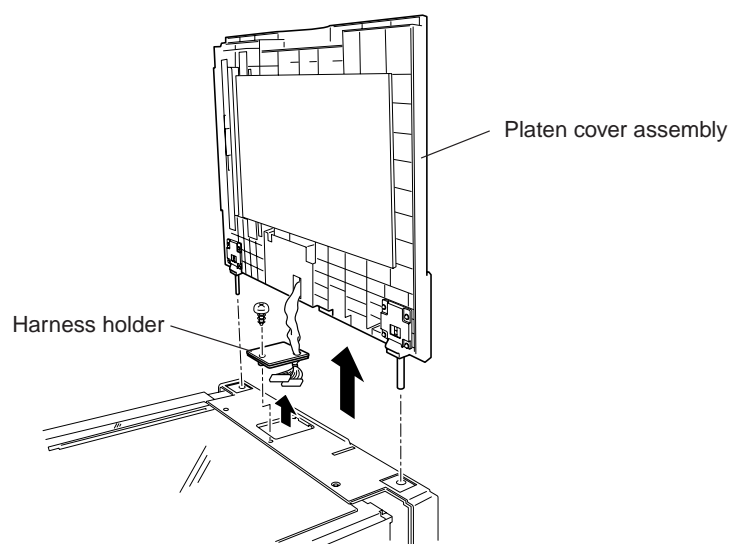

6. Remove two screw covers. Then remove four top rear cover mounting screws, and then remove the TOP REAR COVER.

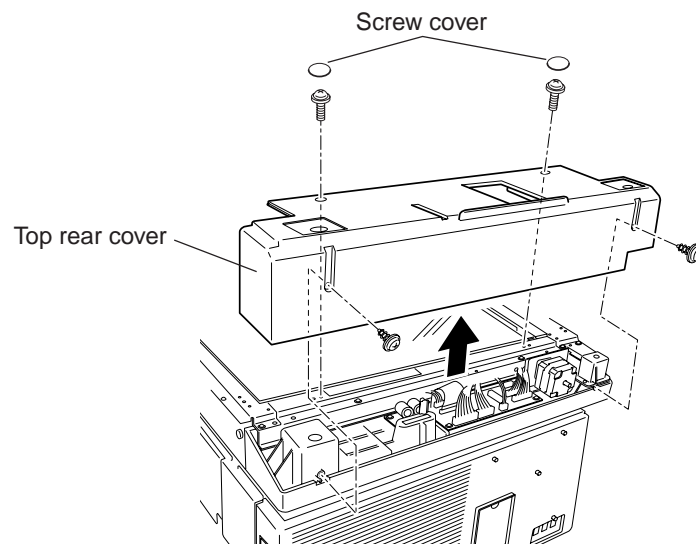


7. Disconnect all connectors on the connect scanner PCB, and then remove the CONNECT SCANNER PCB.

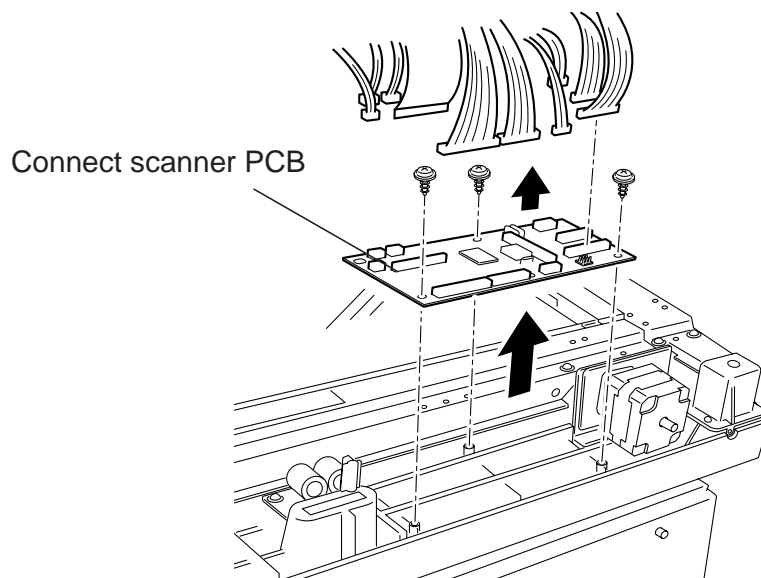

## BATTERY PCB


1. Perform the procedure of step1 through 6 in "CONNECT SCANNER PCB," page 5.18.
2. Disconnect the connector on the BATTERY PCB and remove the BATTERY PCB mounting screw, then remove the BATTERY PCB.

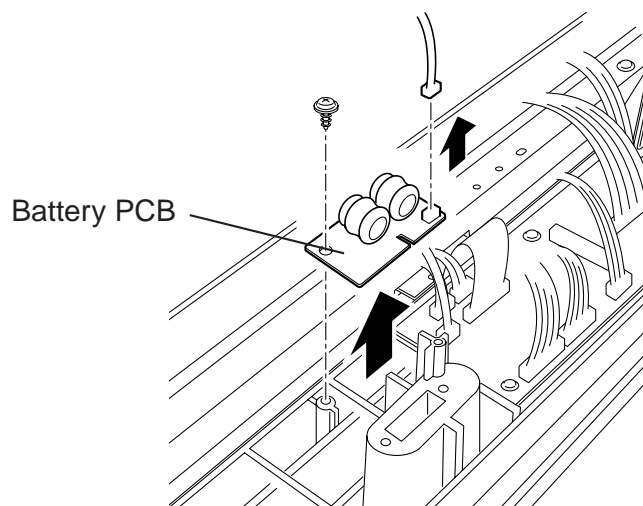




## INVERTER PCB

1. Remove the TOP FRONT COVER and the TOP RIGHT COVER.
2. Remove the FBS glass.
3. Remove two LENS COVER mounting screws, and then remove the LENS COVER.
4. Disconnect two connectors on the INVERTER PCB and remove two INVERTER PCB mounting screws, then remove the INVERTER PCB.

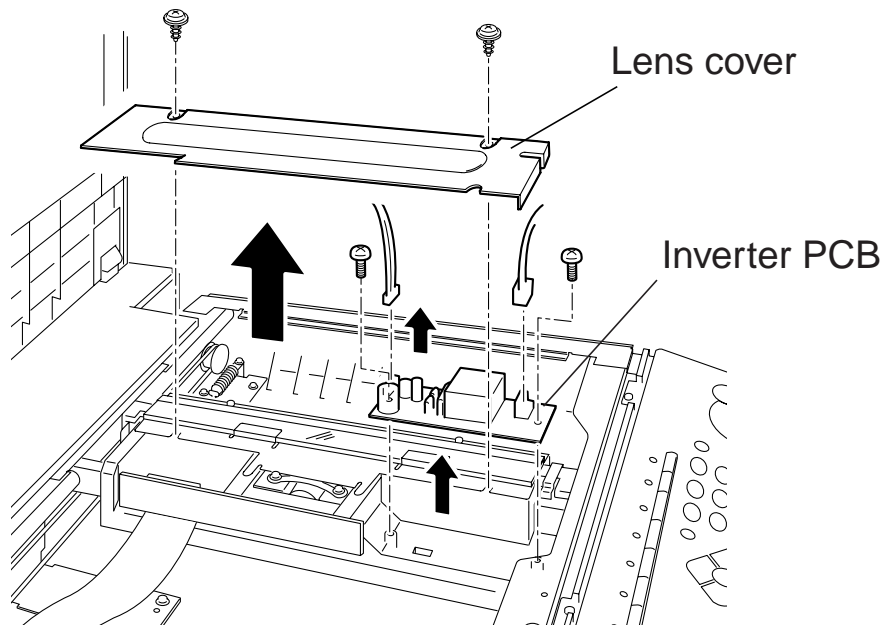


## LAMP

1. Perform the procedure of step 1 through 3 in “**INVERTER PCB**,” see above.
2. Disconnect the connector for the LAMP on the INVERTER PCB.
3. Remove the two Scanner Upper Cover mounting screws, then remove the SCANNER UPPER COVER and COVER GLASS.
4. Release the two locking tabs, and then remove the LAMP HOLDER.
5. Remove the LAMP.

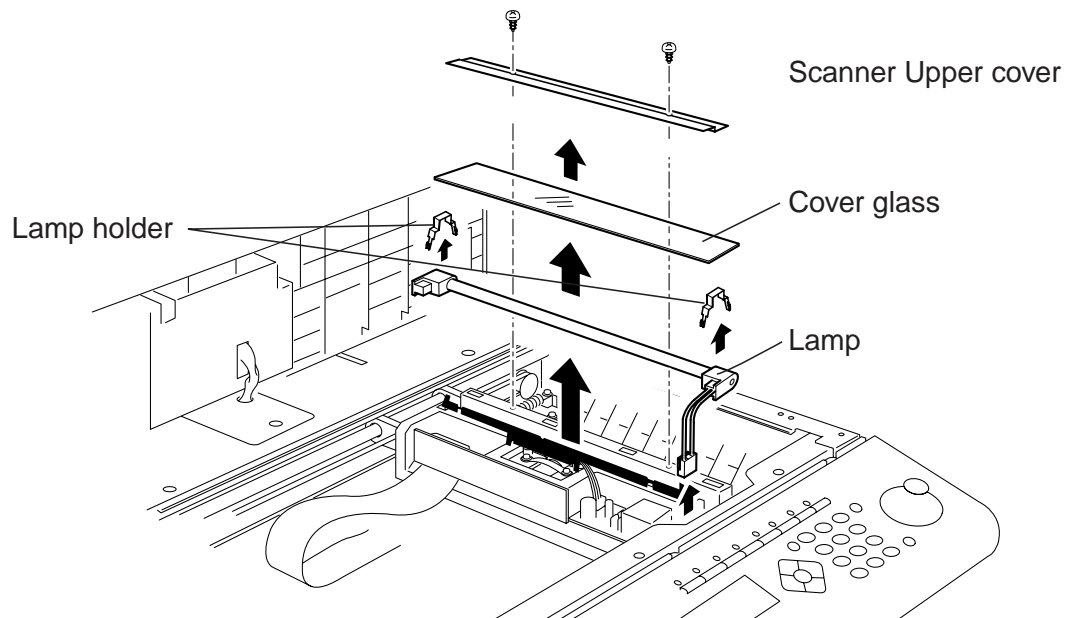


## CONNECT ADF PCB

1. Remove the TX SIDE COVER R.
2. Disconnect all connectors on the CONNECT ADF PCB.
3. Remove the ground wire.
4. Remove two CONNECT ADF PCB mounting screws, and then remove the CONNECT ADF PCB.

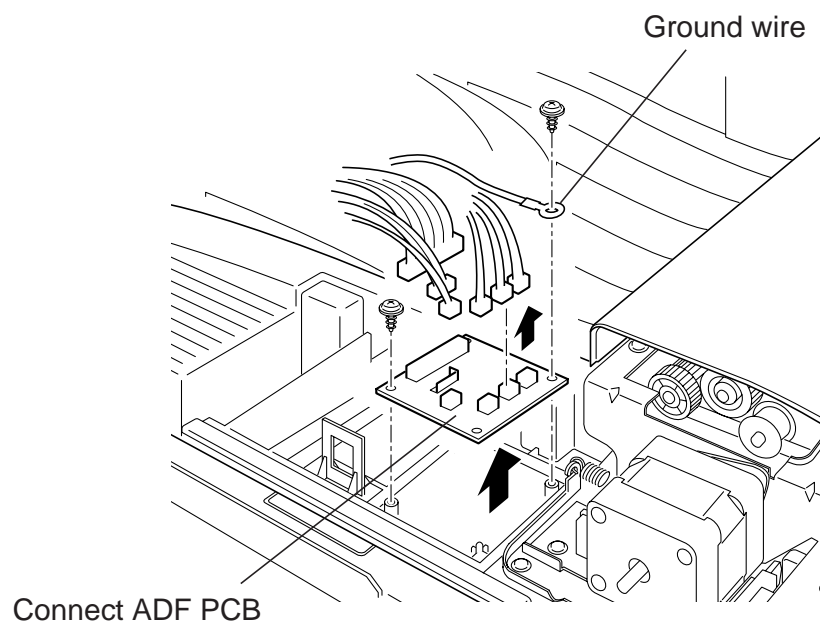

## 5.2.3 Sensors

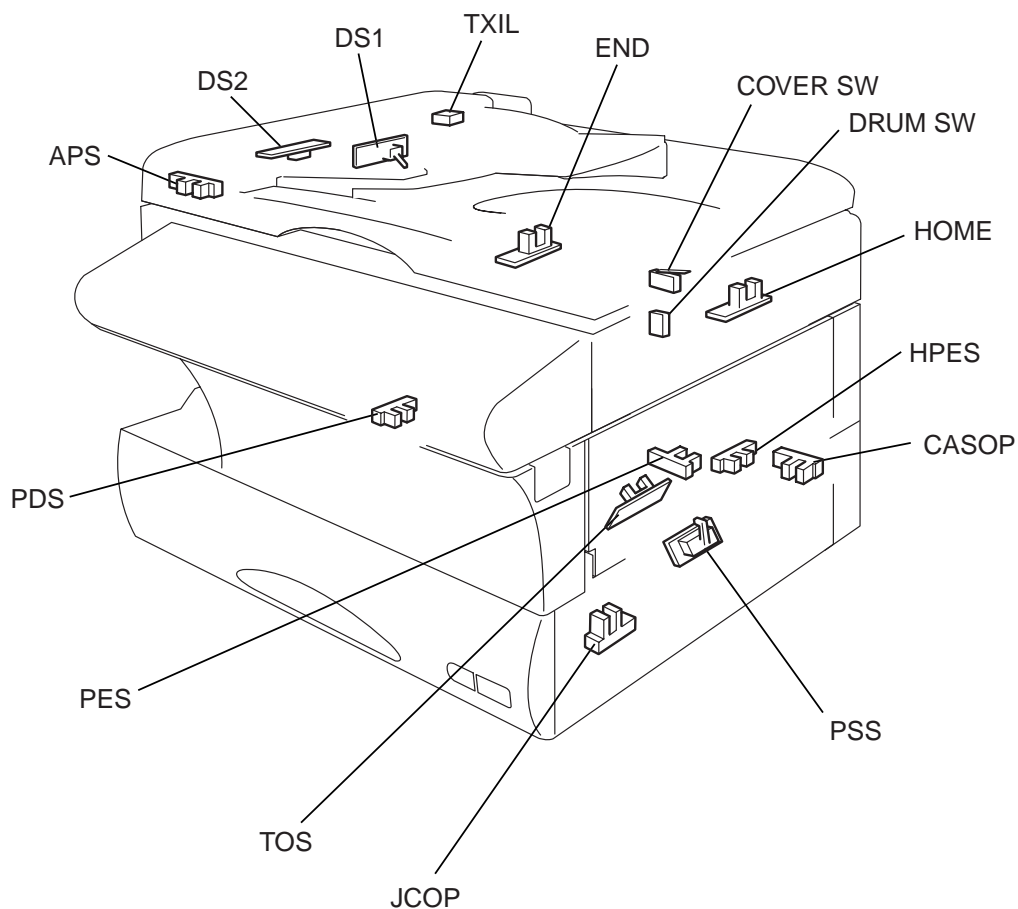

### **TXIL**

Refer to "TXIL(ADF), DS1/DS2," page 5-25.

### **HOME**

Refer to "HOME sensor / END sensor," page 5-32.

### **END**

Refer to "HOME sensor / END sensor," page 5-32.

### **APS**

Refer to "ADF permit sensor," page 5-28.

### **DS1**

Refer to "TXIL(ADF), DS1/DS2," page 5-25.

### **DS2**

Refer to "TXIL(ADF), DS1/DS2," page 5-25.

### **PSS**

Refer to "PSS," page 5-45.

### **TOS**

Refer to "TOS," page 5-38.

### **PDS**

Refer to "PDS/Thermistor," page 5-41.

### **PES**

Refer to "PES," page 5-42.

### **HPES**

Refer to "HPES," page 5-39.

### **COVER SW**

Refer to "COVER SW," page 5-36.



### **CASOP**

Refer to "CASOP," page 5-36.


### **JCOP**

Refer to "JCOP," page 5-46.

5.2.4 Scanning section

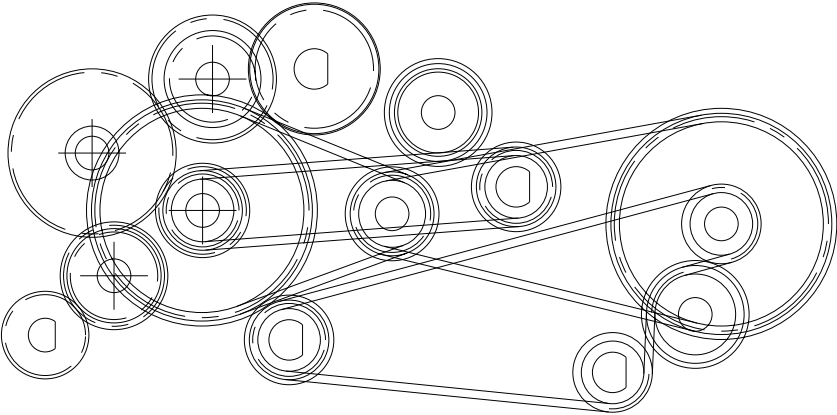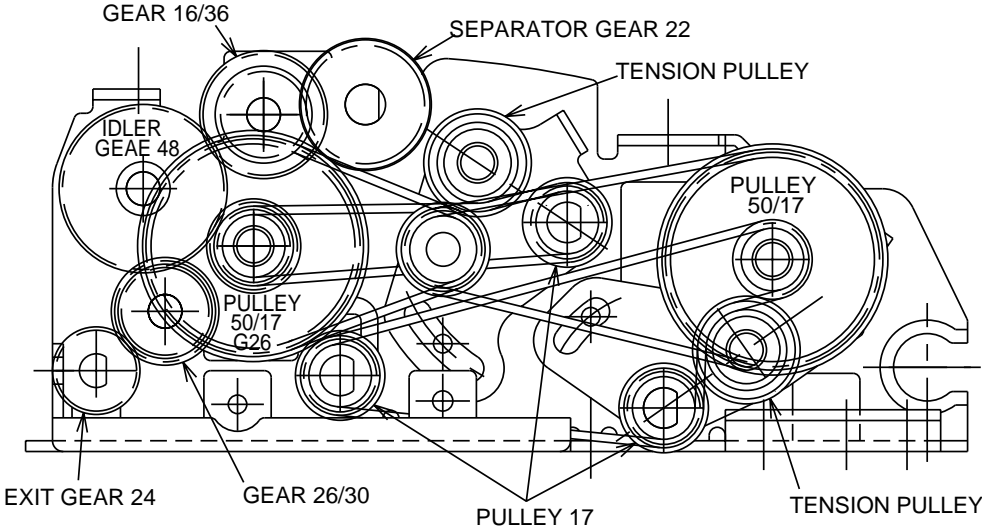


BELT INSTALLATION OF ADF SECTION

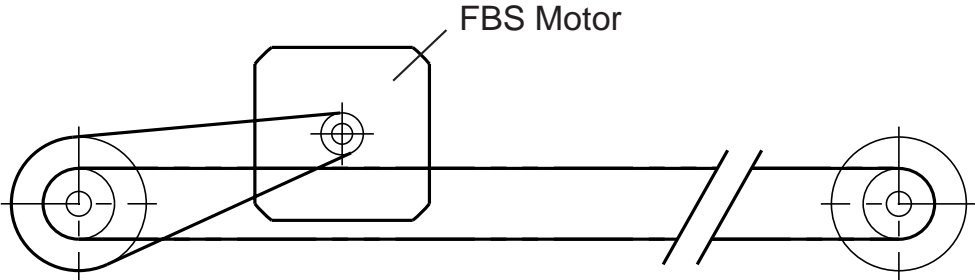

BELT INSTALLATION OF FBS SECTION


## TXIL (ADF) / DS1 / DS2

1. Remove the TX COVER.
2. Remove the sensor you want to remove.

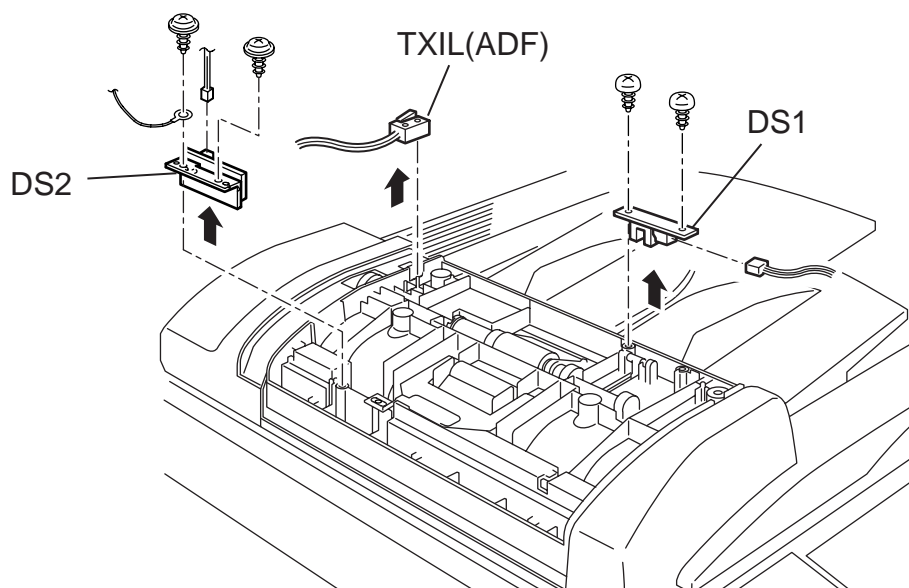


## SEPARATOR ROLLER ASSEMBLY

1. Remove the TX COVER.
2. Remove the E-ring, and then remove the separator gear 22.
3. Remove two E-rings, and then remove the SEPARATOR ROLLER Assembly.

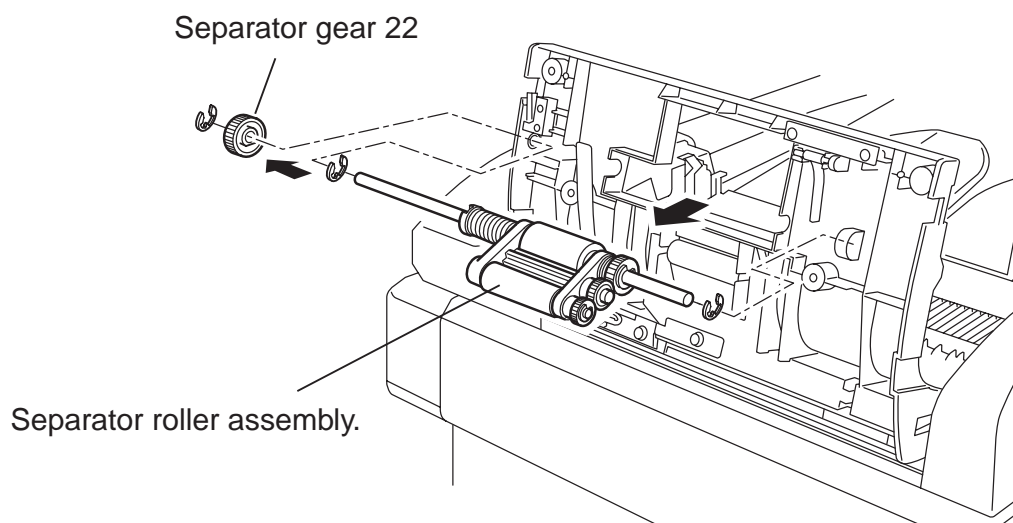


## RETARD ROLLER / TORQUE LIMITER

1. Open the Scanner Cover.
2. Remove the RETARD COVER.
3. Remove the RETARD ROLLER Assembly.

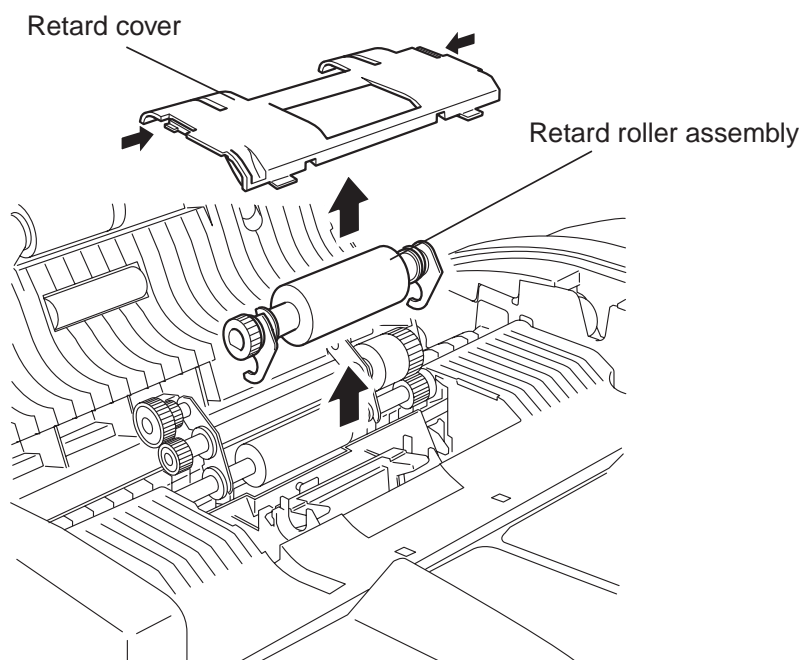


4. Remove two E-rings, and then remove the TORQUE LIMITER with the bracket.

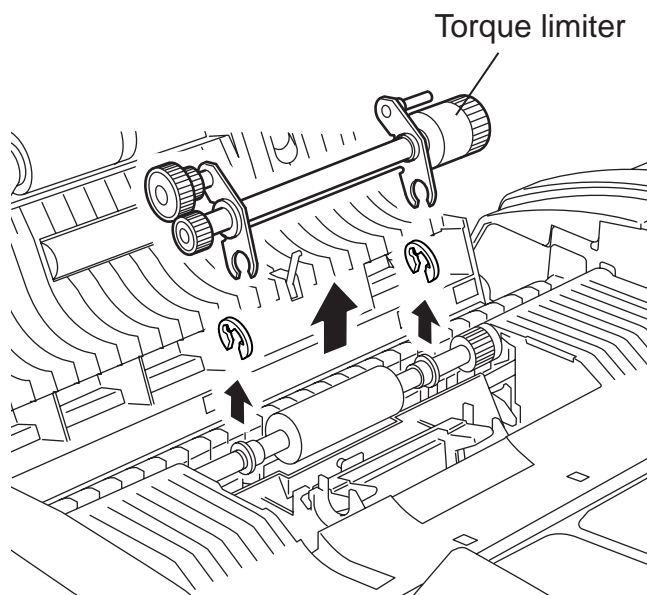


## ADF MOTOR

1. Remove the TX SIDE COVER R.
2. Remove SPRING C, then remove seven motor bracket mounting screws.
3. Remove the MOTOR BRACKET and ADF MOTOR.

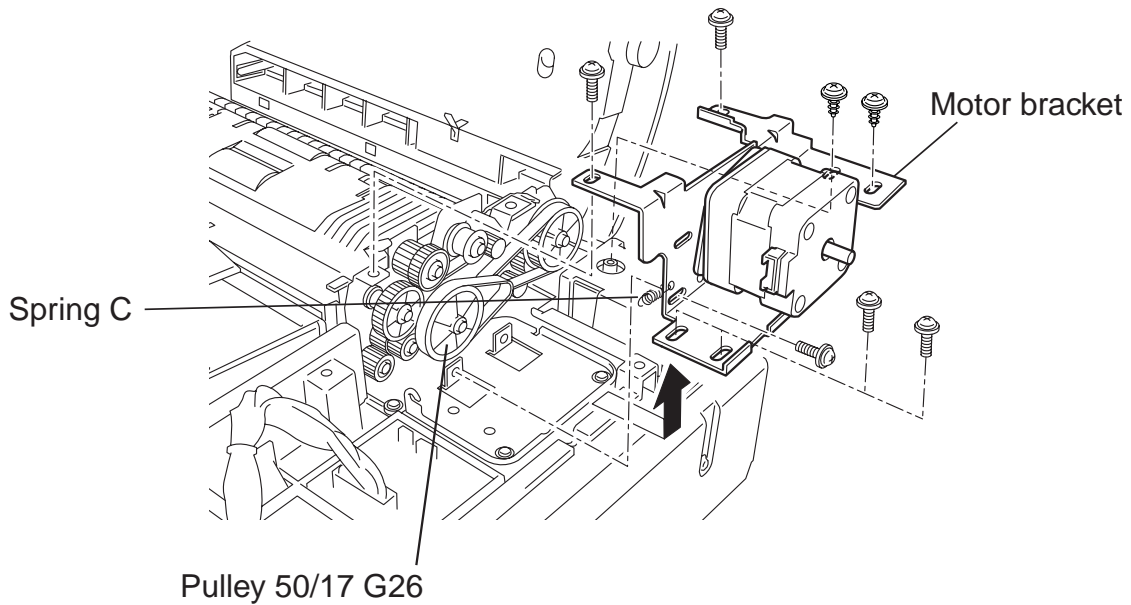


## FEED ROLLER A

1. Remove the TOP SIDE COVER R and F.
2. Remove the ADF MOTOR.
3. Pull out the PULLEY 50/17 G26.
4. Remove the F.G. wire mounting screw.
5. Remove the E-ring, and then remove the PULLEY 17.
6. Remove the E-ring on the other side, and then remove the INNER GUIDE A assembly.

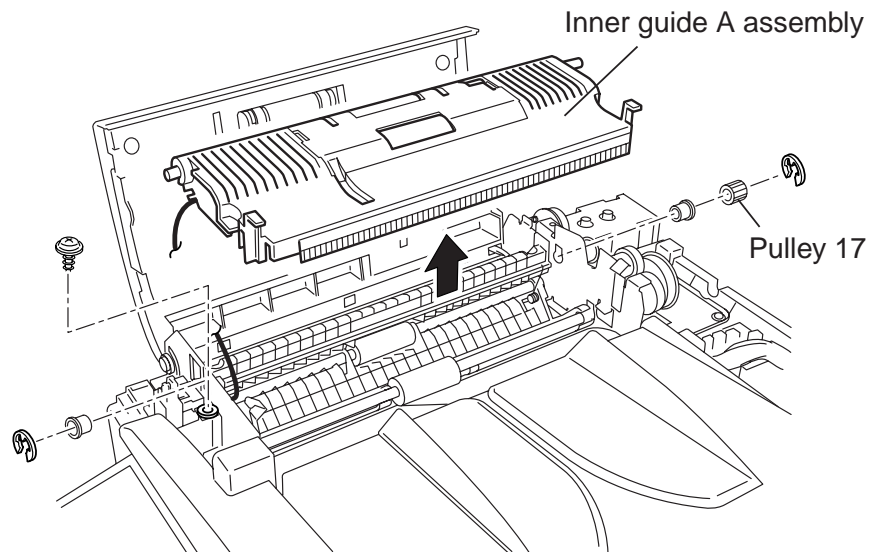


7. Remove the RETARD COVER, RETARD ROLLER assembly and TORQUE LIMITOR.
8. Remove the FEED ROLLER A from the INNER GUIDE A assembly.

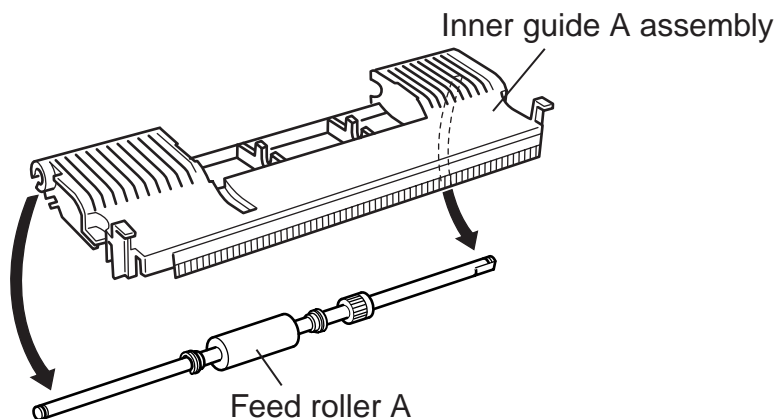


### ADF PERMIT SENSOR (APS)

1. Remove the TX SIDE COVER F and R.
2. Remove the Scanner Cover Assembly.
3. Remove two APS BRACKET mounting screws, and then remove the APS BRACKET and the APS FEELER. Disconnect the connector of the APS.

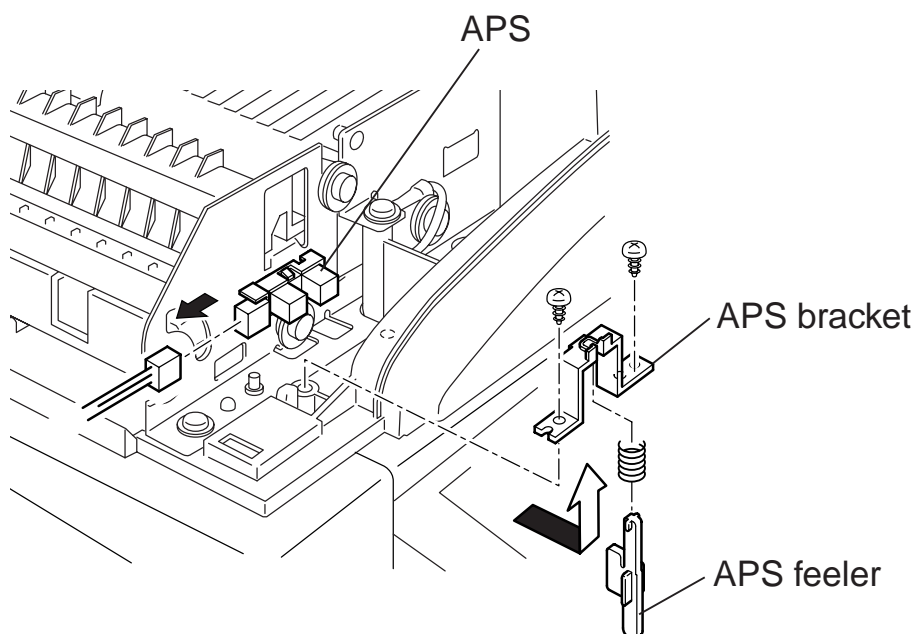




4. Remove two INNER GUIDE B mounting screws, and then remove the INNER GUIDE B.
5. Release three tabs, and then remove the APS.

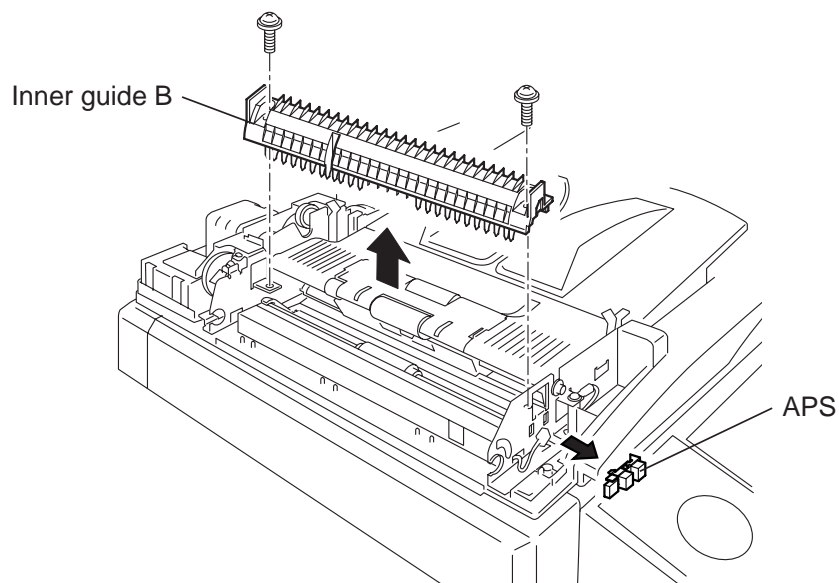

## FEED ROLLER B


1. Remove the TX SIDE COVER R and F.
2. Remove the ADF MOTOR.
3. Remove the Scanner Cover Assembly.
4. Remove two INNER GUIDE B mounting screws, and then remove the INNER GUIDE B.
5. Remove the APS.
6. Remove two E-rings on the right and left of the FEED ROLLER B, and then remove the PULLEY 17 and bearings. Also, remove the two GUIDE SPRINGS.

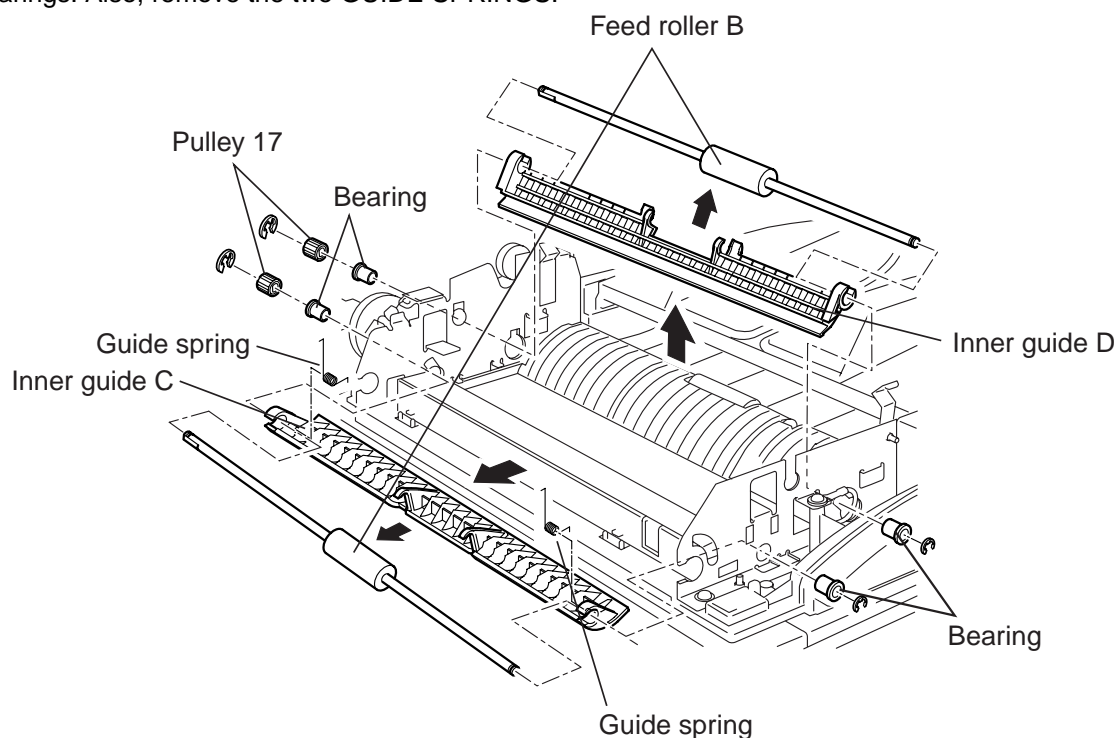


7. Remove the INNER GUIDE C.
8. Remove the INNER GUIDE D.
9. Remove the FEED ROLLER B.

## EXIT ROLLER


1. Remove the TX SIDE COVER R.
2. Remove two E-rings, and then remove the EXIT GEAR 24 and the Bearings.

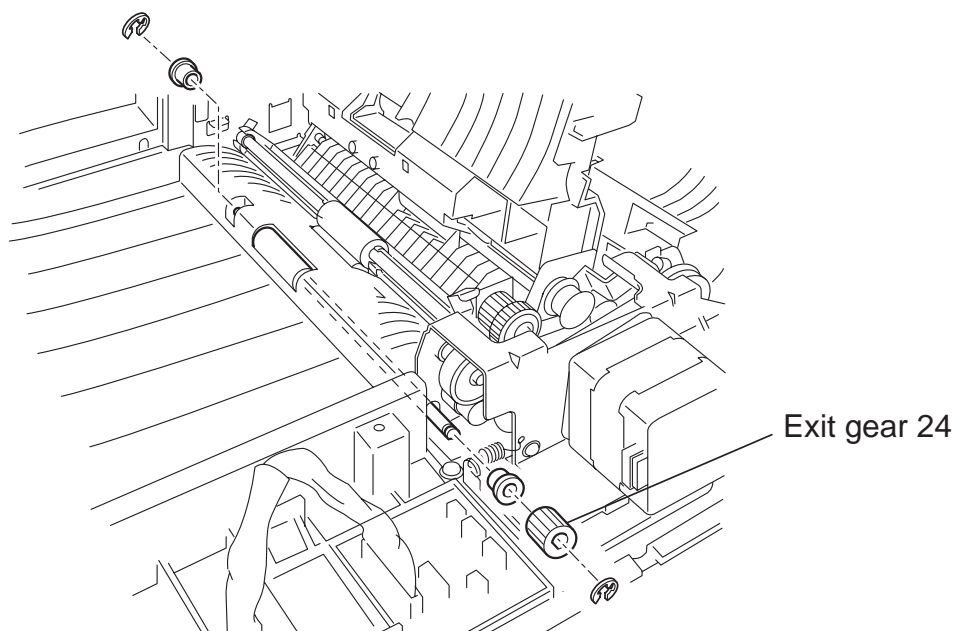

3. Open the Platen Cover. Remove two PLATEN SHEET mounting screws, and then remove the PLATEN SHEET as shown.

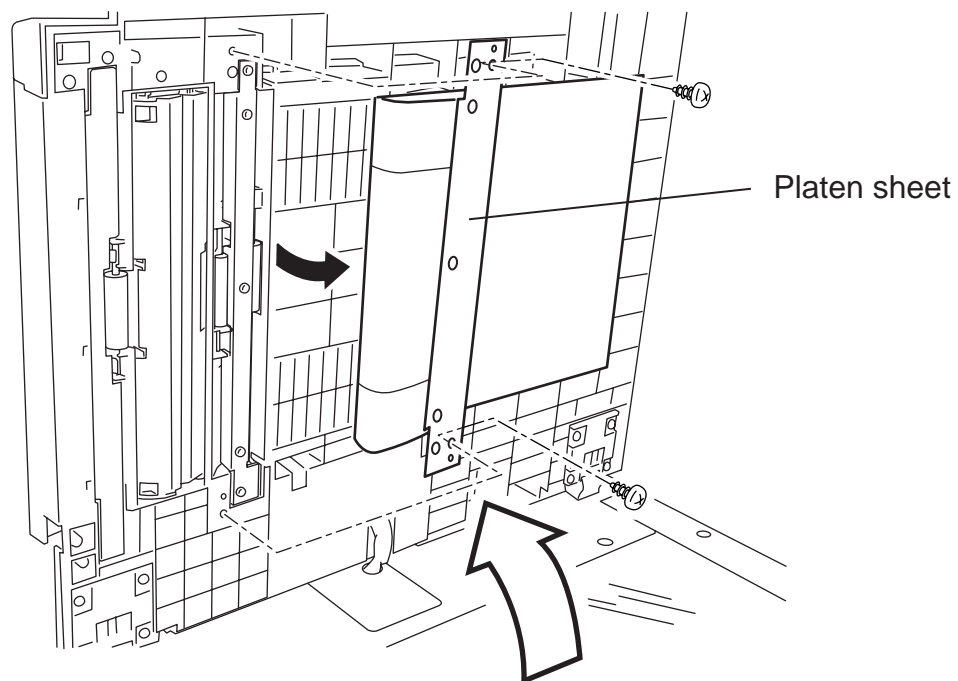


4. Remove five PLATEN STAY B mounting screws, and then remove the PLATEN STAY B.

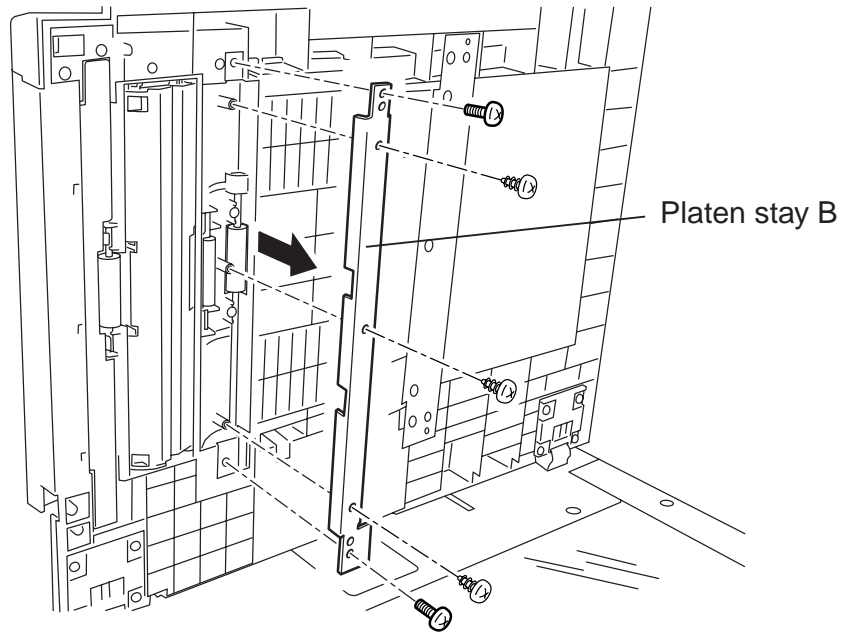


5. Remove two PRESS SPRING D.

6. Remove the EXIT ROLLER.

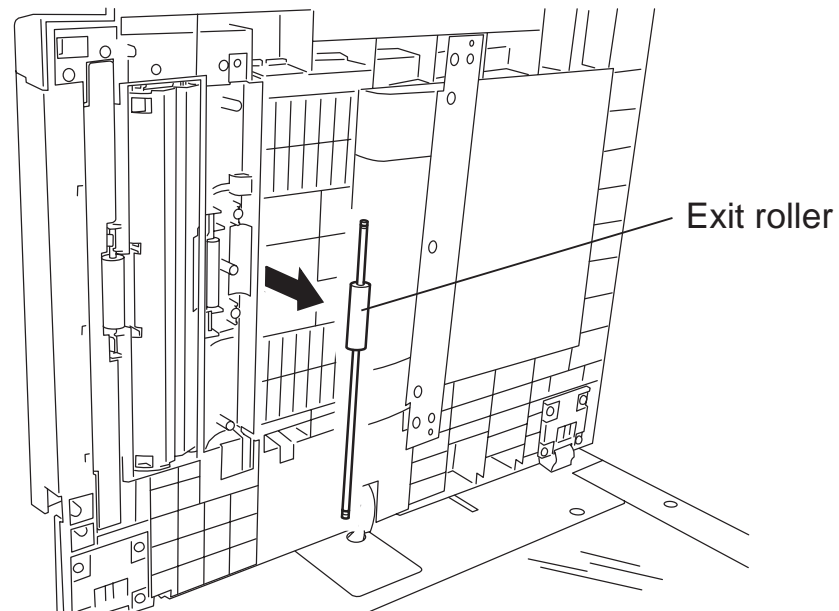


## HOME SENSOR / END SENSOR

1. Remove the TOP FRONT COVER, THE TOP RIGHT COVER and the TOP LEFT COVER.
2. Remove the PANE and the CONTACT GLASS.
3. Remove the HARNESS COVER C mounting screw, and then remove the HARNESS COVER C.
4. Remove the END SENSOR. Remove the HOME SENSOR.

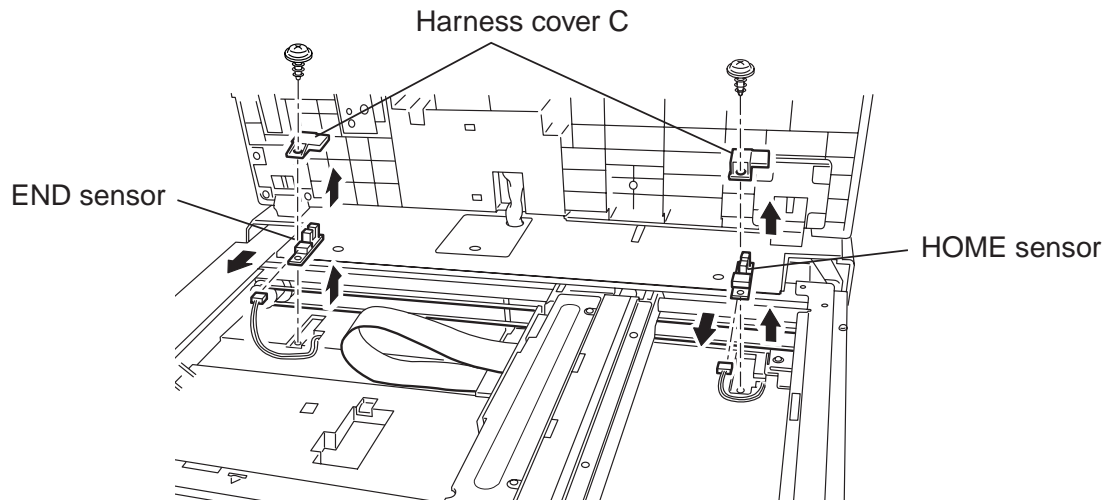


## FBS MOTOR

1. Remove the TOP FRONT COVER, the TOP RIGHT COVER and the TOP LEFT COVER.
2. Remove the BOTTOM CORNER COVER.
3. Remove the HINGE SCREW and the HARNESS HOLDER mounting screw, and then remove the PLATEN COVER Assembly.
4. Remove the TOP REAR COVER.
5. Remove the GROUND PLATE mounting screw, and then remove the GROUND PLATE.  
Remove nine LEFT ANGLE mounting screws, and then remove the LEFT ANGLE.
6. Remove four HINGE STUD mounting screws, and then remove the HINGE STUD.

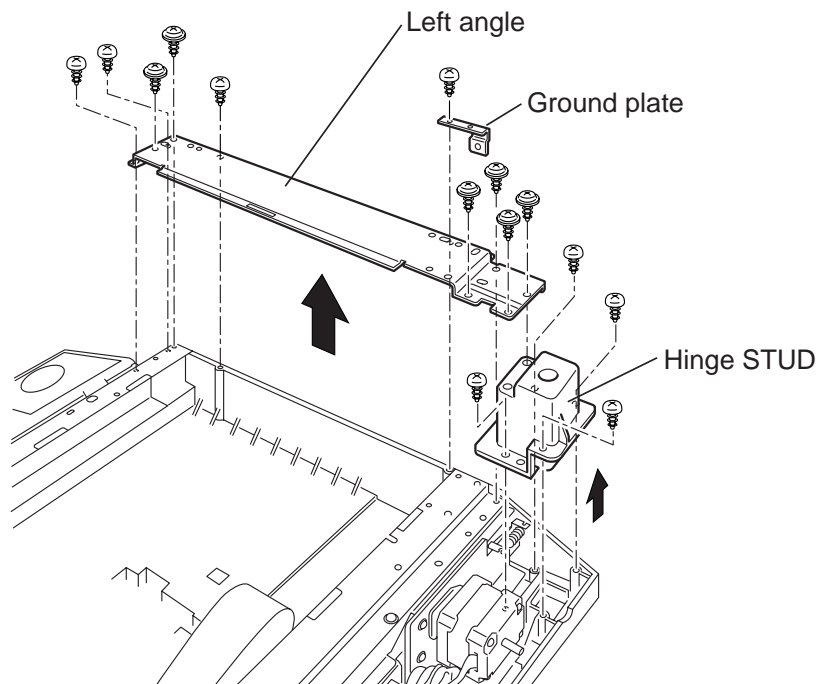


7. Loosen the REAR ANGLE mounting screw.  
Remove three FBS MOTOR BRACKET mounting screws.  
Remove the BELT.  
Remove the FBS MOTOR with the bracket.

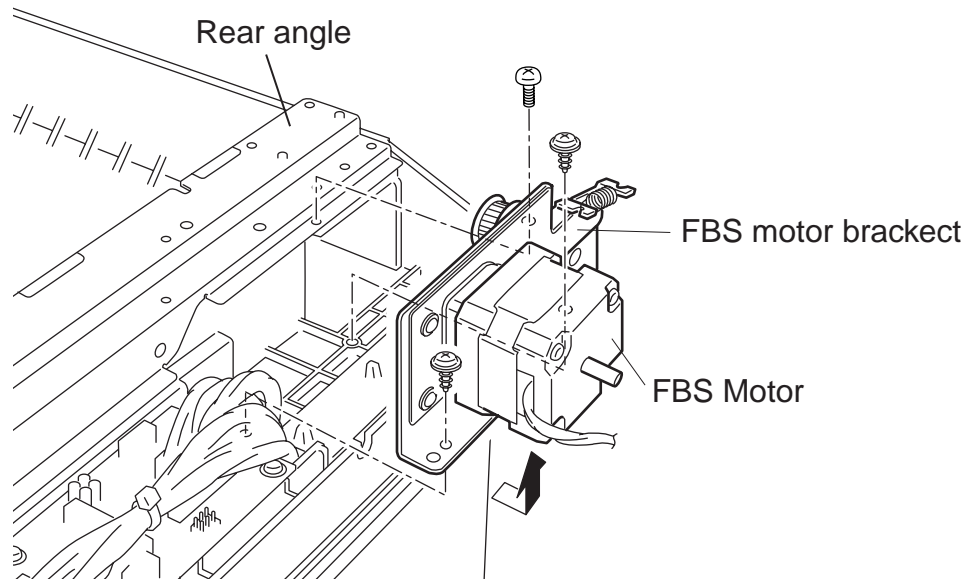


## SCANNER ASSEMBLY


1. Remove the TOP FRONT COVER, THE TOP RIGHT COVER and the TOP LEFT COVER.
2. Remove the BOTTOM CORNER COVER.
3. Remove the HINGE SCREW and the HARNESS HOLDER mounting screw, and then remove the PLATEN COVER Assembly.
4. Remove the TOP REAR COVER.
5. Remove the GROUND PLATE mounting screw, and then remove the GROUND PLATE.

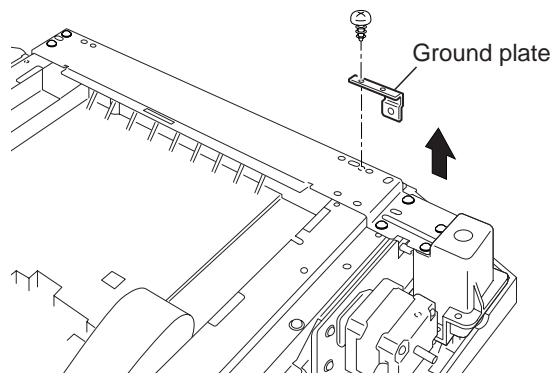

6. Remove the BELT RETAINER mounting screw.
7. Remove two LENS COVER mounting screws, and then remove the Flat Cable from the CCD PCB.

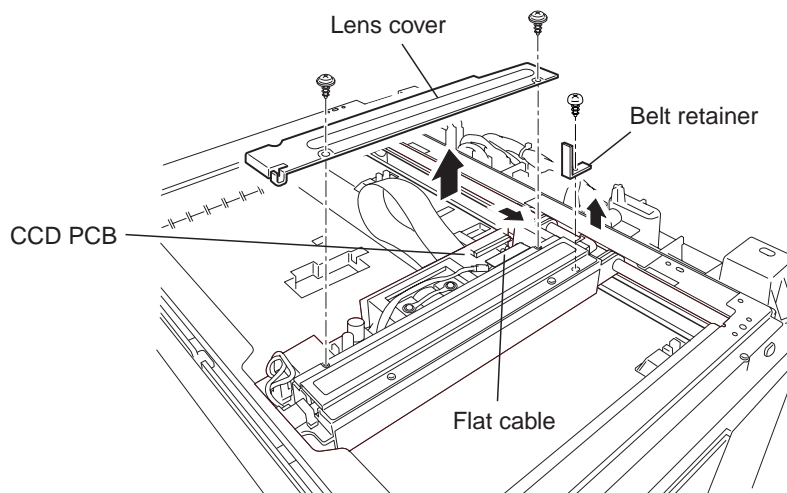


8. Slide out the GUIDE ROD as shown below. Then remove the SCANNER ASSEMBLY.

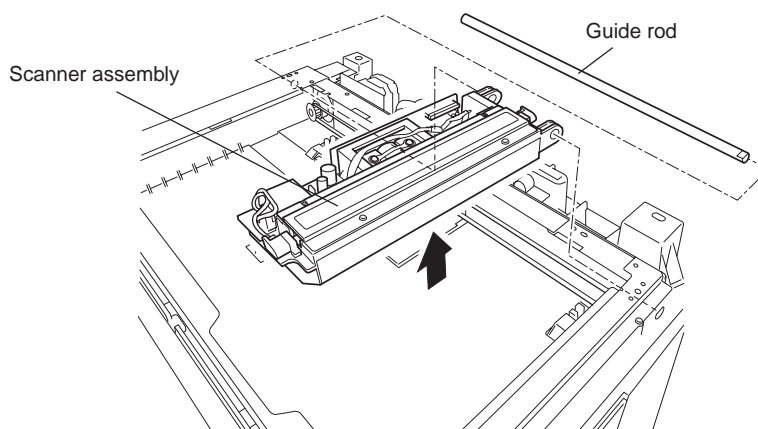

## KNOB


1. Open the TOP COVER.
2. Remove the SPRING.
3. Remove the small screw with a precision screwdriver.
4. Pull out the KNOB.

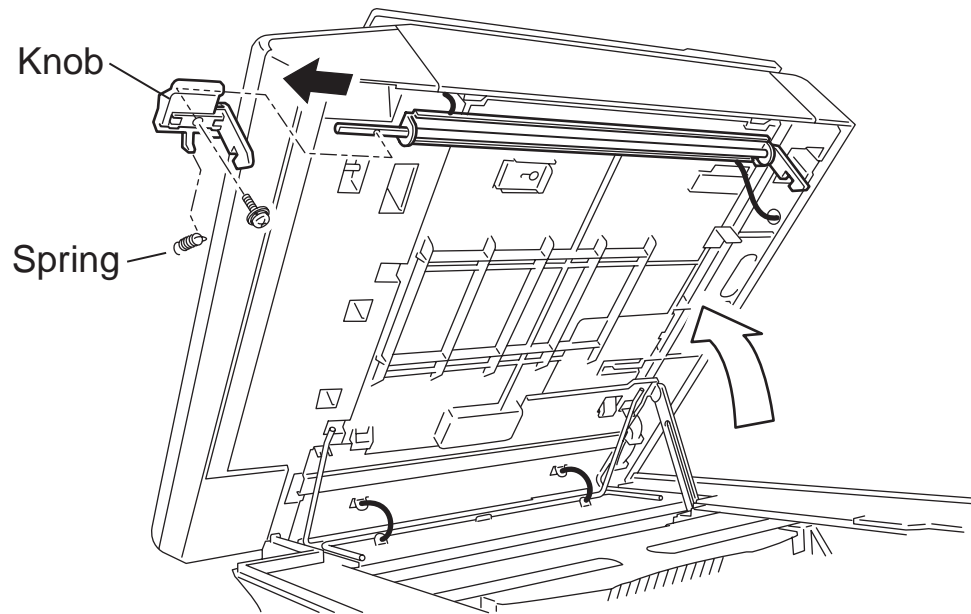

## 5.2.5 Printer section


### COVER SWITCH

1. Remove the REAR COVER.
2. Remove the CONNECT PRINTER PCB.
3. Remove two COVER SWITCH mounting screws, and then remove the COVER SWITCH.

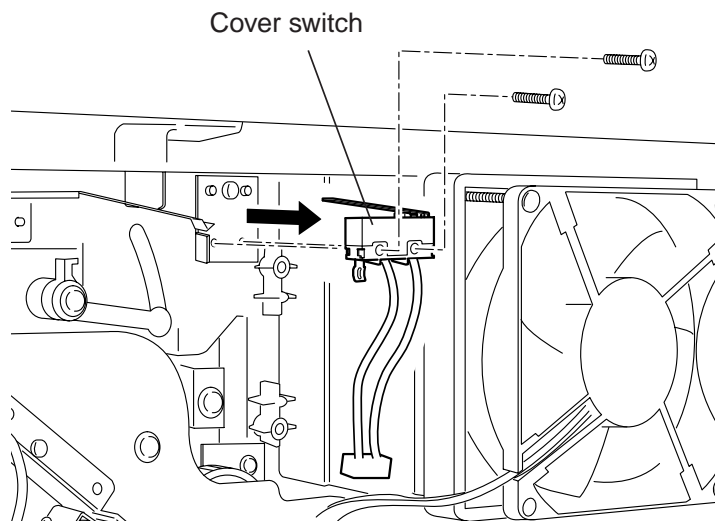

### CASOP


1. Remove the REAR COVER.
2. Remove the CONNECT PRINTER PCB.
3. Remove the PSU.
4. Remove the CASOP mounting screw, and then remove the CASOP.

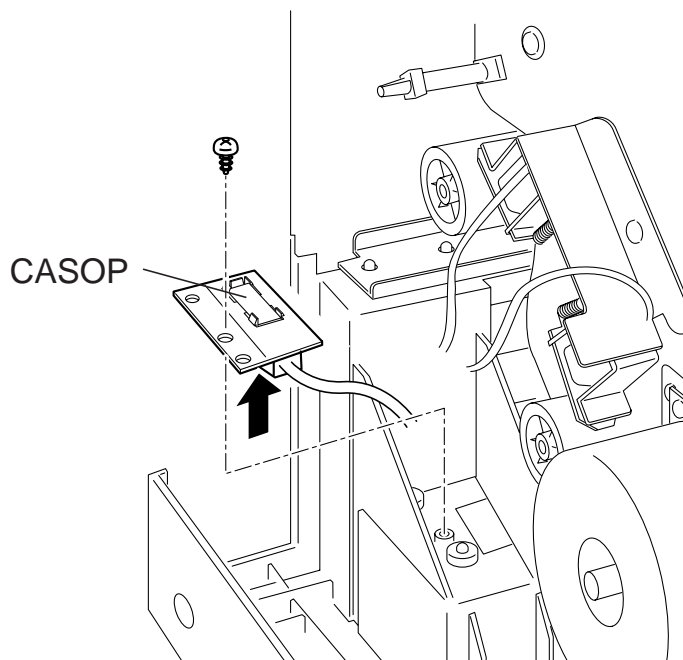




## SOLENOID

1. Remove the REAR COVER.
2. Remove the CONNECT PRINTER PCB.
3. Remove the SOLENOID mounting screw, and then remove the SOLENOID.

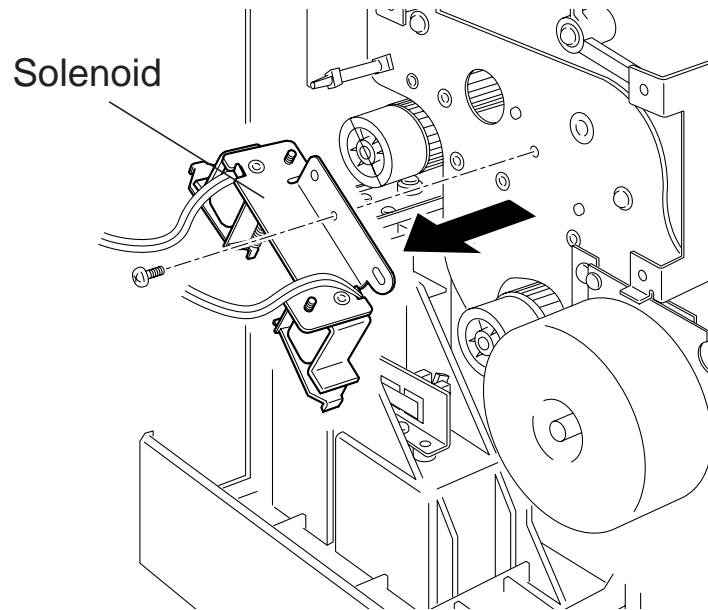


## RX MOTOR

1. Remove the REAR COVER.
2. Remove the CONNECT PRINTER PCB.
3. Remove the PSU.
4. Remove four RX MOTOR mounting screws, and then remove the RX MOTOR.

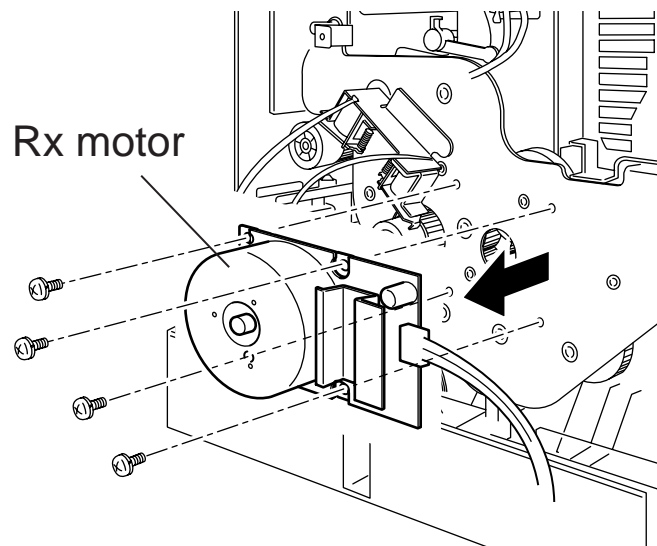


## DRIVE GEAR ASSEMBLY

1. Perform the procedure of step 1 through 3 in “RX MOTOR,” page 5.37.
2. Remove the SOLENOID.
3. Remove the four DRIVE GEAR Assembly mounting screws, then remove the DRIVE GEAR Assembly.

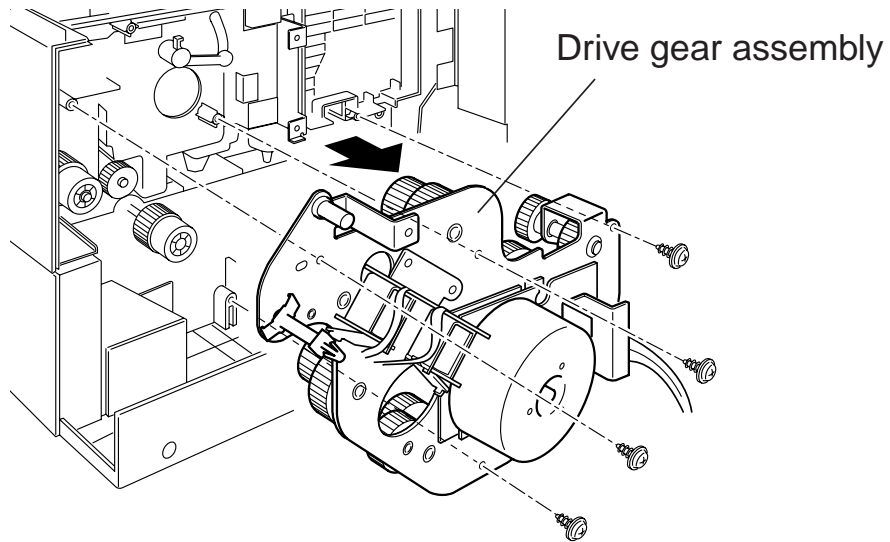


## TOS

1. Open the TOP COVER.
2. Remove the Toner Cartridge and Drum Cartridge.
3. Disconnect the connector of TOS.
4. Remove the two TOS mounting screws, then remove the TOS.

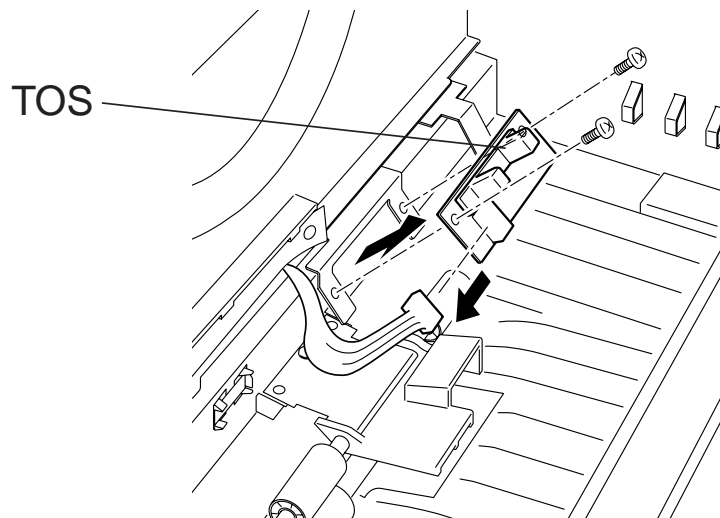


## PICK UP ROLLER MP

1. Remove the FRONT COVER, the REAR COVER and the RIGHT COVER.
2. Remove the bearing, and then remove the PICK UP ROLLER MP.

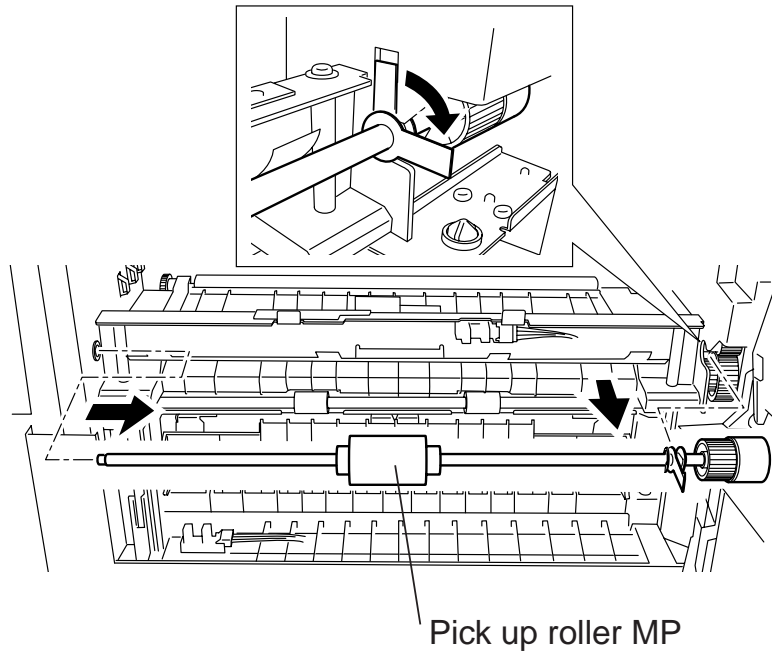


## HPES

1. Remove the FRONT COVER, the REAR COVER and the RIGHT COVER.
2. Remove the PICK UP ROLLER MP.
3. Disconnect the connector of HPES.
4. Remove the tab, and then remove the HPES.

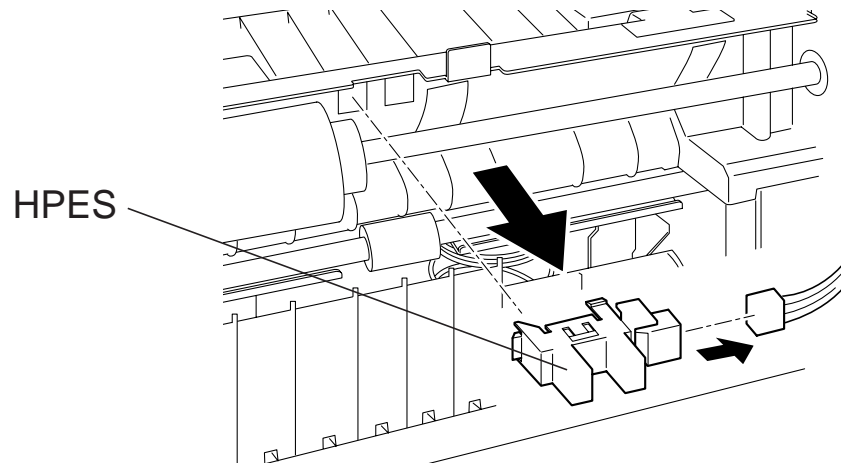

## IMAGE TRANSFER ROLLER


1. Remove the Toner Cartridge and the Drum Cartridge.
2. Remove the IMAGE TRANSFER ROLLER with TRANSFER BRACKET using the precision screwdriver as shown.

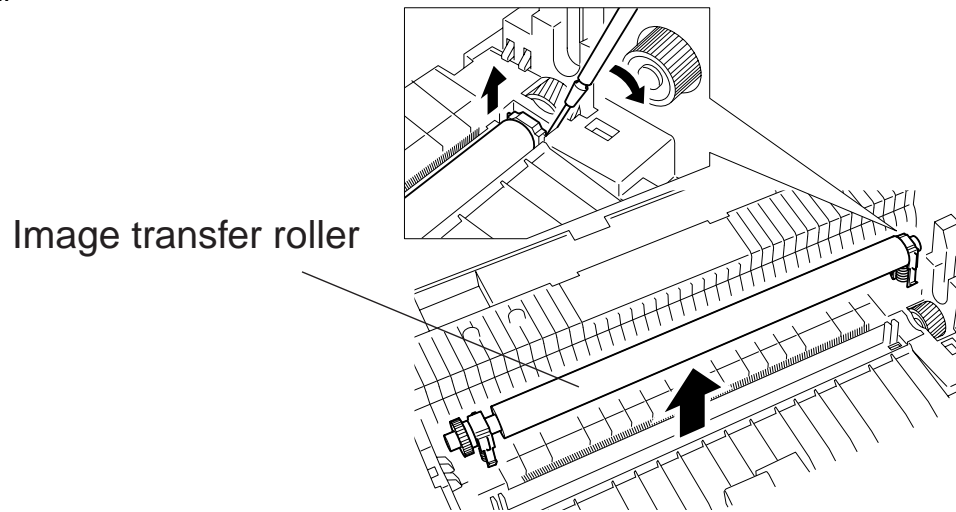

## FIXING UNIT


1. Remove the toner cartridge and the drum cartridge.
2. Remove the REAR COVER.
3. Disconnect the connector P1302 and P1307 from the CONNECT PRINTER PCB, and CN1 from the PSU. Also, remove the F.G. wire from the frame of PSU.
4. Remove two fixing unit mounting screws, and then remove the fixing unit.

**Note:** Be careful not to scratch the inside of the machine with the lower parts of the FIXING UNIT.

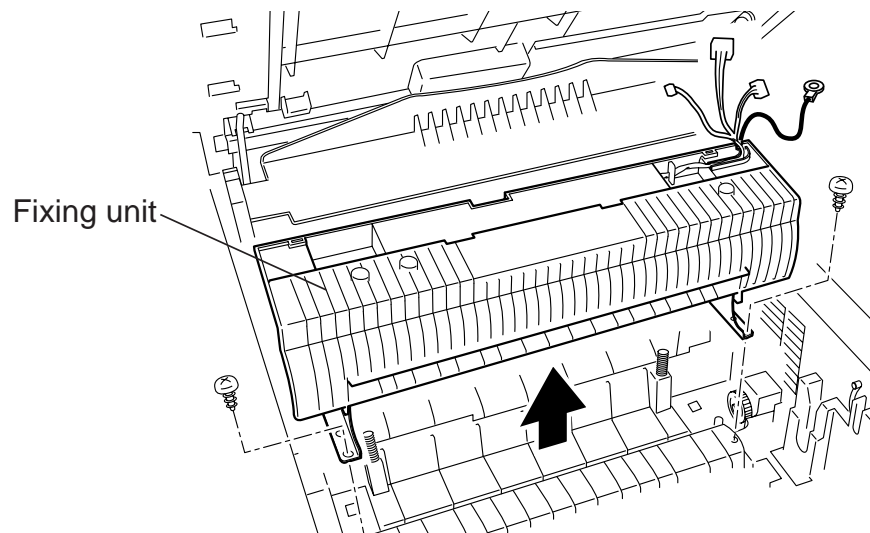


## PDS / Thermistor

1. Remove the FIXING UNIT.
2. Remove the FIXING UNIT COVER, and then remove the PDS or the thermistor.

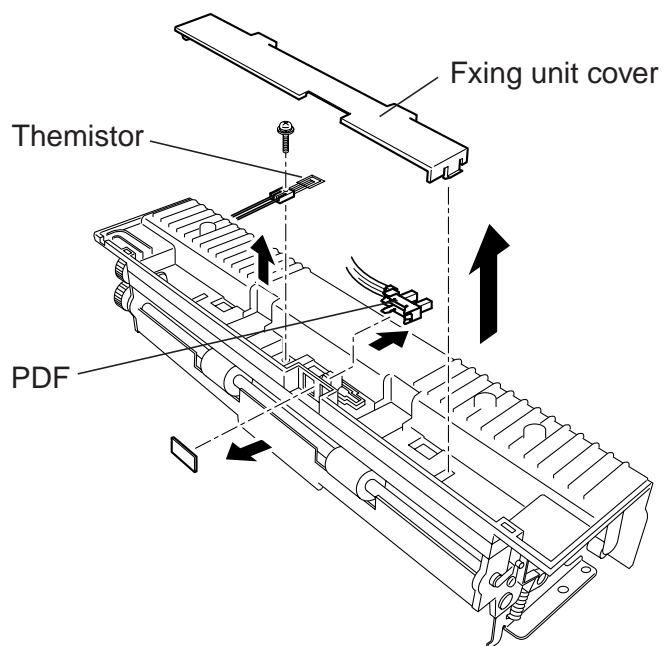


## EXIT ROLLER P

1. Remove the FIXING UNIT.
  2. Disassemble the FIXING UNIT to remove the EXIT ROLLER P.
- Note:** Do not bend the PLATE SPRING at removing or attaching the EXIT ROLLER P.

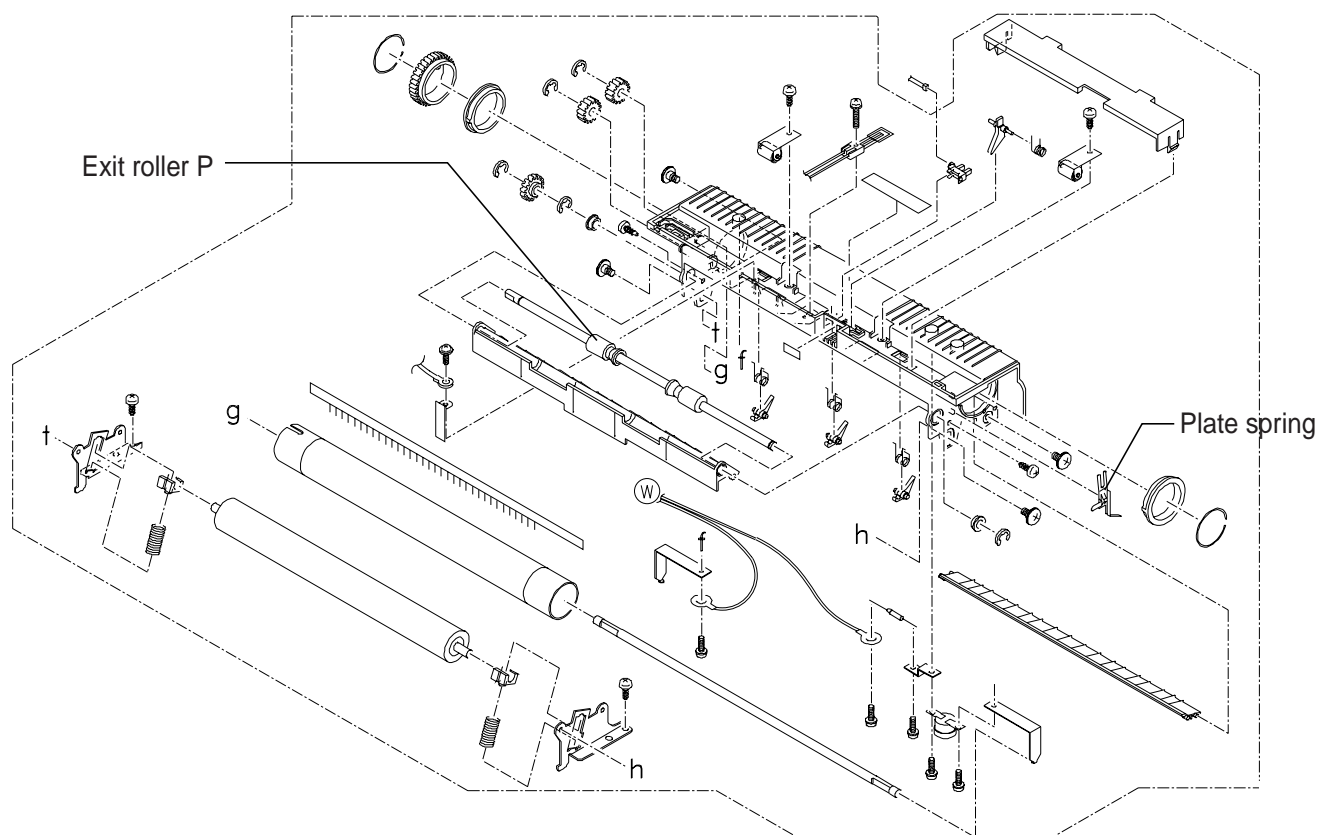


## PES

1. Pull out the cassette completely.
2. Remove the PES mounting screw under the cassette, and then remove the PES.  
Disconnect the connector.

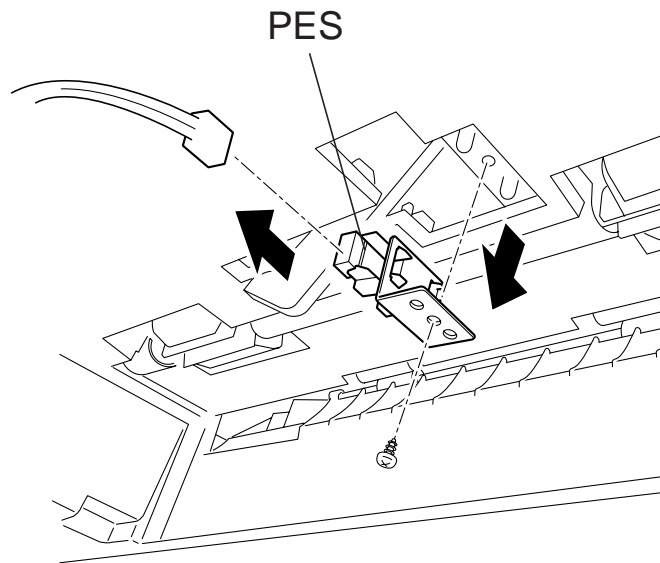


## PAPER PICK UP ROLLER

1. Pull out the cassette completely.
2. Pull out the pick up roller.

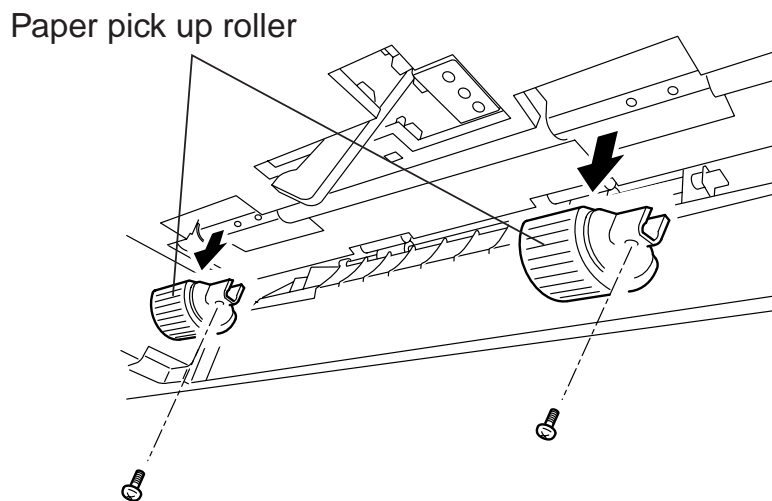


## FEED ROLLER BP

1. Remove the FRONT COVER, the REAR COVER and the RIGHT COVER.
2. Remove four MP bracket mounting screws, and then remove the MP BRACKET.
3. Remove the Feed B Bearing, and then slide out the FEED ROLLER BP.

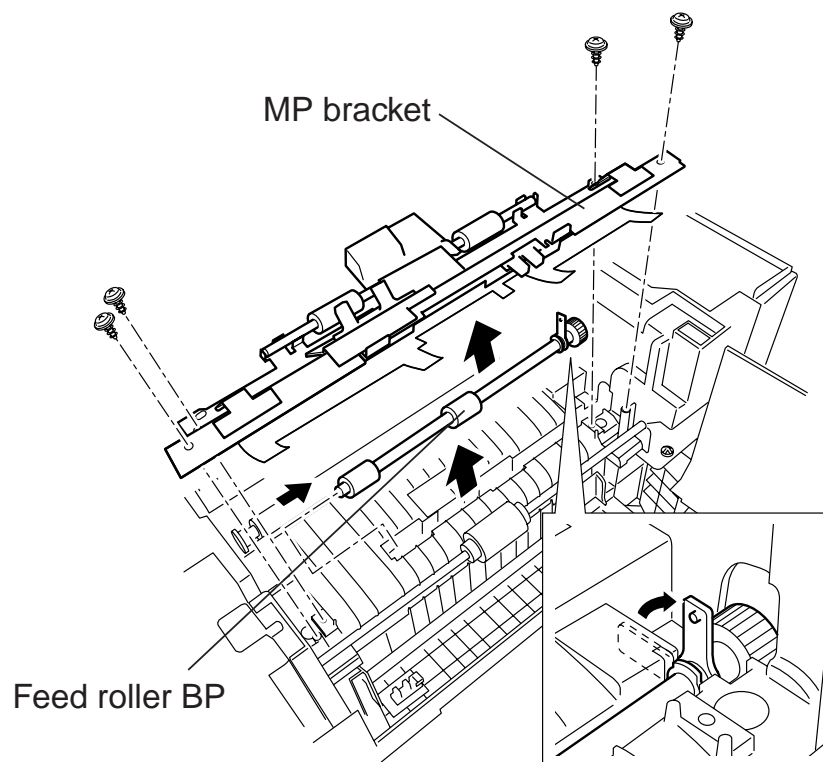


## FEED ROLLER AP

1. Remove the REAR COVER and FRONT COVER.
2. Remove the POWER SUPPLY UNIT.
3. Remove the CONNECT PRINTER PCB.
4. Remove the DRIVE GEAR ASSEMBLY.
5. Remove the HVPS.
6. Remove the MAIN FRAME mounting screws.

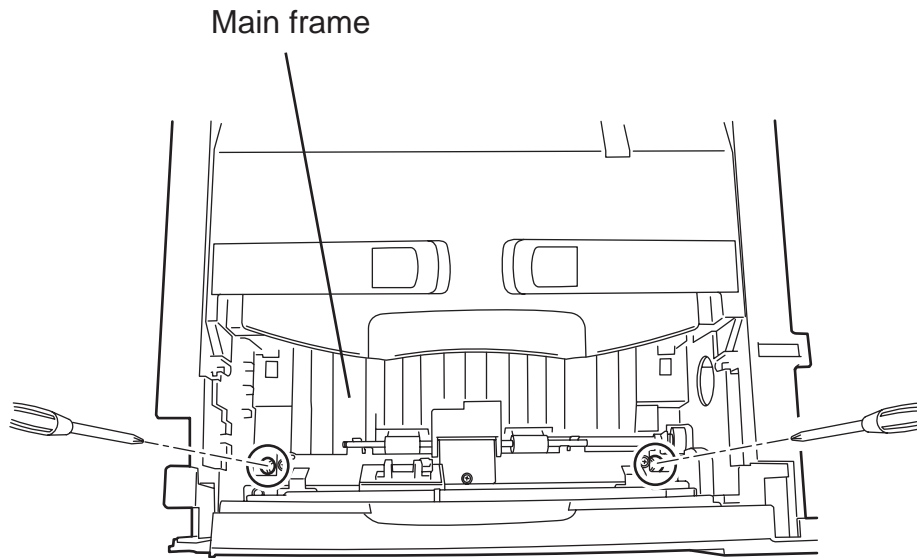


7. Remove the E-Rings at the both side of the FEED ROLLER AP and FEED GEAR 16.
8. Pull out the FEED ROLLER AP while pulling up the MAIN FRAME.

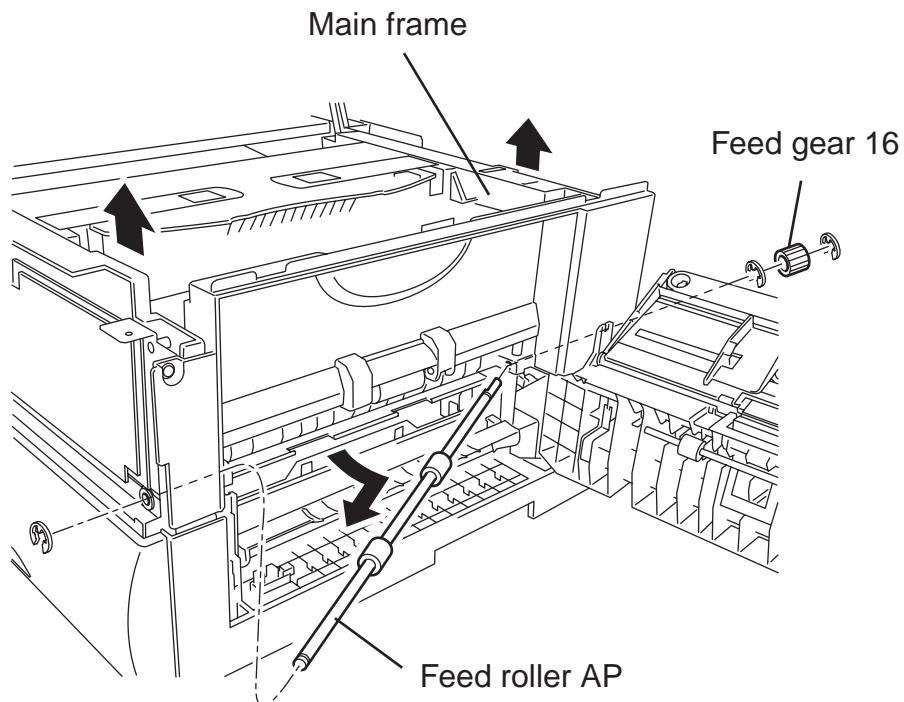



## PSS

1. Remove the toner cartridge and the drum cartridge.
2. Remove the screw, and then remove the PRESS SPRING B. Remove the RELEASE LEVER and the PRESS ROLLER BP.
3. Remove the PSS COVER and remove the screw. Pull out the PSS and disconnect the connector.

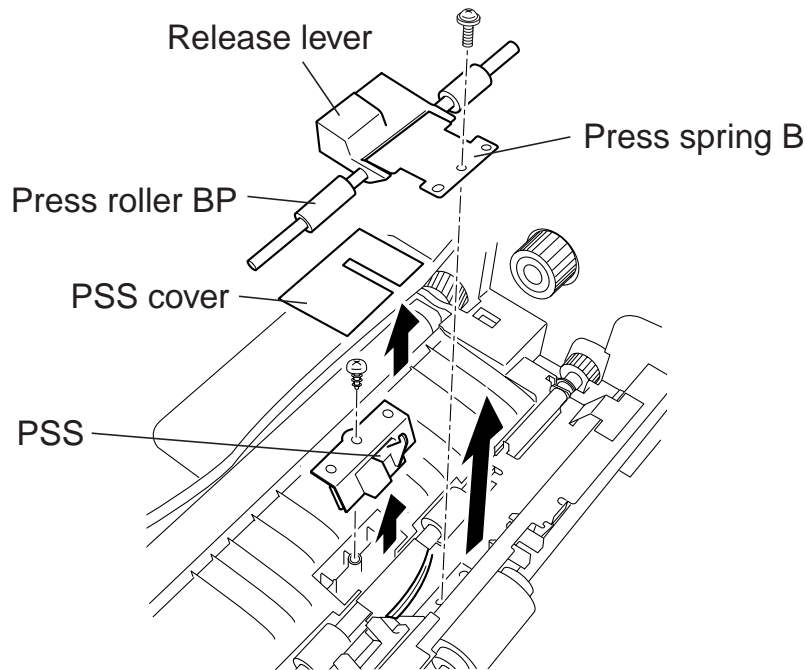


## FAN, DUCT

Perform the procedure of step 1 through 3 in “**POWER SUPPLY UNIT,**” page 5-15.


## LED PRINT HEAD

1. Open the printer cover.
2. Remove the E-rings on the both side and pull out the LED print head. Disconnect two connectors.

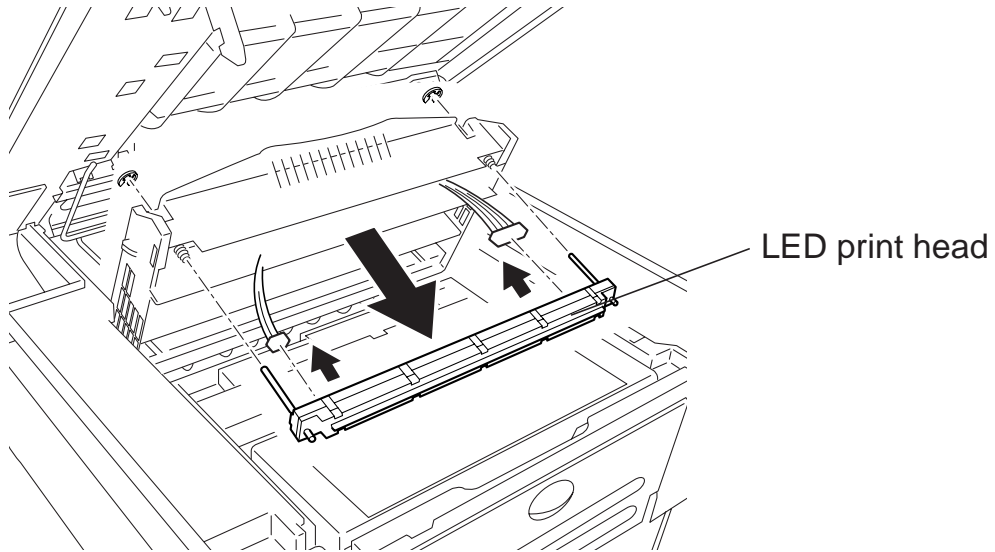


## JCOP

1. Open the Side cover.
2. Disconnect the connector of the JCOP
3. Release the tab of the JCOP, and then remove the JCOP.

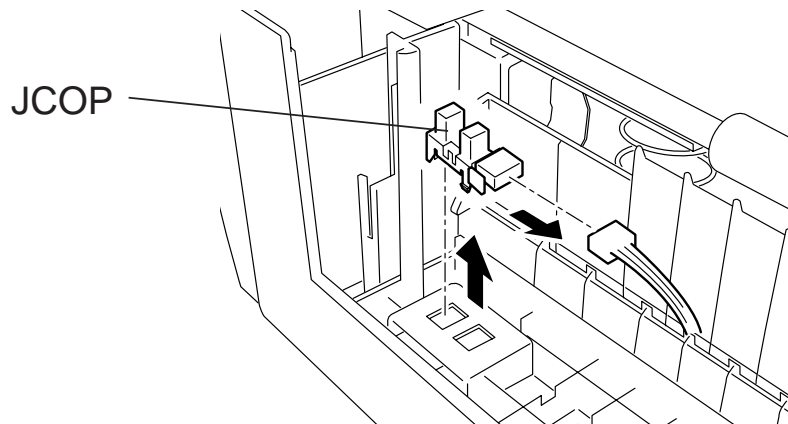

## BYPASS TRAY


1. Open the Side cover.
2. To remove the BYPASS TRAY, release the tab at the front side of the BYPASS TRAY first, then release the other.

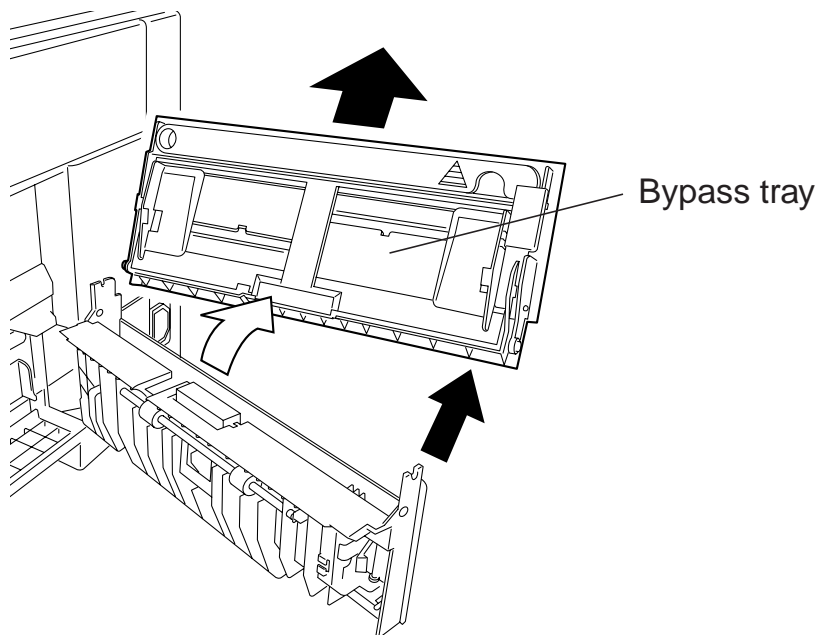

## 5.3 Adjustment

### 5.3.1 Adjustment of Retard roller pressure

When the bad document transportation or document separation is occurs even if the rollers dose not wear or uncleanness, adjust the Retard roller pressure.

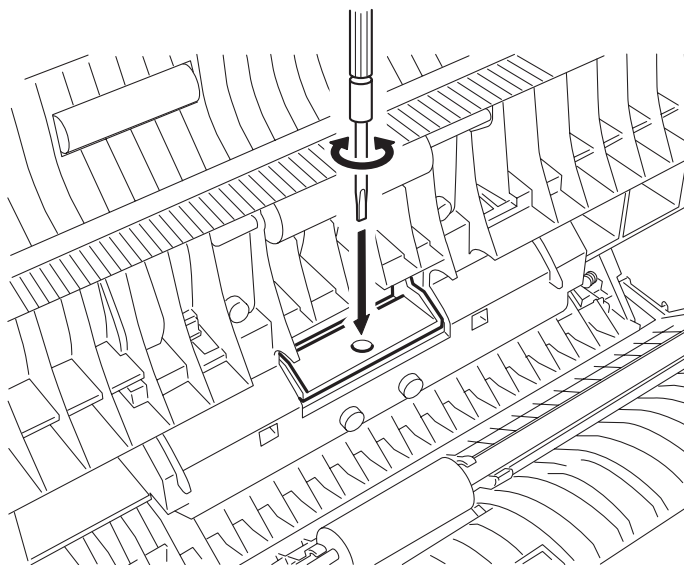

Insert the precision screwdriver into the hole of the Inner guide A as illustration. Then turn the separation pressure adjustment screw with referring the following table.

Rotate direction	Retard roller pressure	Document Feeding	Document Separation
Counterclockwise	Up	To be good	To be bad
Clockwise	Down	To be bad	To be good

# Section 6

## Options

### 6.1 Memory Upgrade

An optional 8 MB document memory upgrade is available for the MFX-1200.


An optional 8 MB or 24 MB document memory upgrade is available for the MFX-1600.

#### Packaging contents:

- (1) Memory PCB ..... 1
- (2) Spacer ..... 1

#### Installation

1. Turn the fax machine off and remove the power cord and telephone line cord.
2. Remove the REAR COVER and then remove the SHIELD PLATE.
3. Attach the SPACER to the expansible MEMORY PCB.
4. Connect the MEMORY PCB to the connector (P16) on the unit's Main control PCB.

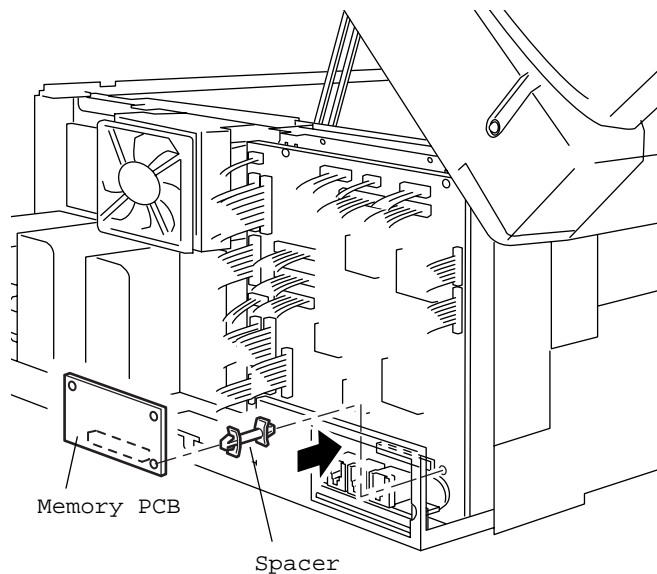

5. Plug the power cord and turn the unit on.
6. Clear the DRAM backup (Press **Program key**, \*, **G(07)**, **ENTER**).  
**Important:** The DRAM clear setting will erase all documents in memory.
7. Perform a DRAM check whenever an optional memory upgrade is added to the unit.  
(Press **Program key**, \*, **B(02)**, **F(06)**. See page 3-68 for more detail of the DRAM check.)

8. Print the Machine setting list (Press **Program key, E, 1, 0, 1, ENTER**). Check the memory amount printed on the upper left part of the Machine setting list.

** Machine Settings **	
8192 KB	21 Aug 2000 11:35
Language	English
1st Cassette	A4
Bypass Tray	A4
Soft Key 1	Energy Saving
Soft Key 2	Security
Soft Key 3	Memory Tx

Total memory	Printed memory amount
8 MB(standard)	8192 KB
8 MB + 8MB	16384 KB
8 MB + 24 MB (MFX-1600 only)	32768 KB

9. Re-attach the SHIELD PLATE and REAR COVER.  
10. Re-plug the telephone line cord.

The following table shows the memory capacity.

Total memory	Memory capacity
8 MB(standard)	Approx. 650 pages
8 MB + 8MB	Approx. 650 pages plus 680 pages
8 MB + 24 MB (MFX-1600 only)	Approx. 650 pages plus 2040 pages

**Note:** Using the ITU-T Test Document 1 to a Muratec fax machine with normal resolution.


## 6.2 Attaching an optional handset

### Packaging contents:


- (1) Telephone handset (with curl cord) ..... 1
- (2) Handset holder ..... 1
- (3) Cord holder ..... 1
- (4) Screw ..... 2

### Installation

1. Turn the fax machine off and remove the power cord and telephone line cord.
2. Using a Phillips-head screwdriver, attach the cord holder and handset holder to the left side of the machine, using the screws included with the handset holder.

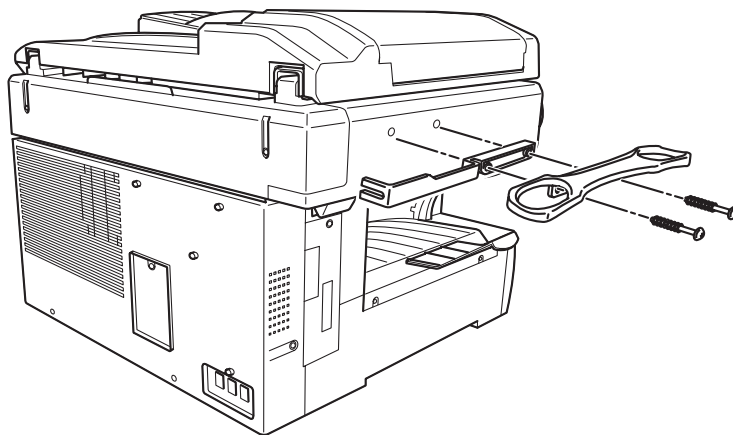

3. Plug one end of the handset cord into the PHONE1 jack on the rear side of the machine.

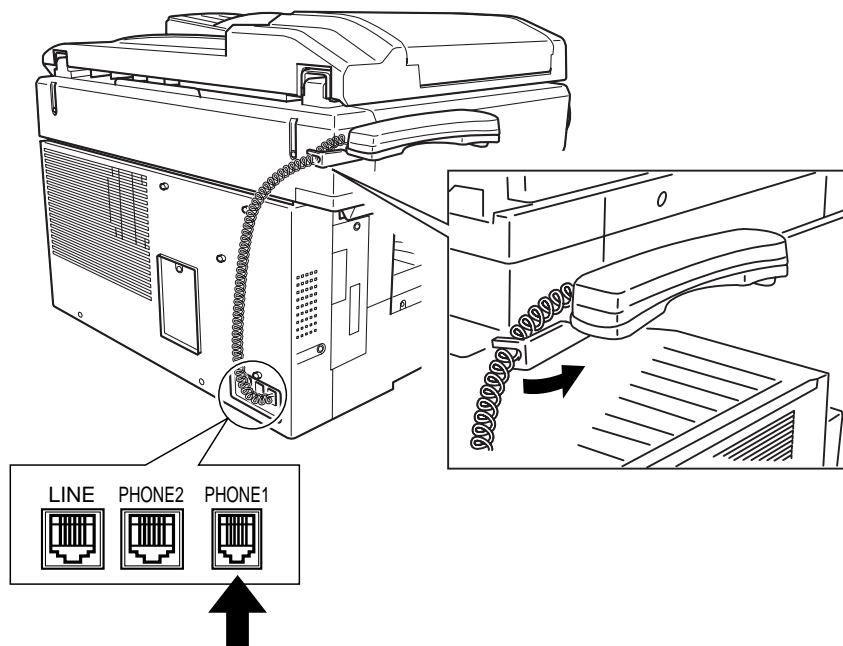


## 6.3 RS-232C interface

### Packaging contents:


(1) RS-232C PCB .....	1
(2) Connector PCB .....	1
(3) Bracket .....	1
(4) Connection cable.....	1
(5) One screw .....	1
(6) Ferrite core .....	1
(7) Operating instructions .....	1

### Installation

1. Turn the fax machine off.
2. Remove two screws on the RS-232C PCB, and then attach the bracket to the RS-232C PCB with them.  
Join the RS-232C PCB and the Connector PCB as shown below:




3. Remove the mounting screw holding the option cover A in place. Then remove the option cover A.
4. Use pliers to gently punch out the rectangular connector space located in the right of the option cover A.

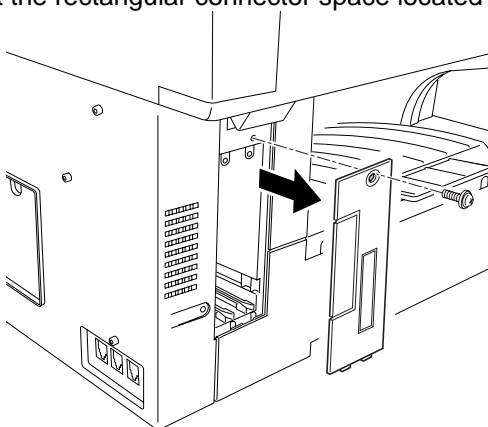





5. Open the top cover.
6. Remove five mounting screws holding the rear cover in place. Then remove the rear cover.
7. Remove the shield plate.
8. Connect the RS-232C PCB assembly to the Main control PCB with the connection cable as shown below: (Connect the cable to the P14D connector on the main PCB.)

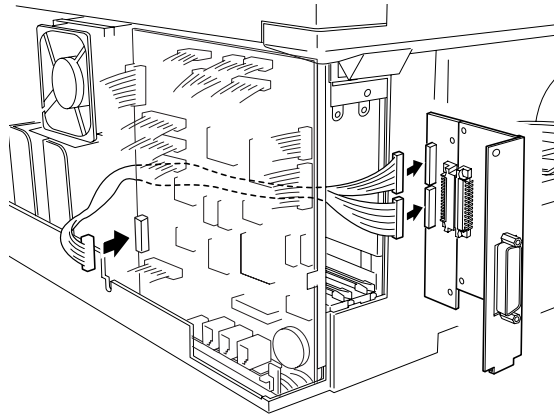

9. Insert the RS-232C PCB assembly into the slot. Then use the mounting screw to attach the assembly.
10. Re-attach the shield plate.

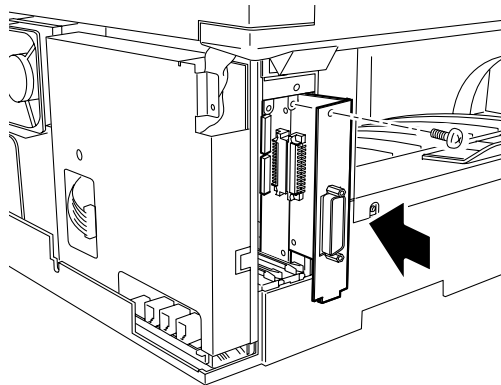

11. Re-attach the option cover using its mounting screw.
12. Re-attach the rear cover using five mounting screws.
13. Attach the ferrite core to your RS-232C cable.

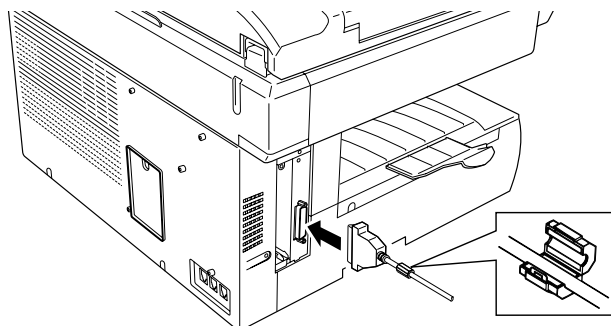

14. Connect one end of the RS-232C interface cable to the RS-232C interface port on your fax machine.  
**Note:** Please see next page for more details on the RS-232C cable.
15. Connect the other end of the RS-232C cable to the computer's RS-232C port.

## RS-232C interface cable

The RS-232C port on your newly installed RS-232C interface has a DB-25 (standard 25-pin serial) female receptacle which accepts a male DB-25 cable plug. Your computer's port may have either a DB-25 or DB-9 (9-pin) receptacle.

If necessary, see the chart below for detailed information on the pin assignment for your fax machine's RS232C port.

**Note:** For more information on the computer's serial interface port, see the computer's operating instructions.


**Note:** Please use the RS-232C interface cable shorter than 3 meters.

### Pin assignment


Pin No.	Signal code	Signal name	Contents
2	TXD	Transmitted data	Data signal sent from computer to your fax.
3	RXD	Received data	The data sent to computer by your fax.
4	RTS	Request to send	Signal for request to send data.
5	CTS	Clear to send	Data Enable signal for data transmission from your fax to your computer.
6	DSR	DCE ready	Turning on always.
7	SG	Signal ground	Ground for signal.
20	DTR	DTE ready	Data Terminal Enable – ready to communicate

## Signal direction

### 25-pin type

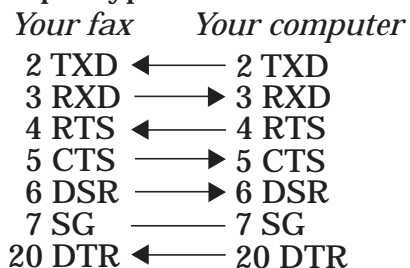

### 9-pin type

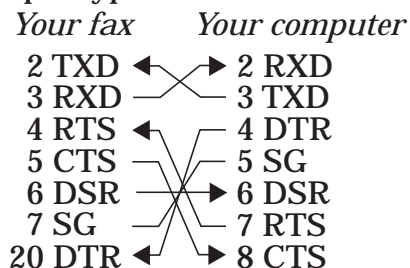

## RS-232C Test

This mode is for return back test of the RS-232C port.

Refer to "RS-232C test," page 3-69 for the procedure.

## 6.3 Page Counter

The mechanical counter shows the total number of pages the machine prints.


**Note:** This device counts up to 999,999 pages. If more pages are printed, the counter resets to zero and begins counting the new pages from that point.

### Packaging contents:

- (1) Mechanical Counter ..... 1
- (2) Connection harness ..... 1

### Installation

1. Turn the power off.
2. Remove the rear cover and shield plate.
3. Attach the connection harness to the connector labeled P21 on the main control PCB. Then re-attach the shield plate.

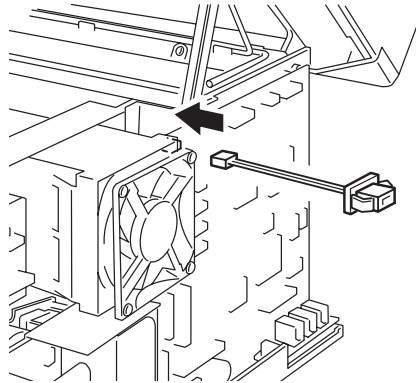


4. Use nippers (or cutters) to gently punch out the perforated panel on the left side of the rear cover.
5. Insert the mechanical counter into this hole, being careful to pass the counter harness through the hole first. The counter will “click” into place when inserted correctly.

**Note:** The mechanical counter should be installed so that the small circle on its front is positioned in the bottom right corner, as in the picture to the right.

6. Connect the counter harness to the connection harness.
7. Re-attach the rear cover.

**Note:** Do not forget connecting the speaker harness.

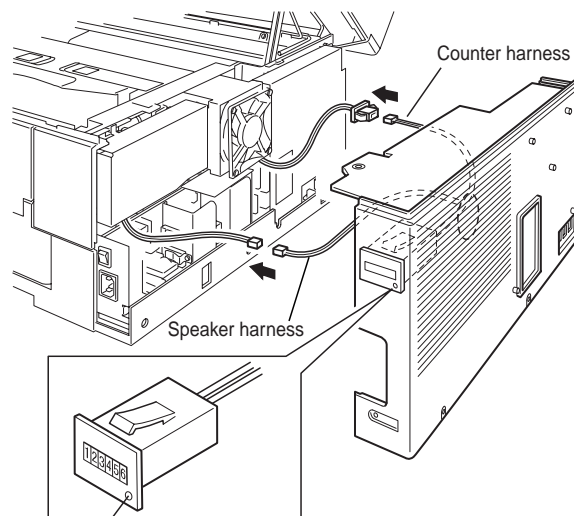

Circle on page counter should be positioned to the bottom left, when installed.

## 6.4 AL-200 (only for MFX-1600)


### Packaging contents:

(1) Second Phone Line Module — Includes the NCU and Modem PCBs .....	1
(2) Screws.....	4
(3) Connection cable.....	1
(4) Telephone line cord.....	1
(5) Second Phone Line Module operating instructions .....	1


### Installation

**Note:** Turn off the fax machine before proceeding.

1. Open the top cover. Remove the five mounting screws holding the rear cover in place. Disconnect the speaker connector, and then remove the rear cover.
2. Remove the harness cover mounting screw on the rear cover. Then remove the harness cover.  
You will pass the connection cable through this hole.

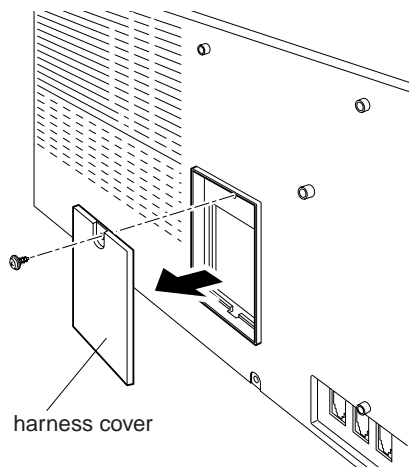


3. Remove four screws on the cover of the second phone line module. Then remove the cover.
4. Remove the angle plate mounting screw. Then remove the four angle plates.

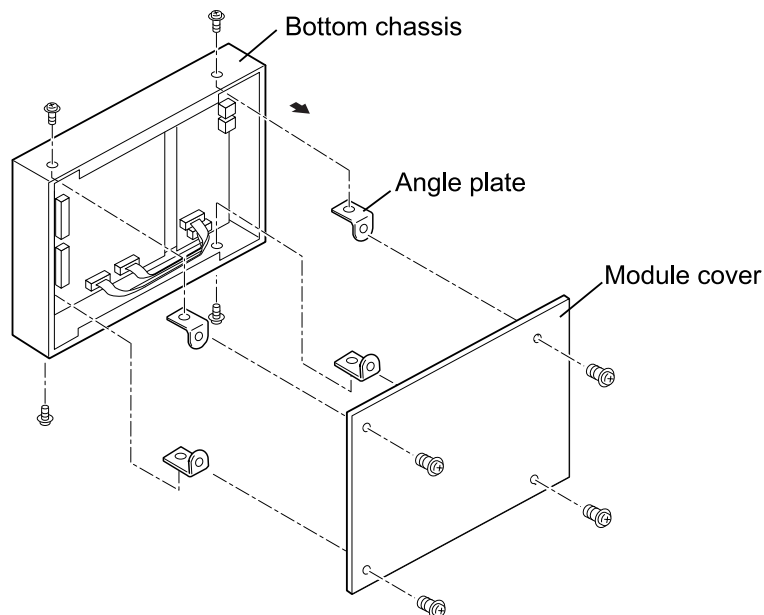


5. Remove the ground wire mounting screw on the Second phone line module. Then remove the ground wire.

**Note:** Keep the ground wire to re-attach it in step 13.

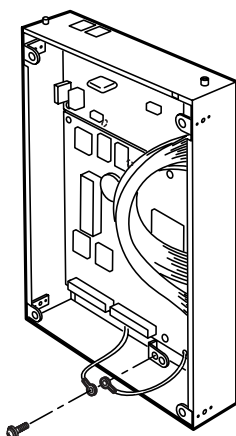


6. Remove two NCU PCB mounting screws and release two tabs as shown. Then remove the NCU PCB from the bottom chassis of the second phone line module.


7. Release four tabs on the Modem PCB. Then remove the Modem PCB.

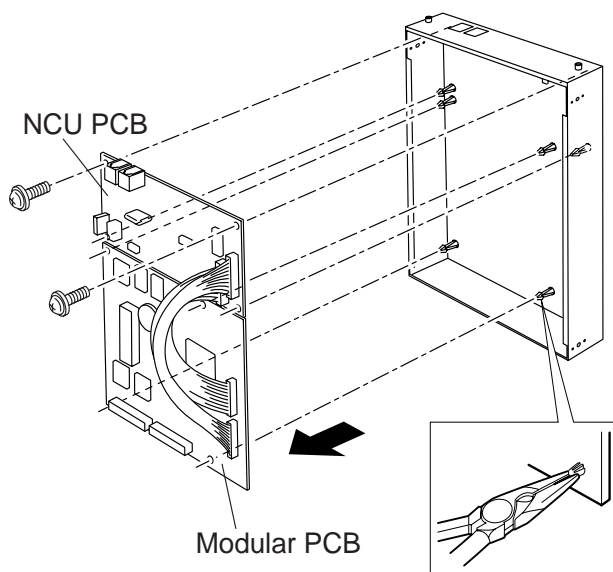


8. Use four screws included with the module to attach the bottom chassis to the rear cover.

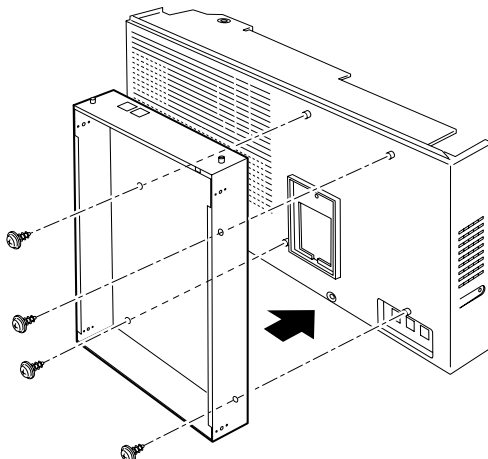


9. Re-attach the NCU PCB and the Modem PCB to the bottom chassis using two screws and six tabs.
10. Use the screws to re-attach the four angle plates to the bottom chassis.

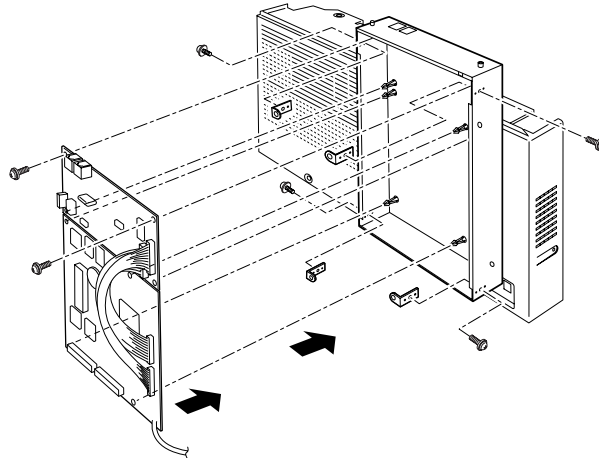


11. Plug the connection cable into the P14A connector on the Main control PCB. Remove the mounting screw on the lower left of the shield plate. Then attach the ground wire using the screw.

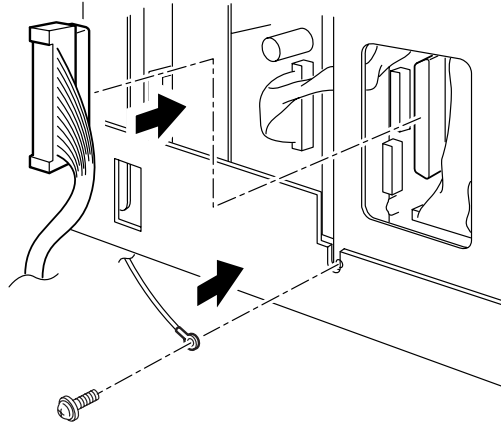


12. Pass the connection cable and the ground wire through the hole of the rear cover.
13. Connect the speaker connector, and then use the five screws to re-attach the rear cover.

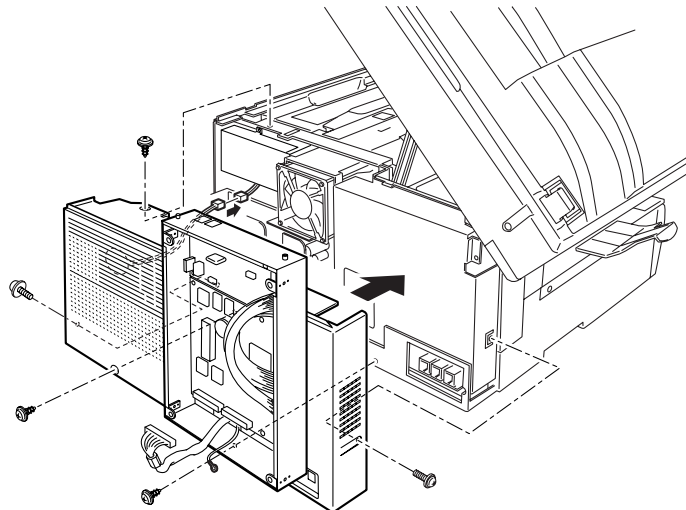

14. Re-attach two ground wire to the Second phone line module's bottom chassis using the screw. Plug the connection cable into the P1(IN) connector on the Second phone line module's Modem PCB.

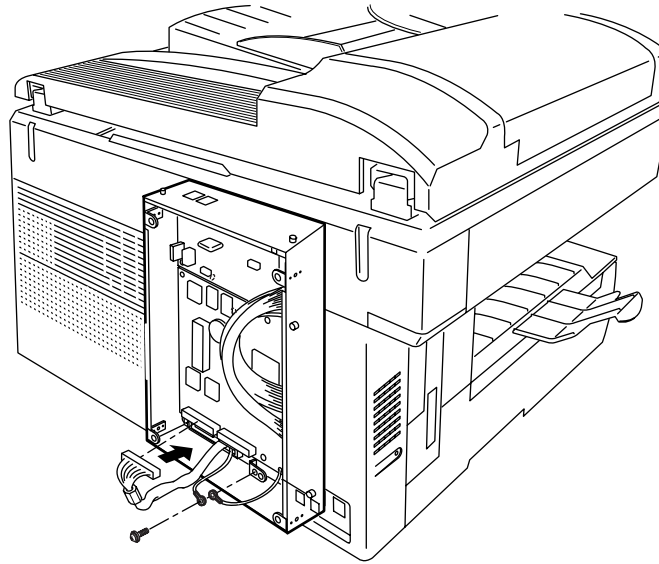


15. Use the four screws to re-attach the second phone line module cover.
16. Plug one end of the telephone line cord into the LINE 2 jack found on the second phone line module. Plug the other end of the cord into a standard telephone wall jack, just as you would plug in a phone.

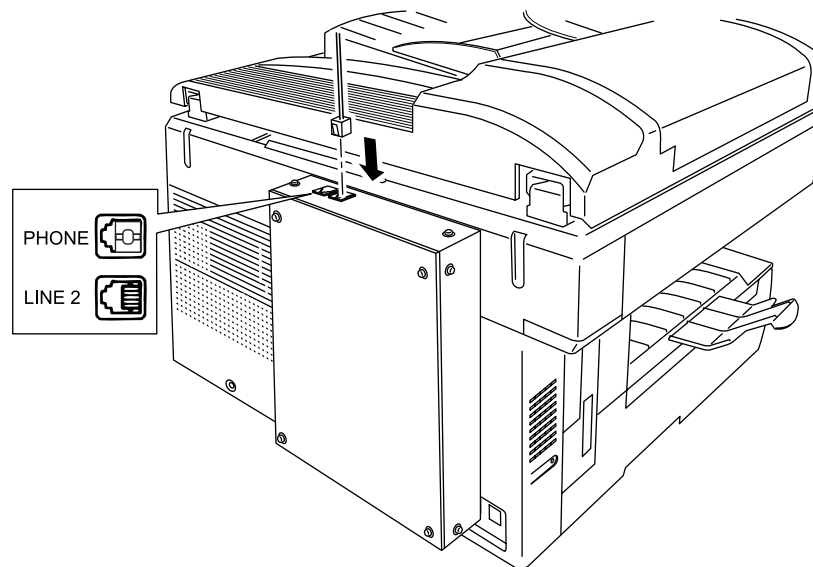

## 6.5 OP-100/NP-200


### Packaging contents:

Here's what should be in the OP-100 package:

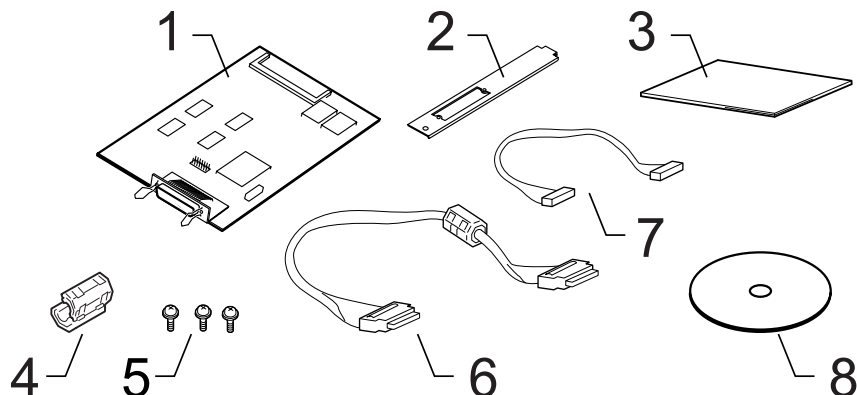

1. Printer Control PCB .....	1
2. Printer PCB Bracket.....	1
3. Operating instructions.....	1
4. Ferrite core .....	1
5. Screws .....	3
6. Connection cable A with Ferrite core.....	1
7. Connection cable B.....	1
8. CD-ROM of the Printer driver .....	1

Here's what should be in the NP-200 package:

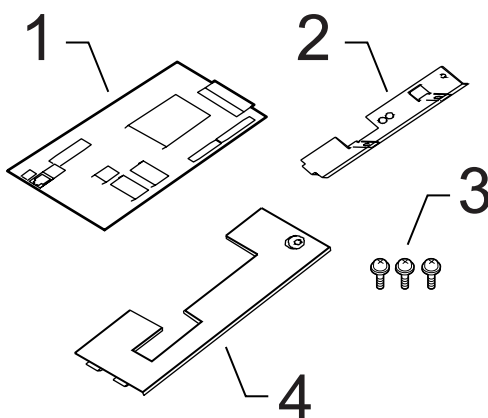


1. Network Interface Card (NIC) .....	1
2. NIC PCB Bracket.....	1
3. Screws (two NIC PCB bracket attaching screws and one NIC securing screw) .....	3
4. Option cover B.....	1



## Attaching the OP-100 (and NP-200)

**Note:** Make sure to turn off the fax machine before proceeding the following steps.


1. Attach the BRACKET to the PRINTER CONTROL PCB using the hexagonal head screws.

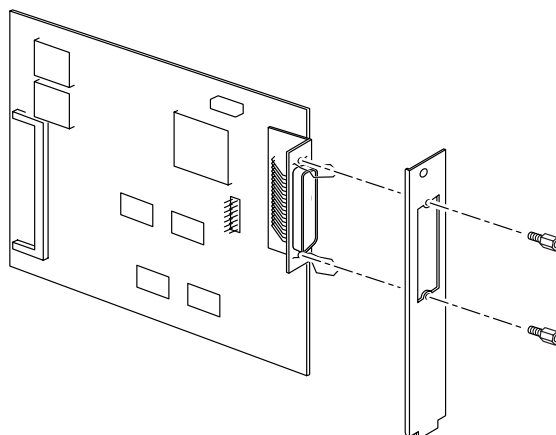


**Note:** The OP-100 can attach the DIMM on the board for memory upgrade.

The DIMM which have the following specifications can be attached:


- 144 pin JEDEC standard, 8byte Dual In-line Memory Module
- Synchronous DRAM S.O.DIMM.
- Single 3.3V power supply.

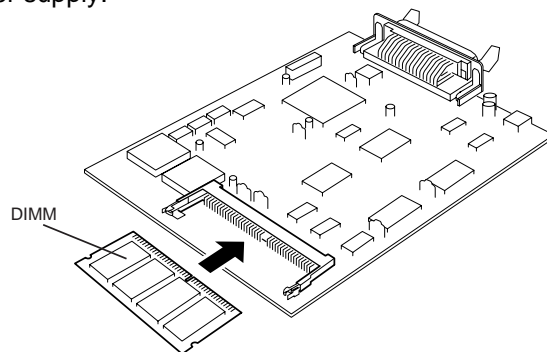


If you also attaching the NP-200, attach the BRACKET to the PRINTER CONTROL PCB using the hexagonal head screws.

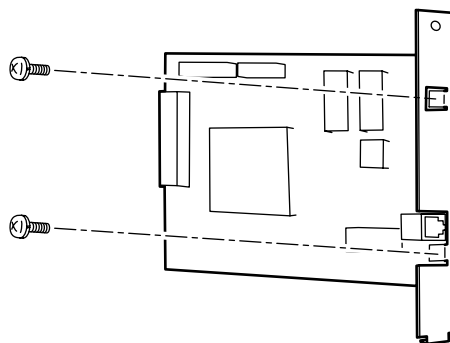

2. Remove the REAR COVER and OPTION COVER A.
3. Remove the SHIELD PLATE.
4. Remove the CABLE CAP from the CONNECTION CABLE A. Then connect the CONNECTION CABLE A to the CON2 connector on the PRINTER CONTROL PCB.
5. Connect the CONNECTION CABLE B to the CON1 connector on the PRINTER CONTROL PCB.
6. Insert the PRINTER CONTROL PCB into its slot, while passing the other end of the CONNECTION CABLE A and B through the rear frame.
7. Plug the other end of the CONNECTION CABLE A to the P14A connector on the MAIN CONTROL PCB.
8. Plug the other end of the CONNECTION CABLE B to the P14B connector on the MAIN CONTROL PCB.

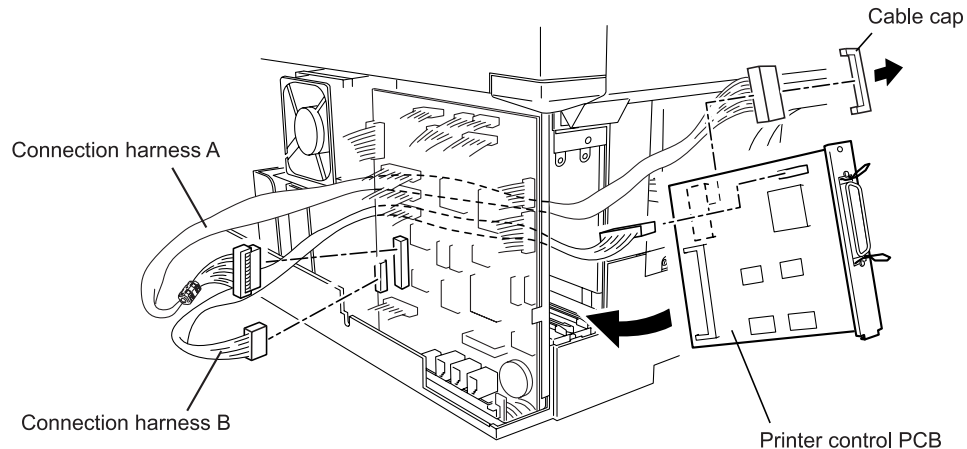


If you are installing the NP-200, connect the NIC PCB to the Printer controller PCB.


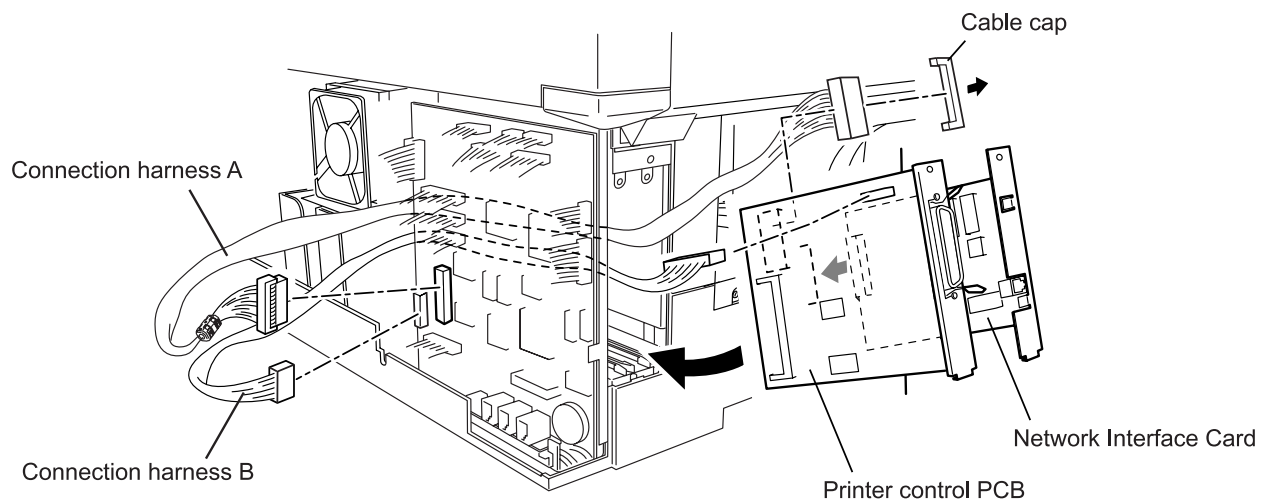


**Note:** The connection cable is not such long actually.


9. Insert the PRINTER CONTROL PCB (and NIC PCB) completely and then secure it using a screw.
10. Re-attach the SHIELD PLATE.

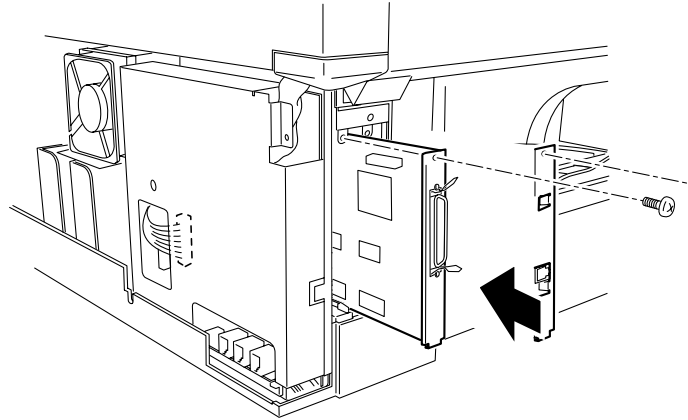


11. Re-attach the REAR COVER.
12. Cut out the rectangular connector space for OP-100 on the OPTION COVER A. Then attach the OPTION COVER A.  
If you installed both the OP-100 and NP-200, attach the OPTION COVER B instead of the OPTION COVER A. OPTION COVER B will be included in the NP-200 kit's carton box.

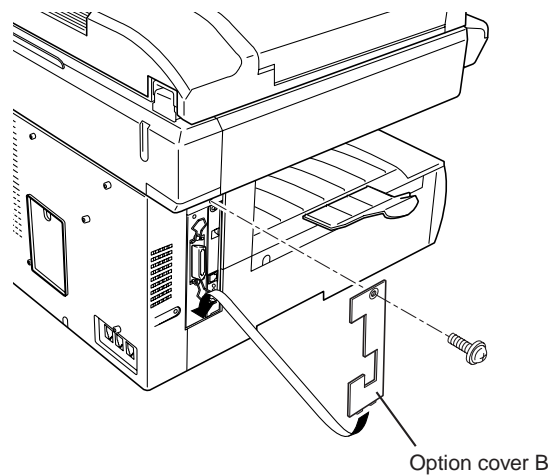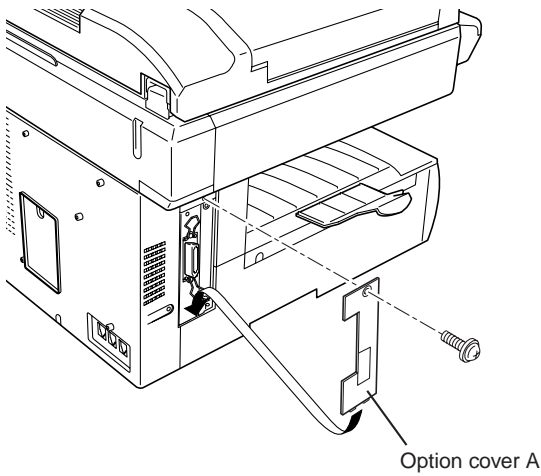

13. Connect the bi-directional parallel printer cable to the printer interface port of OP-100.  
**Note:** Attach the ferrite core included in the OP-100's carton box to the printer cable as shown below.  
**Note:** If using the NP-200, skip to step 14.

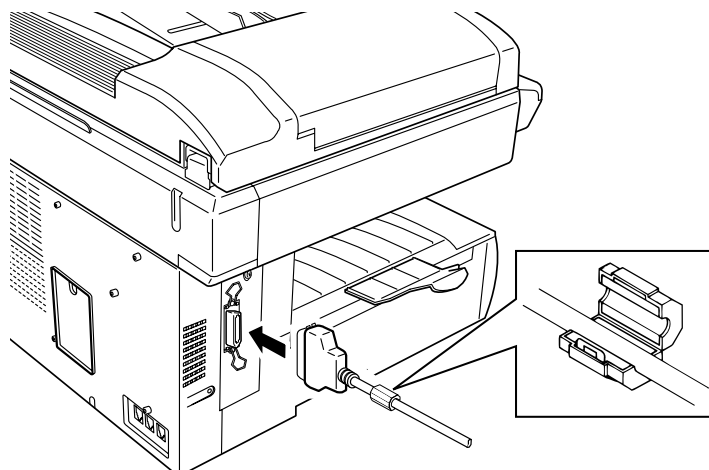

14. Snap the plug's wire clips onto the printer cable.
15. Connect the other end of the printer cable to the computer's parallel port.
16. If using the NP-200, connect the printer to the network by using the network cable.

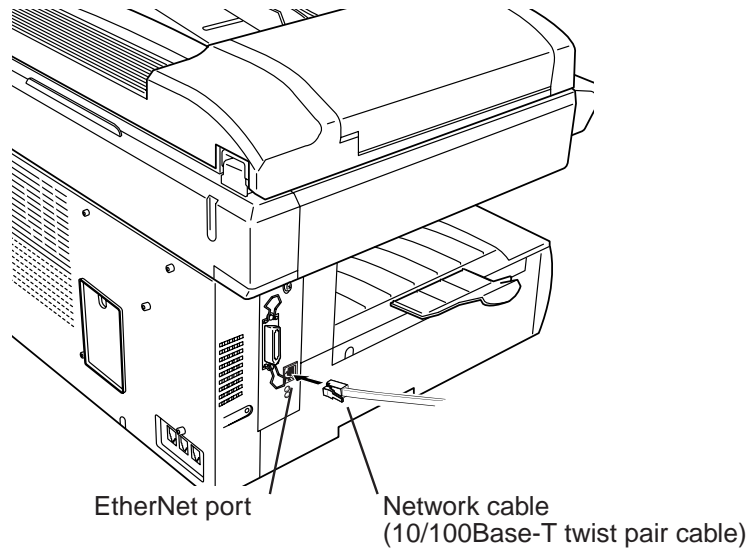

## Installing the Printer driver

See Operating Instructions.


## 6.6 Attaching the 2-Bin tray

### Packaging contents:


(1) 2-Bin unit (with connection cable) .....	1
(2) Screws.....	4
(3) Paper tray for the 2-Bin unit .....	1

### Installation

1. Remove the REAR COVER.
2. Remove the TOP LEFT COVER.
3. Remove the OPTION COVER A.
4. Remove the EXIT TRAY.
5. Remove the RX EXIT COVER.
6. Separate the RX EXIT COVER A and B.
7. Remove the PCB SHIELD. Do not need to remove the CONNECT PRINTER PCB.

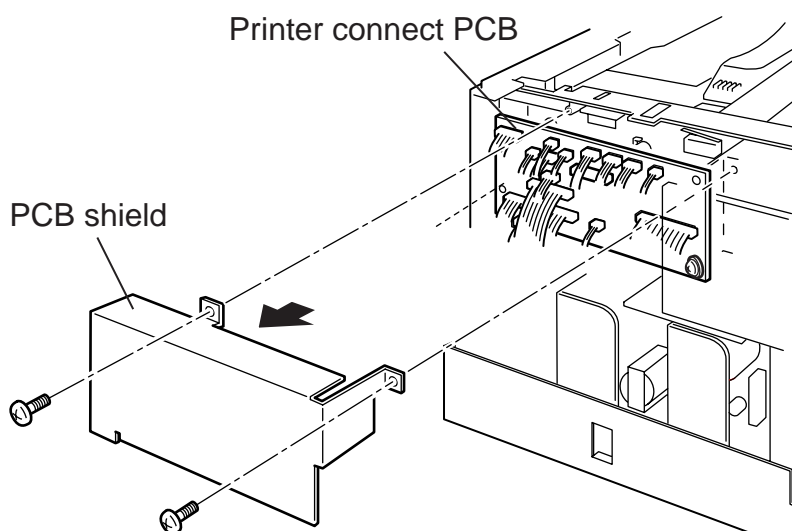


8. Attach the 2-Bin tray to the machine, while passing the connection harness through the machine frame.
9. Connect the connection harness to the connector P1314 on the CONNECT PRINTER PCB.

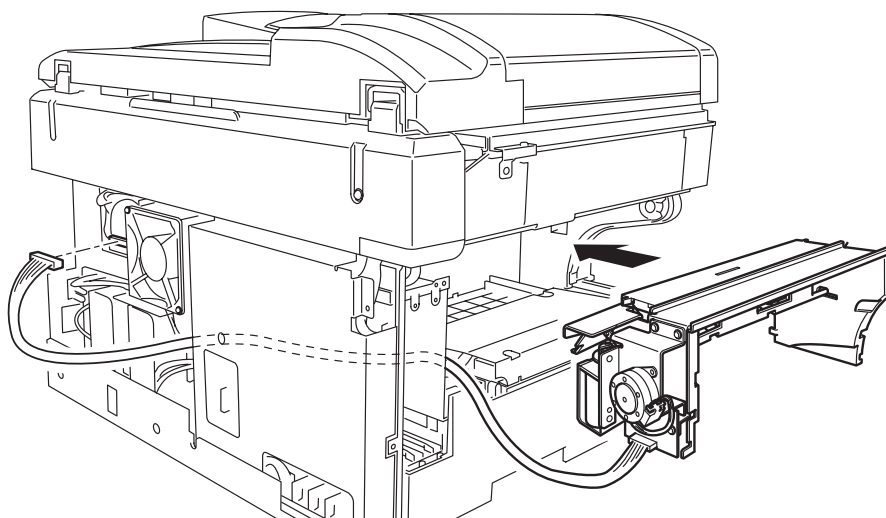


**Note:** The connection cable is not such long actually.

10. And then secure the 2-Bin tray using the four screws.

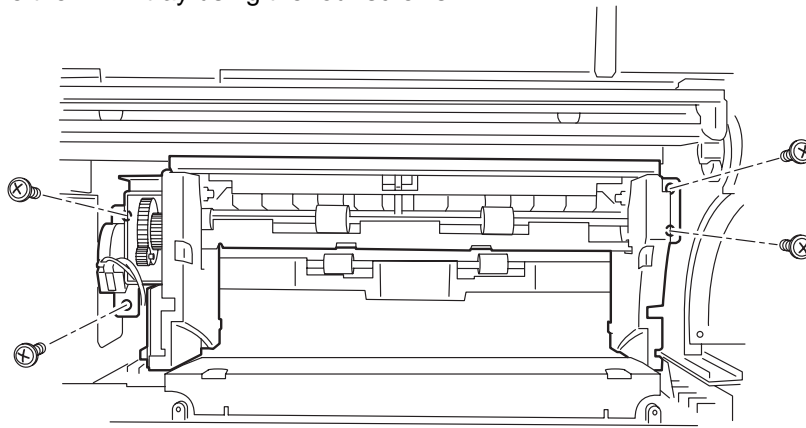


11. Re-attach the PCB SHIELD.

12. Re-attach the RX EXIT COVER A.

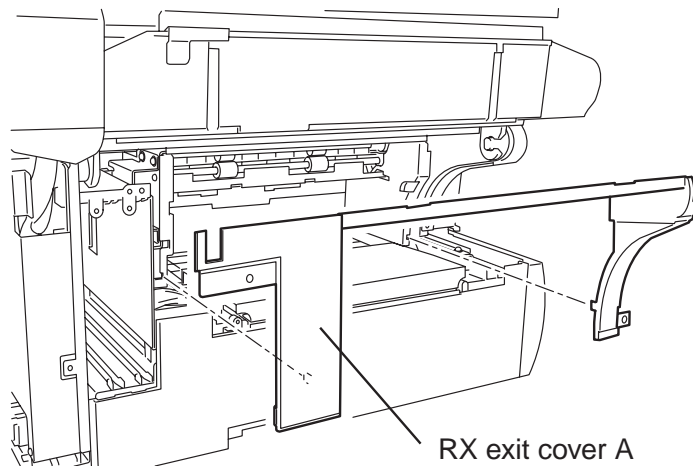

13 Re-attach the EXIT TRAY, TOP LEFT COVER, OPTION COVER A, PCB SHIELD and REAR COVER.


14. Attach the paper tray of the 2-Bin unit.

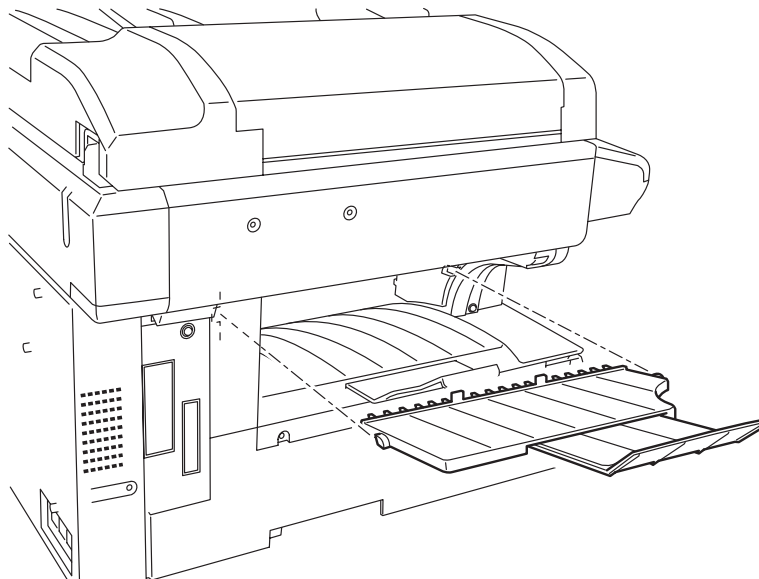

## <References>


### **REAR COVER**

1. Open the top cover.
2. Remove the five rear cover mounting screws.
3. Disconnect the speaker connector and remove the REAR COVER.

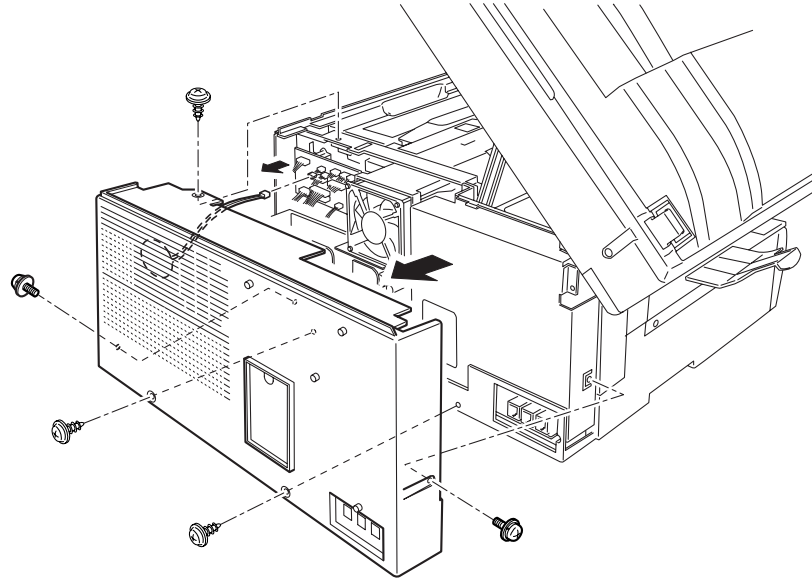


### **TOP FRONT COVER / TOP RIGHT COVER / TOP LEFT COVER**

1. Open the platen cover.
2. Remove the screw covers.
3. Remove the three top front cover mounting screws, and then remove the TOP FRONT COVER.
4. Remove the two top right cover mounting screws, and then remove the TOP RIGHT COVER.
5. Remove the two top left cover mounting screws, and then remove the TOP LEFT COVER.

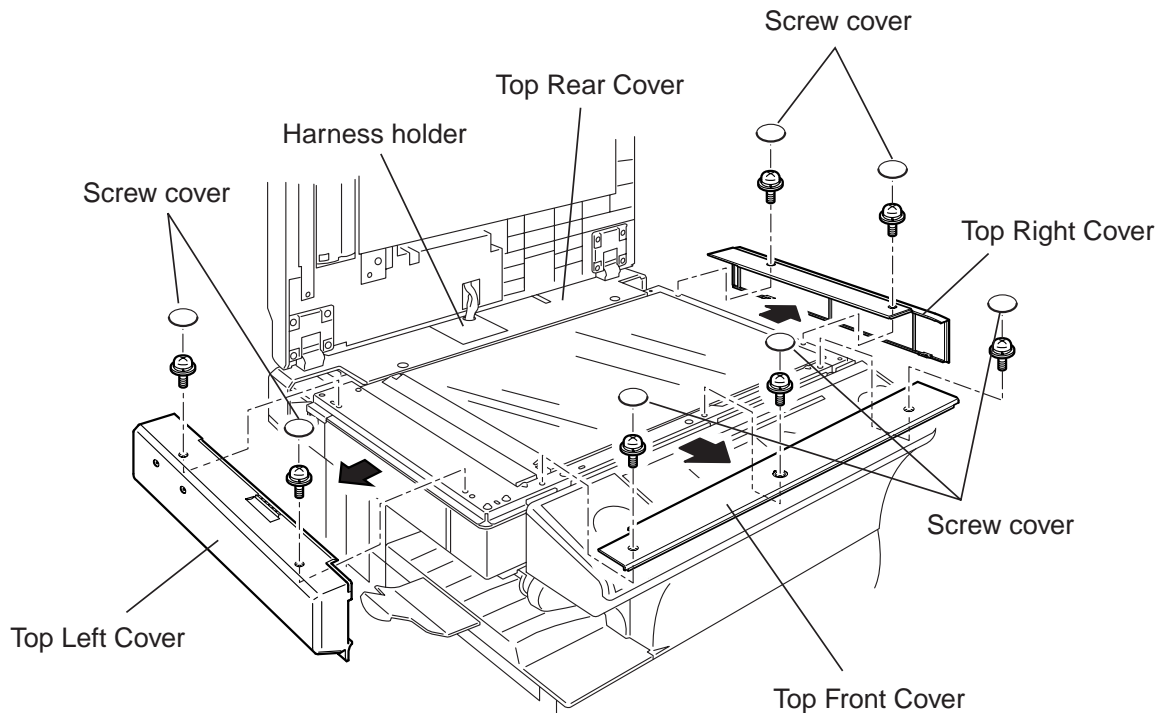


## ***OPTION COVER A***

1. Remove the option cover A mounting screw.
2. Remove the OPTION COVER A.

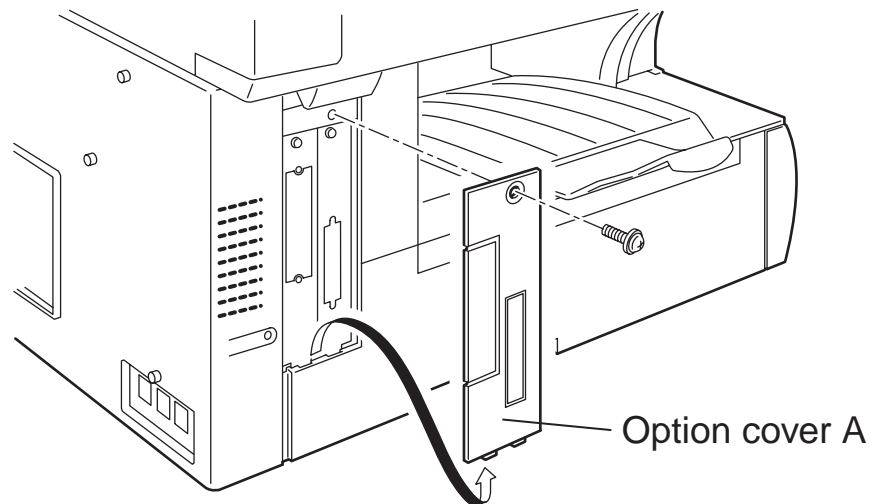

## ***EXIT TRAY***


1. Open the cassette.
2. Remove the three exit tray mounting screws.
3. Remove the EXIT TRAY.

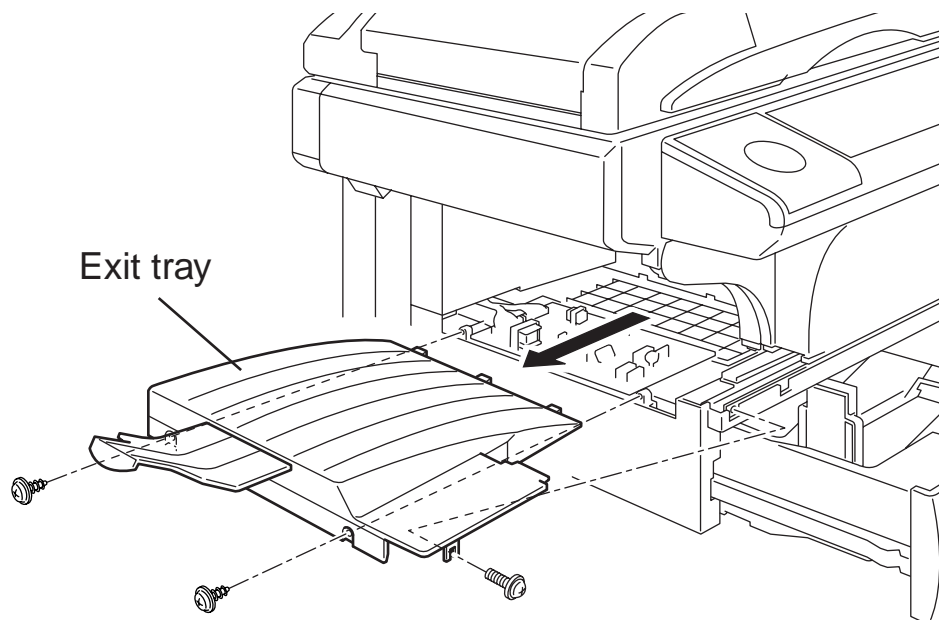




## ***RX EXIT COVER***

1. Remove the EXIT TRAY.
2. Remove the TOP LEFT COVER.
3. Remove the OPTION COVER A.
4. Remove the Rx exit cover mounting screw, and then remove the RX EXIT COVER.

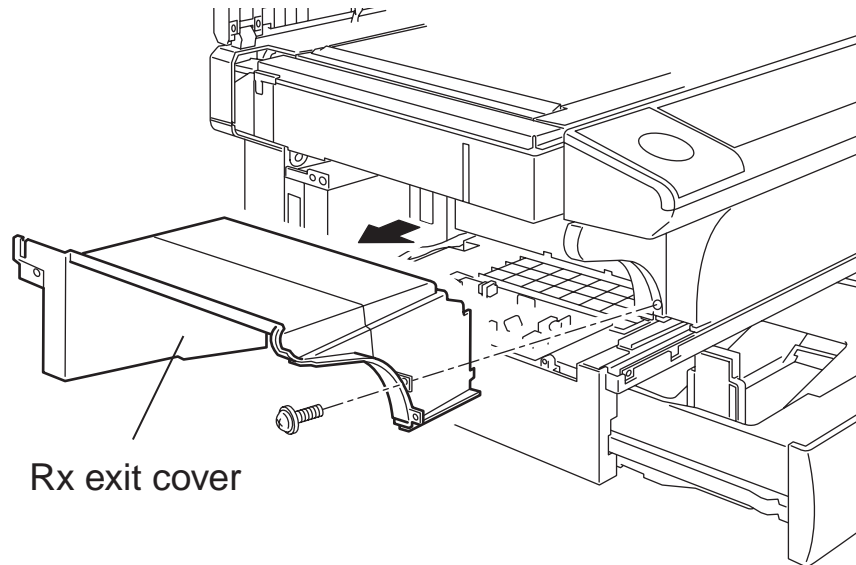

5. Separate the RX EXIT COVER A FROM B.

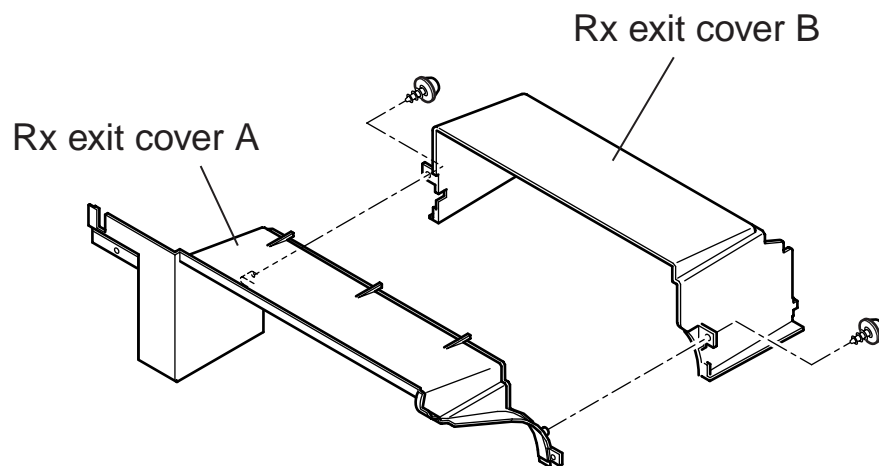


## 6.7 Second paper cassette

### Packaging contents:


- (1) Second cassette
- (2) Two screws

### Installation


1. Turn off your fax machine.
2. Remove six mounting screws holding the rear cover of the second cassette in place. Then remove the rear cover of the second cassette.

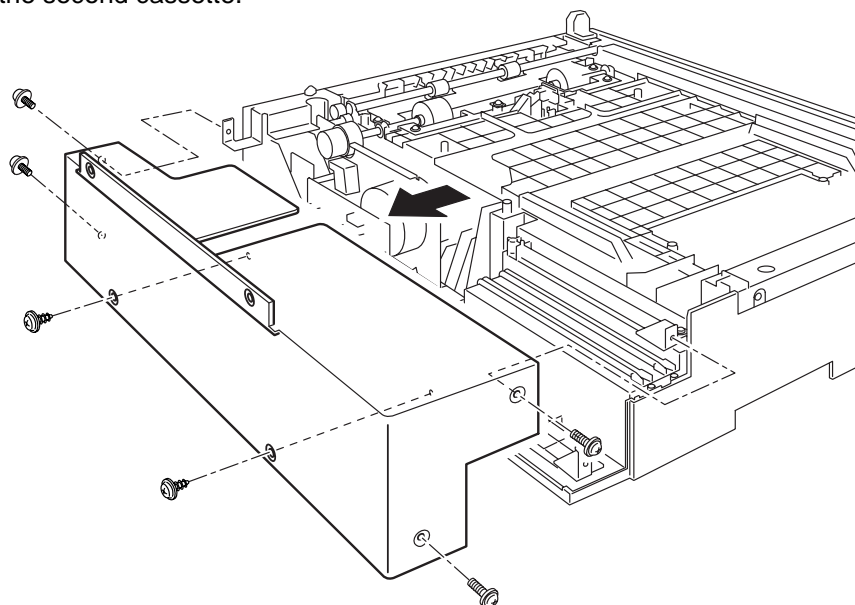

3. Open the top cover. Remove five mounting screws holding the rear cover of the fax machine in place. Disconnect the speaker connector, and then remove the rear cover of the fax machine.
4. Remove four mounting screws holding the shield plate in place. Then remove the shield plate.

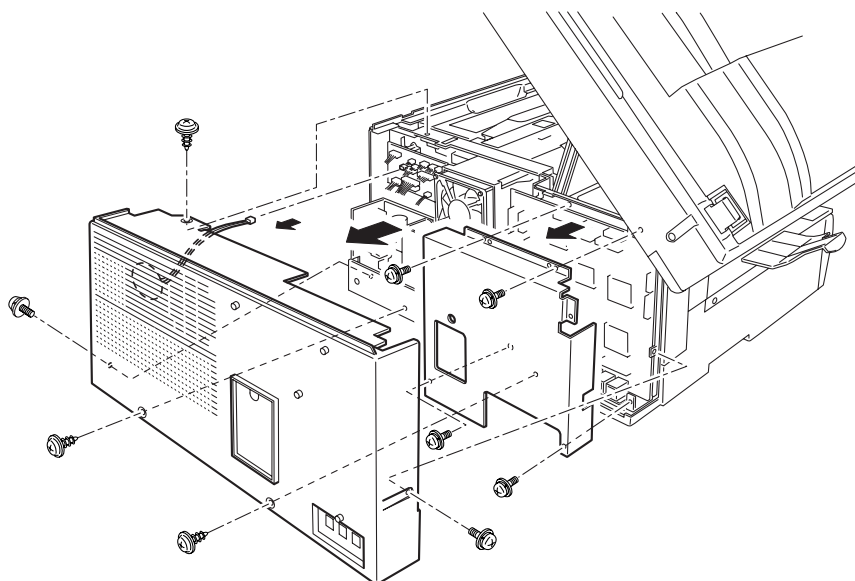


5. Release the tab of the harness door under the machine, and then remove the harness door.
6. Put the machine on the second cassette.

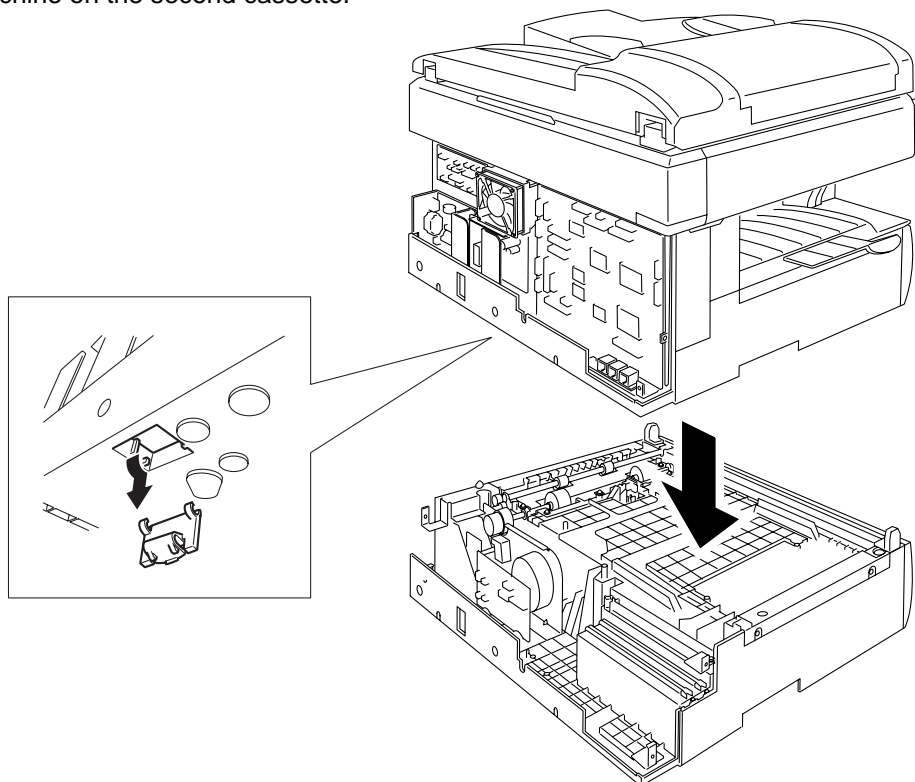

7. Pass the harness and the ground wire of the second cassette through the harness door. Connect the harness to the connector (P17) on the Main control PCB.
8. Re-attach the shield plate using four mounting screws.

**Note:** You should attach the ground wire at the lower left corner of the shield plate using the screw, as shown in the illustration.

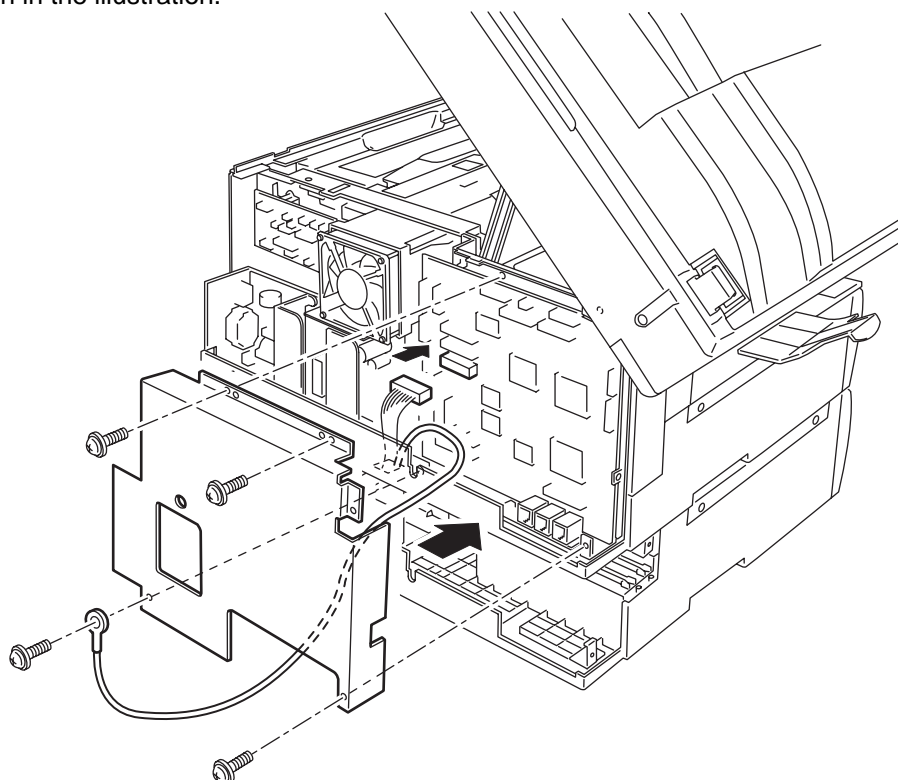


9. Re-attach the rear cover of the machine using three mounting screws except two screws at the rear side.


**Note:** Do not forget to connect the speaker connector when attaching the rear cover of the machine.

- 10 Re-attach the rear cover of the second cassette using two screws (3×10 mm) included in the option cassette box and six mounting screws (3×8 mm) as shown in the illustration.

**Note:** The remaining two screws (3×8 mm) will be used in next step.

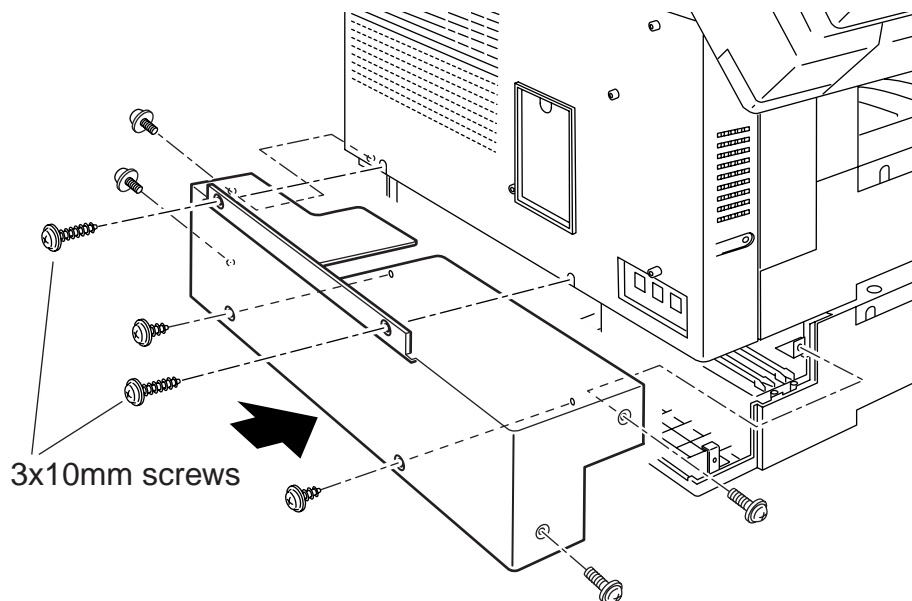

- 11 Pull out the first cassette, and then fix the machine and the second cassette using two screws as shown in the illustration.

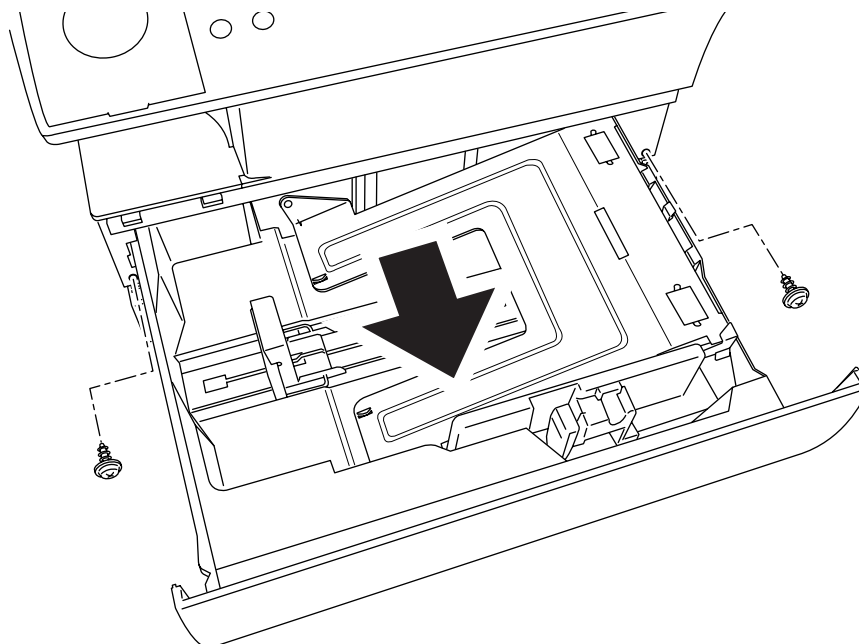

## Setting of the Paper Size

Default setting: USA version: Letter, Other version: A4

When you install the second cassette, you must set the paper size for it.

- 1 Press **Program key, B, 1, 0, 1, ENTER**. The LCD shows:

1st Cassette :A4 ←/→/Enter	or	1st Cassette :Ltr ←/→/Enter
-------------------------------	----	--------------------------------

- 2 Press **ENTER** to go to the setting for the second cassette. The LCD shows:

2nd Cassette :A4 ←/→/Enter	or	2nd Cassette :Ltr ←/→/Enter
-------------------------------	----	--------------------------------

- 3 Press ← or → of the cursor key until the recording paper size for the second cassette you want appears.  
The following paper sizes are available:

*USA version:* Letter, Legal, Half-letter

*Other version:* A4, A5, F4

- 4 Press ENTER, ENTER.  
Press **STOP** to return the machine to standby mode.